


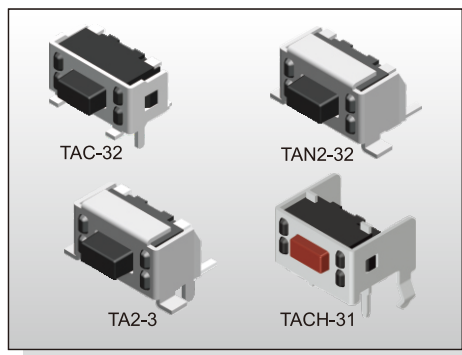

### FEATURES

- ※Side actuated
- ※Support/Ground pin option
- ※High solder strength


### APPLICATION

- ※Data storage, Server
- ※Instrumentation
- ※Audio, OA equipment


### SPECIFICATION

|                       |                     |       |  |
|-----------------------|---------------------|-------|--|
| Contact Rating        | 50mA, 12V DC        |       |  |
| Contact Resistance    | 100mΩ max.          |       |  |
| Insulation Resistance | 100MΩ min. 500V DC  |       |  |
| Dielectric Strength   | 250V AC/1 minute    |       |  |
| Operating Force       | 160±50gf, 260±50gf  | TAC-3 |  |
|                       | 160±50gf, White(W)  |       |  |
|                       | 160±50gf, Brown(N)  | TA2-3 |  |
|                       | 320±50gf, Salmon(S) |       |  |
| Travel                | 0.25mm              |       |  |
| Operating Life        | 50,000 cycles       |       |  |
| Operating Temp.       | -25°C ~ +70°C       |       |  |
| Storage Temp.         | -40°C ~ +80°C       |       |  |

### HOW TO ORDER

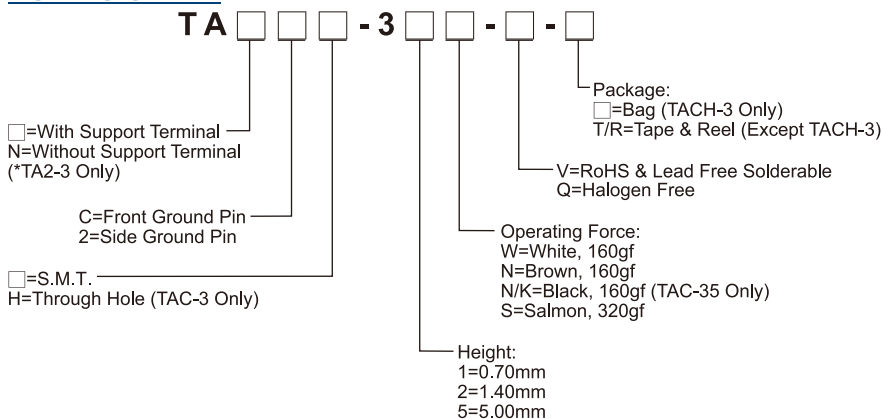




### CIRCUIT

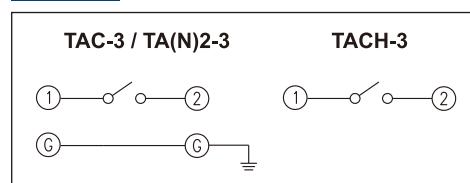


### PACKAGE

<Bag>  
500 pcs(TACH-3 Only)  
<Tape & Reel>  
900 pcs

### TAC-3

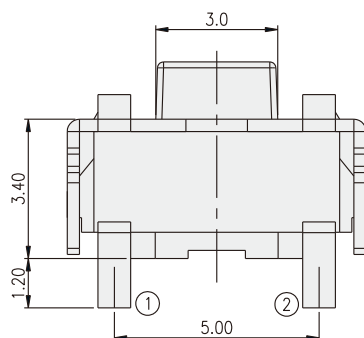
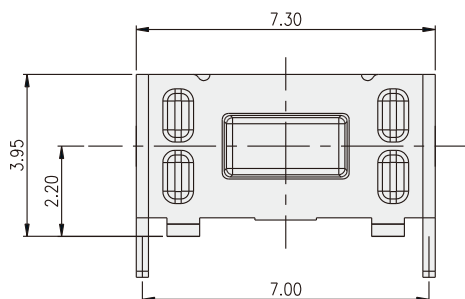


| PART NO. | H    |
|----------|------|
| TAC-31   | 0.70 |
| TAC-32   | 1.40 |
| TAC-35   | 5.00 |

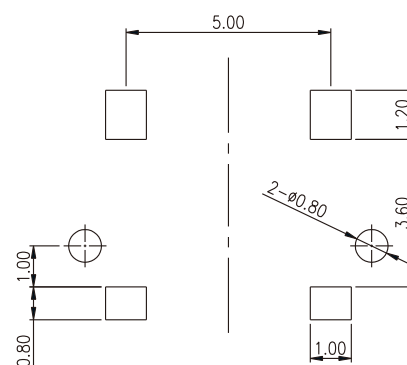


P.C.B. LAYOUT

## TA2-3

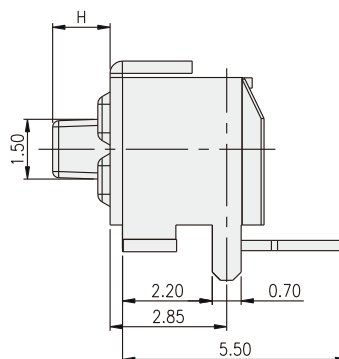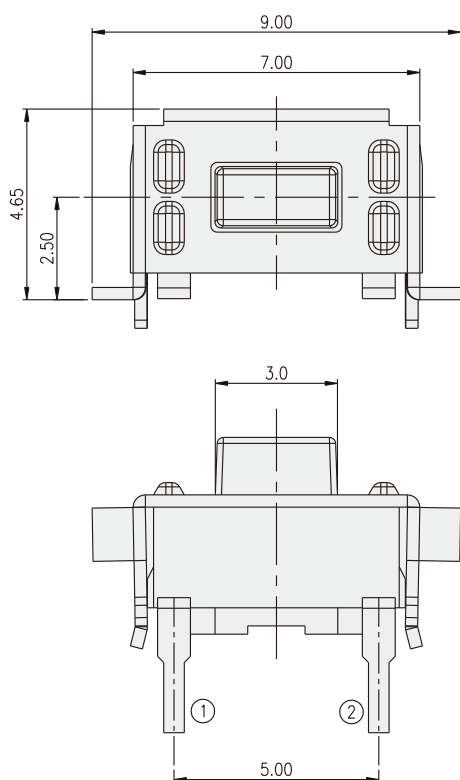



| PART NO. | H    |
|----------|------|
| TA2-31   | 0.70 |
| TA2-32   | 1.40 |
| TA2-35   | 5.00 |

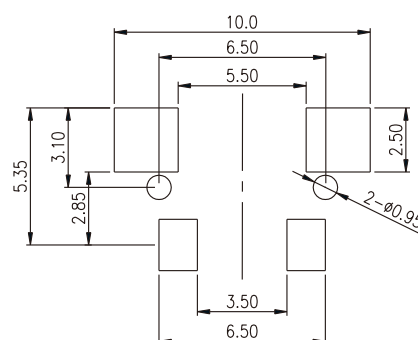


P.C.B. LAYOUT

TACT SWITCH

## TAN2-3

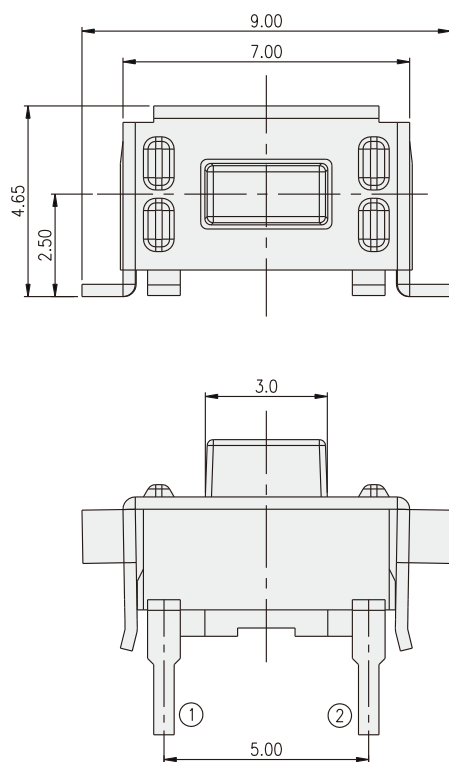


| PART NO. | H    |
|----------|------|
| TAN2-31  | 0.70 |
| TAN2-32  | 1.40 |
| TAN2-35  | 5.00 |



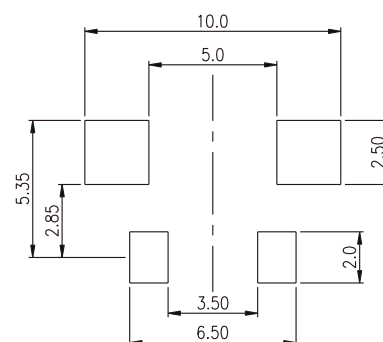


P.C.B. LAYOUT

**TACH-3**

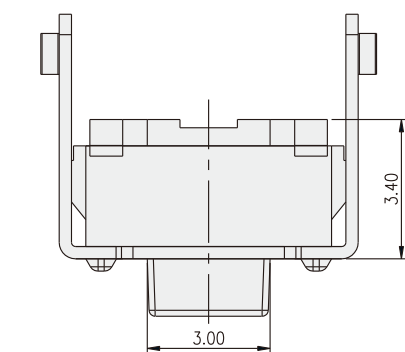

| PART NO. | H    | L    |
|----------|------|------|
| TACH-31  | 0.70 | 3.15 |
| TACH-32  | 1.40 | 3.85 |
| TACH-35  | 5.00 | 7.45 |

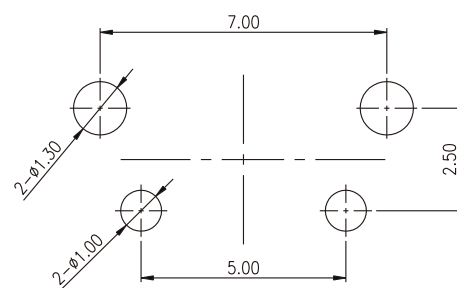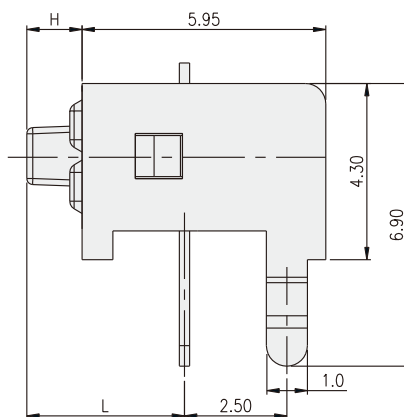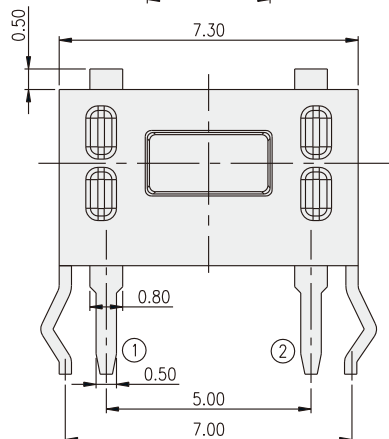

P.C.B. LAYOUT