
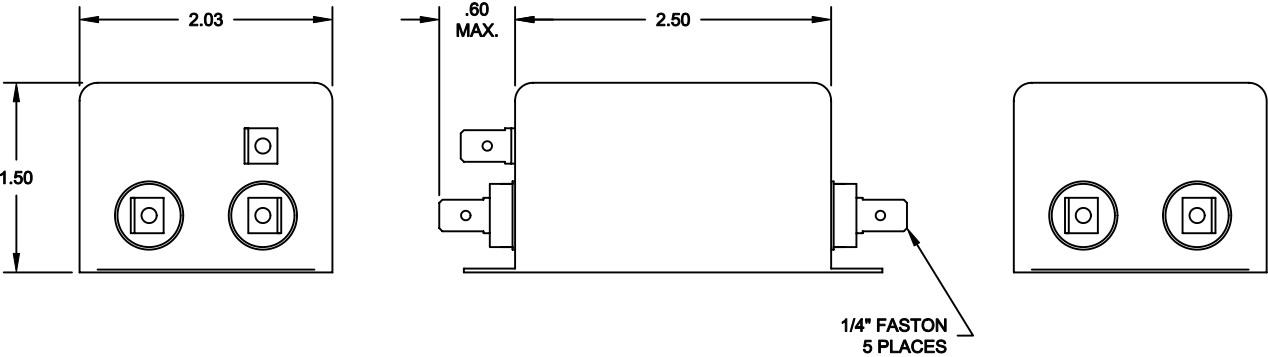


SPECIFICATIONS


- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
1A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
125VAC, 50-400Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.2KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.8mA @ 250VAC, 50Hz
- 6. WEIGHT: 0.61LB

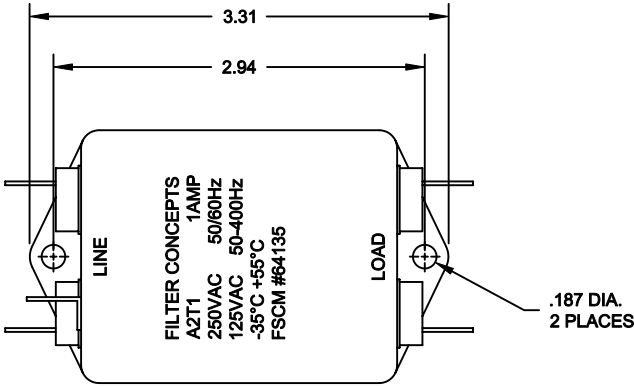

INSERTION LOSS (50 Ω TYPICAL)

	.02 MHz	.05 MHz	.15 MHz	1.5 MHz	5.0 MHz	50 MHz
L/L	20 db	35 db	60 db	65 db	65 db	60 db
L/G	35 db	60 db	65 db	65 db	65 db	60 db

SCHEMATIC



NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
MATERIAL	DRAWN	06-03-02
	CHECKED	06-05-02
FINISH		

FILTER CONCEPTS INC.		
APPLICATION DRAWING A2T1 FILTER		
SIZE B	CODE IDENT NO.	DRAWING NO. 7279
SCALE 1/1		SHEET 1 OF 1