

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0753416676](#)
Status: **Active**
Overview: [gbx_backplane_connector_system](#)
Description: 1.85mm by 1.85mm (.073 by .073") Pitch 4-Pair GbX® Backplane Connector System, Power Module, 12 Circuits, 1.27µm (50µ") Gold (Au)

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-75221-999 \(PDF\)](#)

Agency Certification

UL E29179

General

Product Family Backplane Connectors
Series [75341](#)
Application Backplane
Application Tooling Documents Tooling Manual
Comments Blade Length A 6.00mm, B 6.00mm, C 7.50mm, D 6.00mm
Component Type Power Header
Overview [gbx_backplane_connector_system](#)
Product Name GbX®
Style N/A

Physical

Circuits (Loaded) 8
Circuits (maximum) 8
Circuits Detail Rows A, B, C, & D
Color - Resin Gray
Durability (mating cycles max) 200
First Mate / Last Break Yes
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part None
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin High Temperature Thermoplastic
Number of Columns N/A
Number of Pairs 4
Number of Rows 4
Orientation Vertical
PC Tail Length (in) 0.089 In
PC Tail Length (mm) 2.28 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.073 In
Pitch - Mating Interface (mm) 1.85 mm
Pitch - Term. Interface (in) 0.102 In
Pitch - Term. Interface (mm) 2.60 mm
Plating min: Mating (µin) 50
Plating min: Mating (µm) 1.25



Series

image - Reference only

EU RoHS
RoHS Compliant by Exemption
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Halogen-Free

China RoHS

Pb

Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[75341Series](#)

Mates With
[75292 GbX® Daughtercard](#)

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Insertion Module, GbX® 4 pair 1- Up Power Module	0622022005
GbX® Single Pin Repair Tool	0622022090
GbX® Shield Removal Tool	0622022100

Plating min: Termination (μin)	30
Plating min: Termination (μm)	0.75
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	6A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	0
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification	PS-75221-999
Sales Drawing	SD-75341-001

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/13/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



ADDED NOTES 9 & 10 EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: 2007/08/30 APPR: J.B. INGHAM 2007/08/31	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
					DRAWN BY	DATE	TITLE GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY						
					CHECKED BY	DATE							
					APPROVED BY	DATE							
					ANGULAR ±---°		CUNNINGHAM 2005/02/23		molex MOLEX INCORPORATED				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE CHART		DOCUMENT NO.		SD-75341-001		SHEET NO. 1 OF 4
					SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1



2-UP ASSEMBLY PART NUMBER

7 5 3 4 2 - A B C D

- TIN/LEAD PLATED PRODUCT -
FOR EACH ROW LOCATION A, B, C, D:

0 = VOID
4 = 4.5 mm WIPE
6 = 6.0 mm WIPE
7 = 7.5 mm WIPE

- LEAD-FREE PLATED PRODUCT -
FOR EACH ROW LOCATION A, B, C, D:

0 = VOID
2 = 4.5 mm WIPE
3 = 6.0 mm WIPE
5 = 7.5 mm WIPE



SEE SHEET 1 FOR ADDITIONAL INFORMATION
CHECK WITH PRODUCT MANAGER FOR AVAILABILITY

SEE SHEET ONE EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: J. BINGHAM 2007/08/30 APPR: J. BINGHAM 2007/08/31	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm		INCH		DRAWN BY ELO	DATE 2006/04/06	GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY MOLEX INCORPORATED				
			4 PLACES	± ---	± ---	CHECKED BY ELO	DATE 2005/02/22						
			3 PLACES	± ---	± ---	APPROVED BY CUNNINGHAM 2005/02/23							
			2 PLACES	± ---	± ---								
			1 PLACE	± ---	± ---								
			ANGULAR ± ---°				MATERIAL NO.	DOCUMENT NO.	SHEET NO. 2 OF 4				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-75341-001				
							SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1



SEE NOTE 4.



14.80

3-UP ASSEMBLY PART NUMBER

7 5 3 4 3 - A B C D

- TIN/LEAD PLATED PRODUCT -

FOR EACH ROW LOCATION A, B, C, D:

0 = VOID

4 = 4.5 mm WIPE

6 = 6.0 mm WIPE

7 = 7.5 mm WIPE

- LEAD-FREE PLATED PRODUCT -


FOR EACH ROW LOCATION A, B, C, D:

0 = VOID

2 = 4.5 mm WIPE

3 = 6.0 mm WIPE

5 = 7.5 mm WIPE

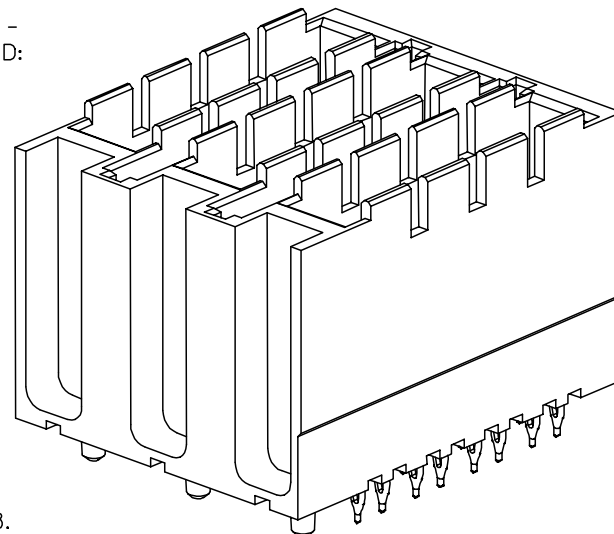

SEE SHEET 1 FOR ADDITIONAL INFORMATION
CHECK WITH PRODUCT MANAGER FOR AVAILABILITY

SEE SHEET ONE EC NO: UCP2008-0426 DRAWN: C STEWART 2007/08/29 CHKD: 2007/08/30 APPR: J B INGHAM 2007/08/31	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY ELO	DATE 2006/04/06	GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± ---	ELO	2005/02/22					
			2 PLACES	± ---	± ---	APPROVED BY	DATE	MOLEX INCORPORATED SD-75341-001				
			1 PLACE	± ---	± ---	CUNNINGHAM	2005/02/23					
			ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.					SHEET NO. 3 OF 4
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART						
						SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10 9 8 7 6 5 4 3 2 1

F
E
D
C
B
A

SEE NOTE 5.

6.0 mm WIPE
7.5 mm WIPE

4.5 mm WIPE

0.76
DC BOARD EDGE TO
CENTERLINE OF BP TAIL



HOLE PATTERN FOR 1-UP ASSEMBLY

- 1.) ADD 7.40 FROM CENTERLINES OF PEGS FOR MULTIPLE UP ASSEMBLIES.
- 2.) ADD 5.55 FROM CENTERLINE TO CENTERLINE OF PEG FOR INDIVIDUAL POWER MODULES STACKED NEXT TO EACH OTHER.



ADDED $\varnothing 0.74 \pm 0.06$ EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: 2007/08/30 APPR: J. BINGHAM 2007/08/31	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY ELO	DATE 2006/04/06	TITLE GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY			
			4 PLACES	± ---	± ---	CHECKED BY ELO	DATE 2005/02/22				
			3 PLACES	± ---	± ---	APPROVED BY CUNNINGHAM	DATE 2005/02/23	MOLEX INCORPORATED			
			2 PLACES	± ---	± ---	MATERIAL NO.	DOCUMENT NO.				
			1 PLACE	± ---	± ---	SEE PREVIOUS					
REV C			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1