



|              |                 |                                 |                      |   |   |   |   |   |   |   |   |   |
|--------------|-----------------|---------------------------------|----------------------|---|---|---|---|---|---|---|---|---|
| 13           | 12              | 11                              | 10                   | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| MATERIAL NO. | ENGINEERING NO. | LENGTH                          | WIRE CUT LENGTH      |   |   |   |   |   |   |   |   |   |
| 849070007    | 84907-0007      | 12.00 +1.75-0 ( 304.8 +44.5-0 ) | 13.25 IN ( 336.6mm ) |   |   |   |   |   |   |   |   |   |

MALE FACE VIEW


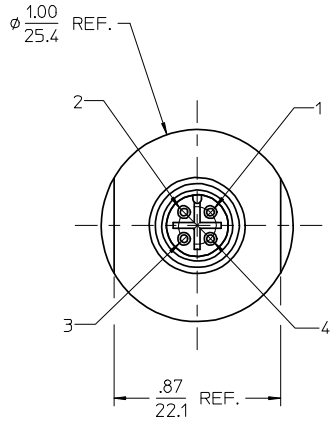


|   |       |
|---|-------|
| 1 | BROWN |
| 2 | WHITE |
| 3 | BLUE  |
| 4 | BLACK |

WIRING DIAGRAM

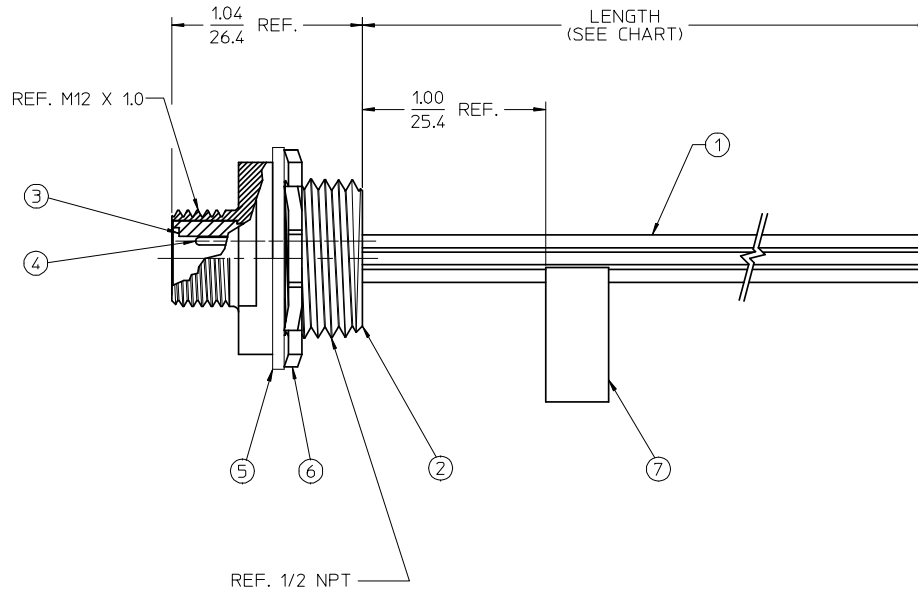

REAR VIEW



REF. PANEL KNOCK-OUT

NOTES:

1. MATERIALS: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 250V  
CURRENT RATING, 4 AMPS
4. LABEL IS MARKED WITH PART NO., DATE CODE, VOLTAGE AND CURRENT RATING
5. LABEL IS ATTACHED TO BLUE WIRE (CIR. 3)
6. ASSEMBLY IS ROHS COMPLIANT BY EXEMPTION (\*).

|      |     |                         |                 |              |
|------|-----|-------------------------|-----------------|--------------|
| 7    | 1   | LABEL                   | VINYL           | BLACK/YELLOW |
| 6    | 1   | LOCKNUT, PANEL, 1/2 NPT | STEEL           | ZINC PLATED  |
| 5    | 1   | GASKET                  | NEOPRENE        | BLACK        |
| 4    | 4   | CONTACT PIN             | BRASS *         | TIN PLATED   |
| 3    | 1   | INSULATOR, 4/C, DC KEY  | NYLON           | BLACK        |
| 2    | 1   | RECEPTACLE SHELL        | STAINLESS STEEL | PASSIVATED   |
| 1    | 4   | WIRE, 22 AWG            | PVC INSULATION  | AS NOTED     |
| ITEM | QTY | DESCRIPTION             | MATERIAL        | FINISH       |

RELEASED FOR BUILD  
EC NO: WNA2009-0005  
DRAWN BY: DRWINSTONE 2008/07/09  
CHKD: JJOZWIK  
APPR: JFMURPHY 2008/08/18

QUALITY SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

|          | mm     | INCH    |
|----------|--------|---------|
| 4 PLACES | ± .005 | ± .0005 |
| 3 PLACES | ± .005 | ± .0005 |
| 2 PLACES | ± .005 | ± .001  |
| 1 PLACE  | ± 0.3  | ± .012  |

ANGULAR ± .005°

DRAFT WHERE APPLICABLE  
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE  
IN/MM

DRAWN BY: R. STONE  
DATE: 2008/07/02

CHECKED BY: K. JOZWIK  
DATE: 2008/07/07

APPROVED BY: J. MURPHY  
DATE: 2008/07/10

MATERIAL NO. SEE CHART

SIZE: C

SCALE: 2:1  
DESIGN UNITS: INCH  
THIRD ANGLE PROJECTION

TITLE: MIC-C RECEPTACLE, 4/C MALE, DC KEY, 22 AWG 1/2 NPT, SS

MOLEX INCORPORATED

DOCUMENT NO. SD-84907-012

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION