

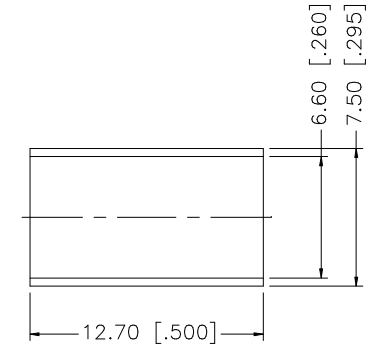
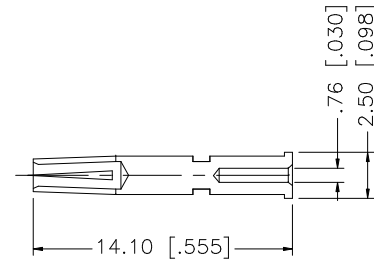


RECOMMENDED
CABLE STRIPPING DIM'S

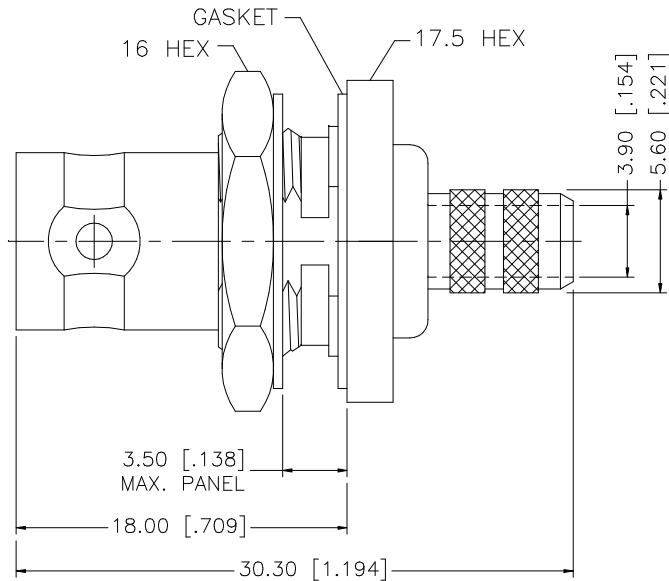

RECOMMENDED
MOUNTING HOLE

REV.	DATE	DESCRIPTION
NC	04/17/00	INITIAL RELEASE
A	11/02/05	UPDATE DRAWING FORMAT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	11/02/05						
7	FERRULE	COPPER	NICKEL	1		CHECKED			PART DESCRIPTION BNC BULKHEAD CRIMP JACK (FOR RG-59/U CABLE)					
6	HEX NUT	BRASS	NICKEL	1		ISSUED								
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 112205					
4	GASKET	RUBBER	RED	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE		DWG. NO. 112205.DWG REV. A SIZE A SCALE NA						
2	INSULATOR	TEFLON	NATURAL	1		C:/112/112205.DWG								
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										