
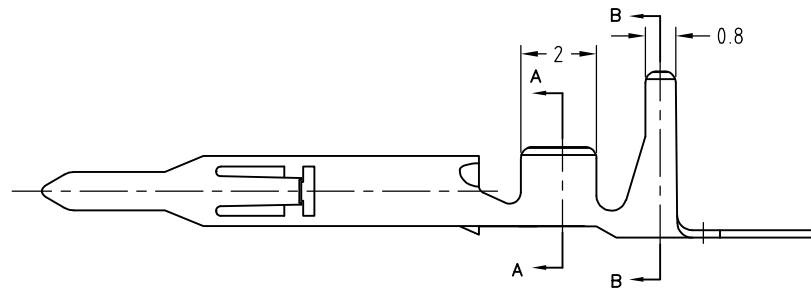


LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
			K2	REVISED PER ECR-16-000249		18JAN16	SC	DZ


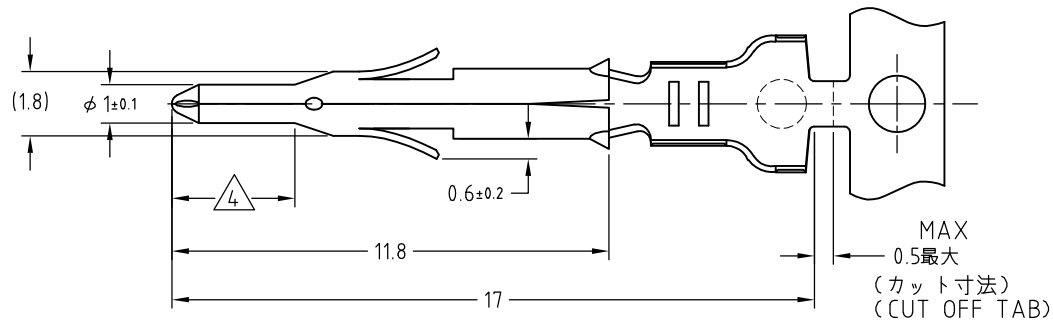


注記

1. 使用ハウジングはキャップ及びプラグ
- △ 2本圧着の被覆外径は3.4mm最大
3. 取扱説明書：IS-105J
- △ 全面ニッケルメッキの上に0.76μm最小の金メッキを施す。

NOTES


1. APPLICABLE HOUSING : CAP AND PLUG.
- △ APPLICABLE INSULATION DIA METER FOR TWO-WIRE CRIMP IS 3.4mm MAX.
3. INSTRUCTION SHEET : IS-105J
- △ SELECTIVE GOLD PLATED AREA 0.76μm MIN THK OVER Ni PLATED.



170361,170362 170365,170366	170364-4	PRE TIN PHOS BRO 0.2t 錫めっき済磷青銅 0.2t	170360-4
	170364-3	BRASS 0.2t 黄銅 0.2t	170360-3
	170364-1	PRE TIN BRASS 0.2t 錫めっき済黄銅 0.2t	170360-1
かん合相手型番 MATING CON'T	ばら状態型番 LP.NO	材料 MATERIAL	型番 P/N

WIRE RANGE
絶合電線断面積AWG#22~#18
0.30~0.80mm²INSULATION DIA
被覆外径

△ 1.5~2.4mm

DIMENSIONS: 単位： 耗 mm		DWN J.SATO 18JAN2008	MATERIAL 材料 SEE TABLE		FINISH 仕上	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± ±0.3 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		CHK S.MANABE 18JAN2008	 TE Connectivity			
		APVD S.MANABE 18JAN2008				
		PRODUCT SPEC 製品規格 108-5138	NAME 名称 MINI UNIVERSAL MATE-N-LOK PIN CONTACT			
		APPLICATION SPEC 取付適用規格 114-5050				
		WEIGHT	SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-170360	RESTRICTED TO —
		CUSTOMER DRAWING				SCALE 尺度 4:1

