



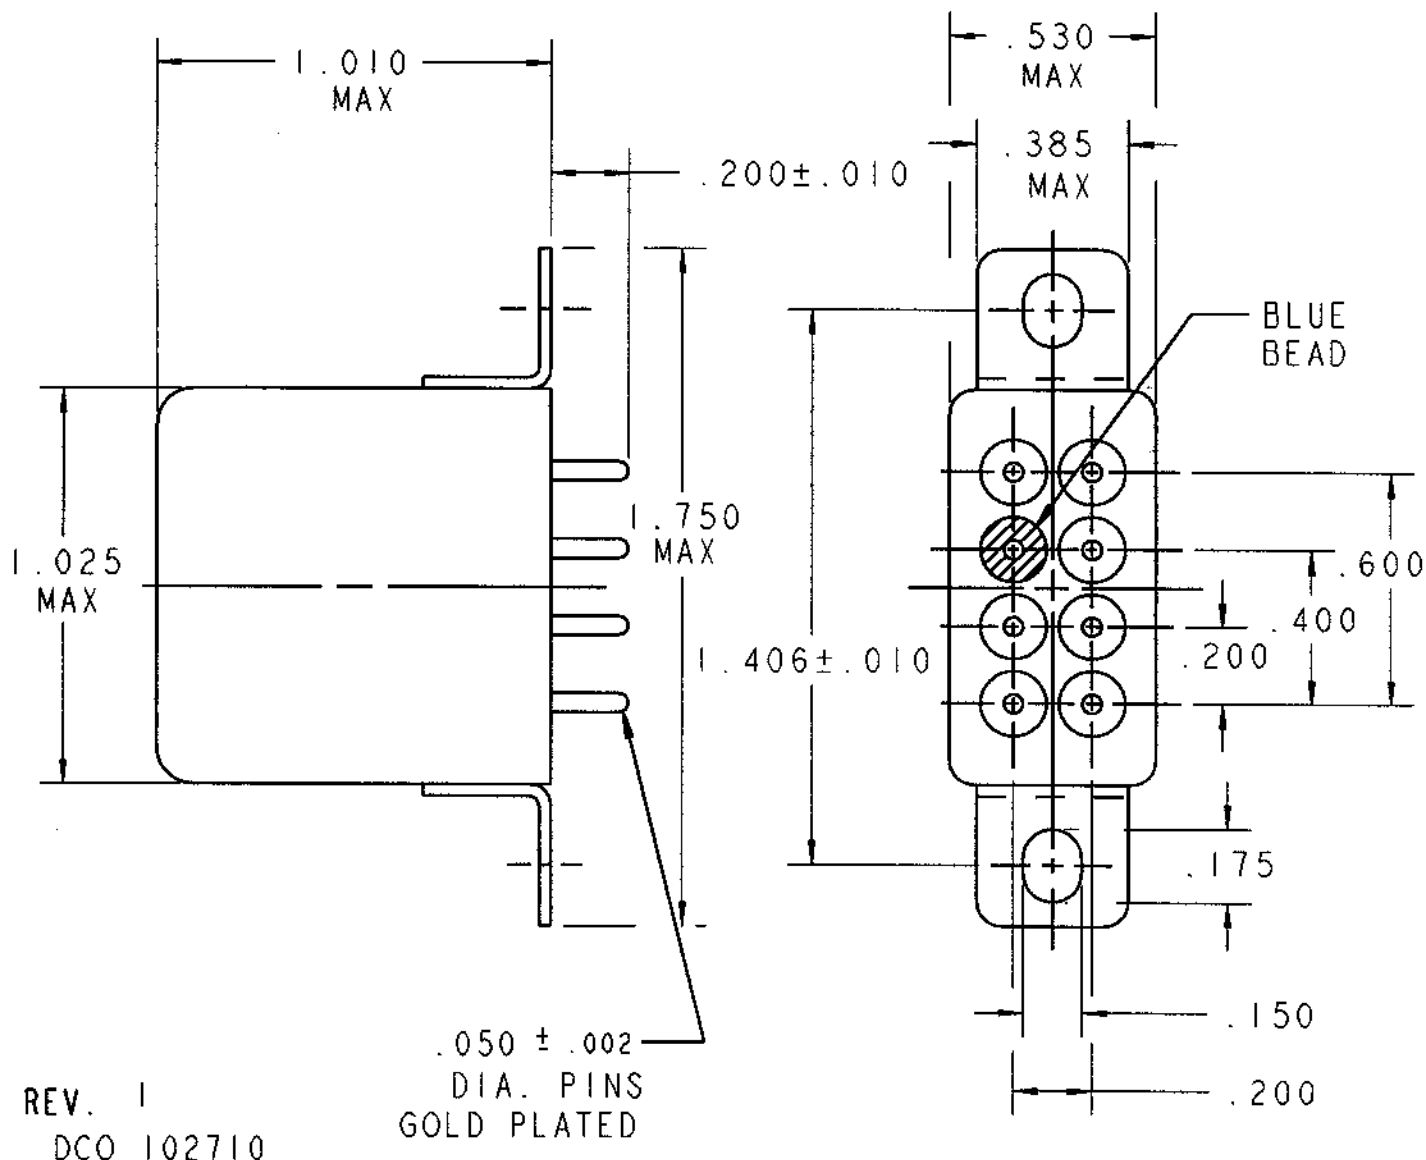

COIL: @ 25°C  
 RESISTANCE 58-83 OHMS  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.5 VDC  
 MUST RELEASE 3.6 VDC MAX, 0.8 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C  
 NOTES: OPERATE & RELEASE 15 MS MAX.  
 OPERATE BOUNCE 5 MS MAX.  
 RELEASE BOUNCE 5 MS MAX.

# CUSTOMER DATA SHEET

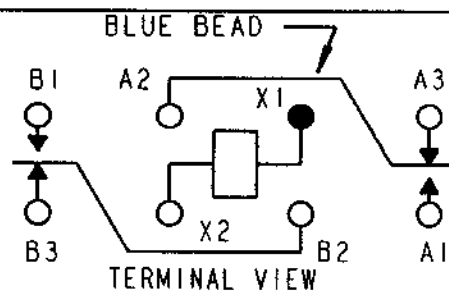

CONTACT RATING: 10 AMPS 28 VDC  
 5 AMPS 115 VAC/400 H<sub>2</sub> RESISTIVE  
 50,000 OPERATIONS

DR. RB 3/9/98 CK. TLG 8-17-01

**CII Technologies**  
 advanced control electronic solutions

CUST. QPL  
 CUST. NO. M5757/23-009 REV.

"07" RELAY

B07D934BB2-0119