



DESCRIPTION: M8 MALE - CABLE MOUNT - SOLDER CUP - 5 POS.

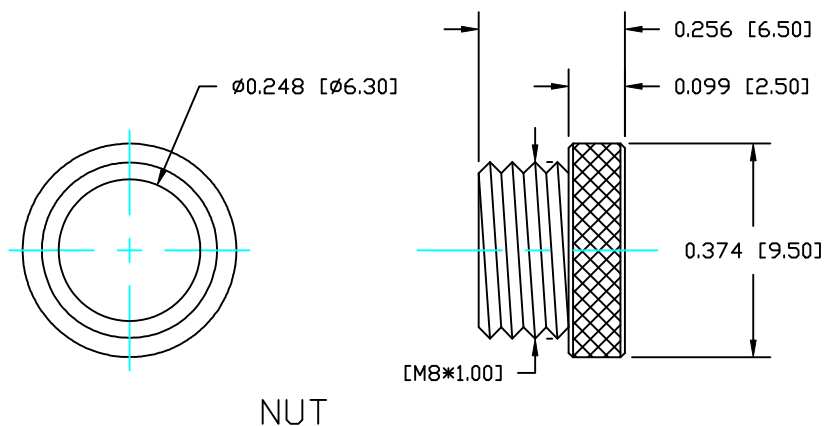

NUT

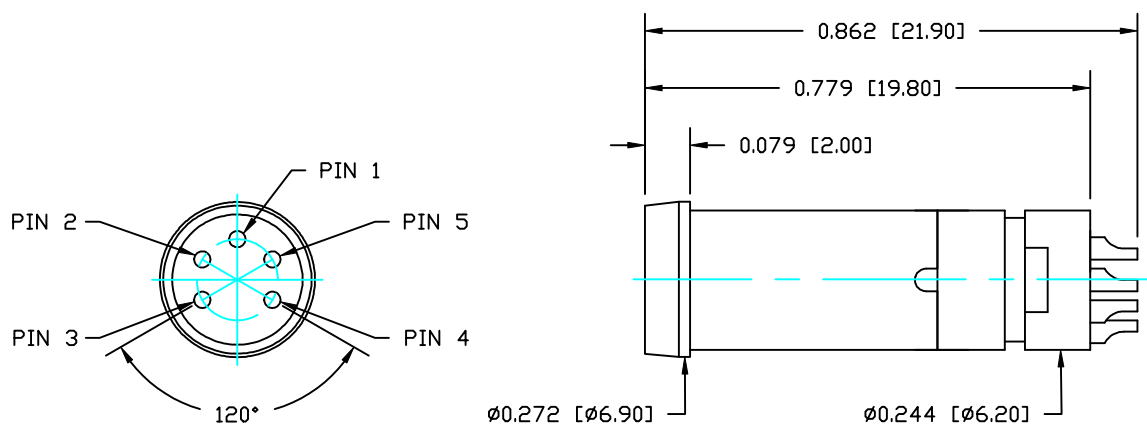

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: BRASS
NUT: BRASS
SHELL: BRASS

FINISH


CONTACT: GOLD FLASH (0.8-1.0)μm
OVER 50μm NICKEL
SHELL: NICKEL PLATED
NUT: NICKEL PLATED

ELECTRICAL

RATED CURRENT: 3A
RATED VOLTAGE: 125V
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 24-28 AWG

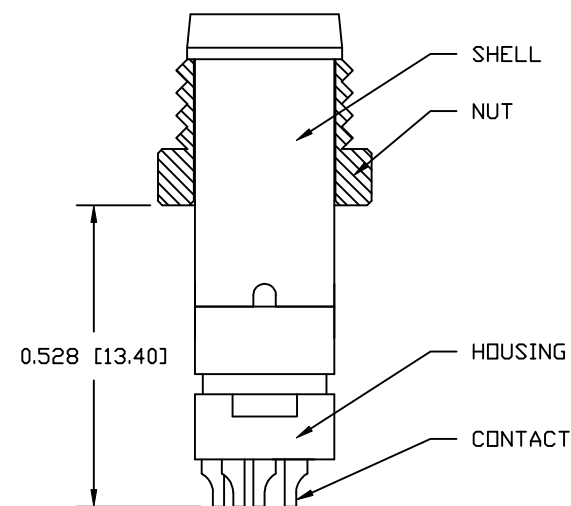

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
08-14-14

CHECKED:

DATE:

NorComp

SCALE:
N.T.S.

SHEET 1 OF 1

REV 1

DWG NO.

854-005-103RLS1