

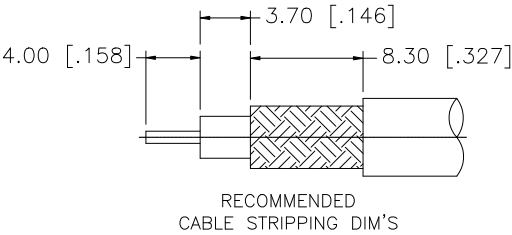
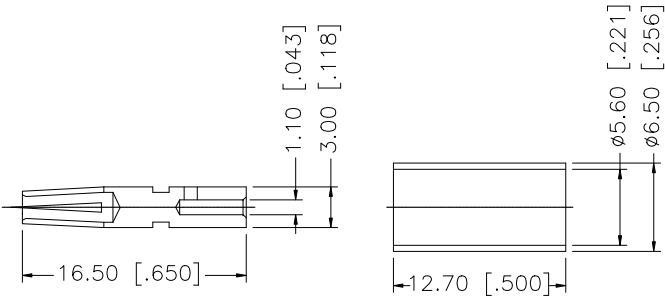


REV.	DATE	DESCRIPTION
A	02/09/05	MODIFY PLATING SPEC/ UPDATE DRAWING FORMAT
B	07/12/07	REVISE CRIMP NOTES

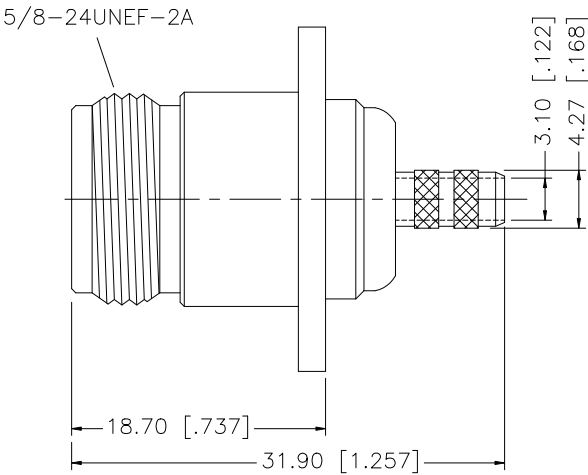

RECOMMENDED
CABLE STRIPPING DIM'S

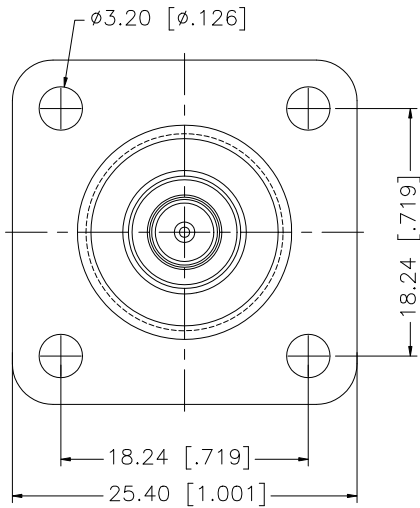

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	07/12/07								
7						CHECKED				PART DESCRIPTION N PANEL CRIMP JACK (FOR RG-55/U, 143A/U, 223/U, 400/U)						
6						ISSUED										
5						SHEET	1 OF 1			PART NO. 172175						
4	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	NEXCOTE	1												
DESCRIPTION				MATERIAL		FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/172/172175.DWG		DWG. NO. 172175.DWG		REV. B	SIZE A	SCALE NA