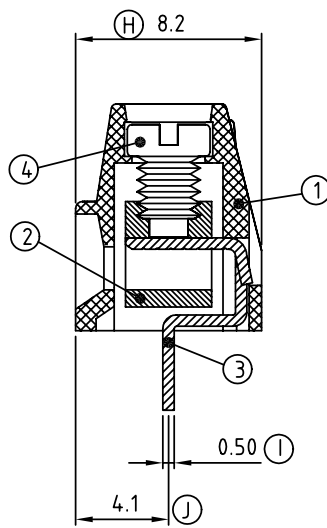
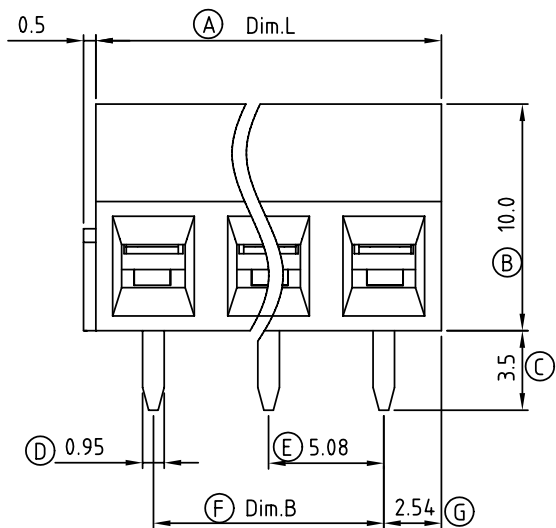
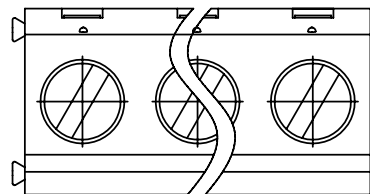


P.C.B LAYOUT

N=Number of contacts
Dim.L=Nx5.08
Dim.B=(N-1)x5.08

Poles Dim.	2~8P	9~15P	16~24P
Dim.B	±0.20	±0.25	±0.30
Dim.L	±0.20	±0.30	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	01/18'07	Soldering temperature changed from 245° to 250°	Tason
△	01/18'07	Part NO is Changed	Tason
△	01/08'09	Temperature changed from -30°C~+105°C to -40°C~+115°C	Kind
△	01/08'09	Terminal screw changed from M2.5 to M3.0	Kind
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item 1 Terminal housing : Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

Electrical

UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-26
- Stranded wire(AWG): 16-26
- Torque(Lb-In): 3.5
- △ ● Screw: M3.0
- Wire strip length: 6-7mm
- Withstanding Voltage: 16KV
- △ ● Operating temperature: -40°C to +115°C
- △ ● Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

△ YC xx 21 x 0 xxxx G

02 2 CONTACTS
03 3 CONTACTS
... ..
24 24 CONTACTS

0 Black
5 Green
6 Blue
8 Grey

0000:"@Logo (Standard)
000A:"ANYTEK"Logo
Any special item by
customer request,
please contact sales
department.

Pb < 40,000ppm
(RoHS)

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		YC 5.08 Series 2P-24P			DWG NO.		8YC0001	
PART NO.		YCxx21x0xxxxG			CUST NO.			
APPROVED		CHECKED	DESIGNED	DRAWN			Tolerance	
			Kind	Kind			X.	±0.50
			2009.01.08	2009.01.08			X.X	±0.30
							X.XX	±0.10
							X°	±1°
							UNIT: mm	
							SCALE: NONE	
							SHEET: 01/01	
							REV.: G	