

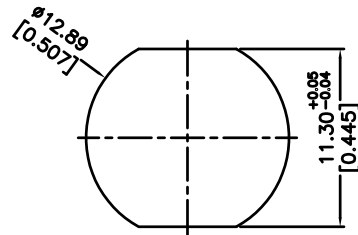
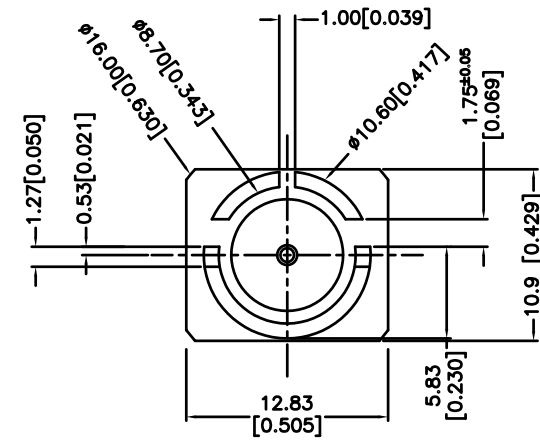
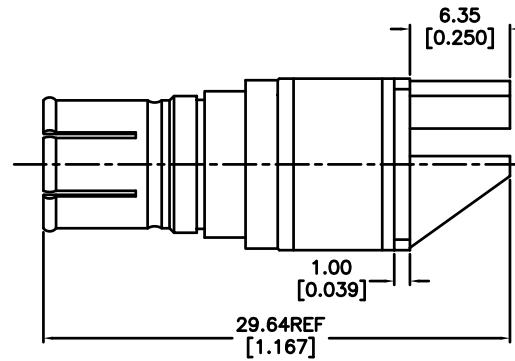




REV.	DATE	DESCRIPTION
A	11/04/10	RELEASE TO MFG.



RECOMMENDED MOUNTING
HOLE DIMENSIONS

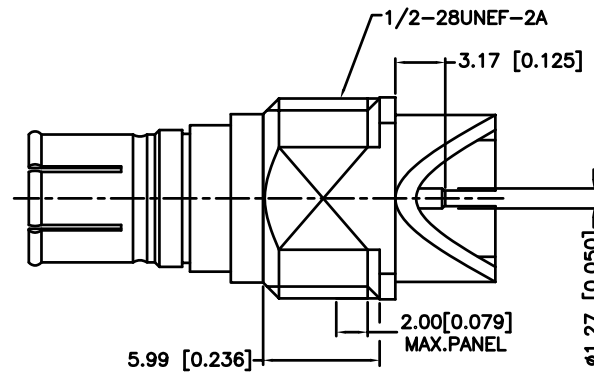

RECOMMENDED
PCB LAYOUT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS DATE	AMPHENOL CONNEX			
7	HEX NUT	BRASS	NICKEL	1		DRAWN CLEMENT 11/04/10				
6	LOCK WASHER	BRASS	NICKEL	1		CHECKED	PART DESCRIPTION BNC END LAUNCH RECEPTACLE PLUG PUSH ON,75 OHMS			
5	INSULATOR	TEFLON	NATURAL	1		ISSUED				
4	HOUSING	BRASS	NICKEL	1		SHEET 1 OF 1				
3	CONTACT PIN	BRASS	GOLD	1		PART NO. 112770-10				
2	INSULATOR	TEFLON	NATURAL	1		DWG. NO. 112770-10.DWG REV. A SIZE A SCALE NA				
1	BODY	BRASS	NICKEL	1						
NO	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:\112\112770-10.DWG				

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"