
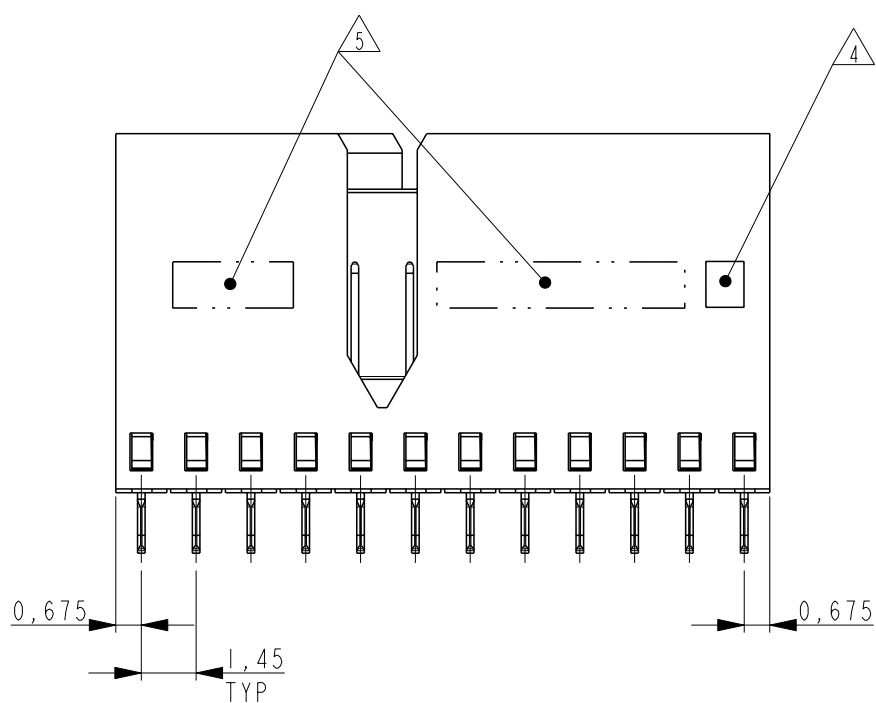
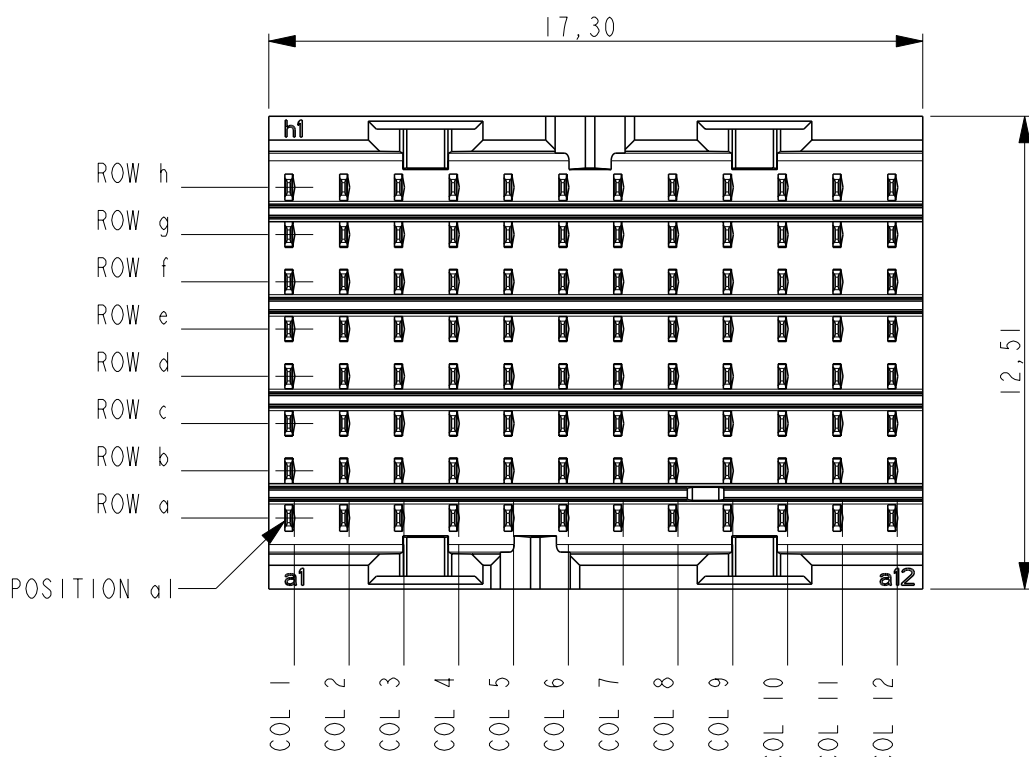


D

C

B

A

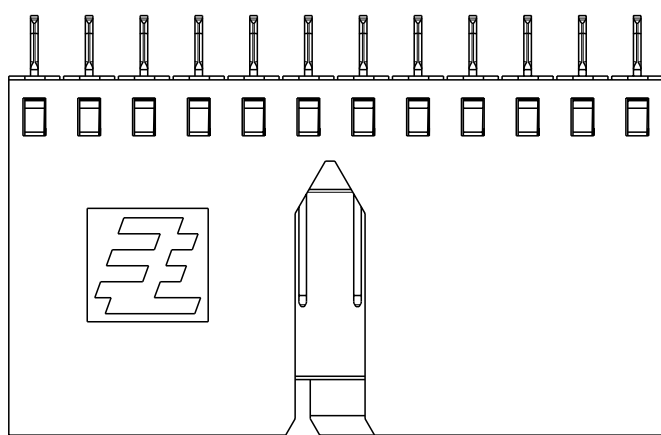





NOTES:

- △ PLATING: 0,5µm MIN. TIN OVER NICKEL.
- △ PLATING:

PARTNUMBER	PERFORMANCE LEVEL
1551099-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
1551099-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD I

- 3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.
- △ BLACK SQUARE MARKING FOR LEVEL 4 PIN AT POSITION a12 AS INDICATED.
- △ CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.
- 6 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

PRODUCT HAS NOT COMPLETED
QUALIFICATION TESTING

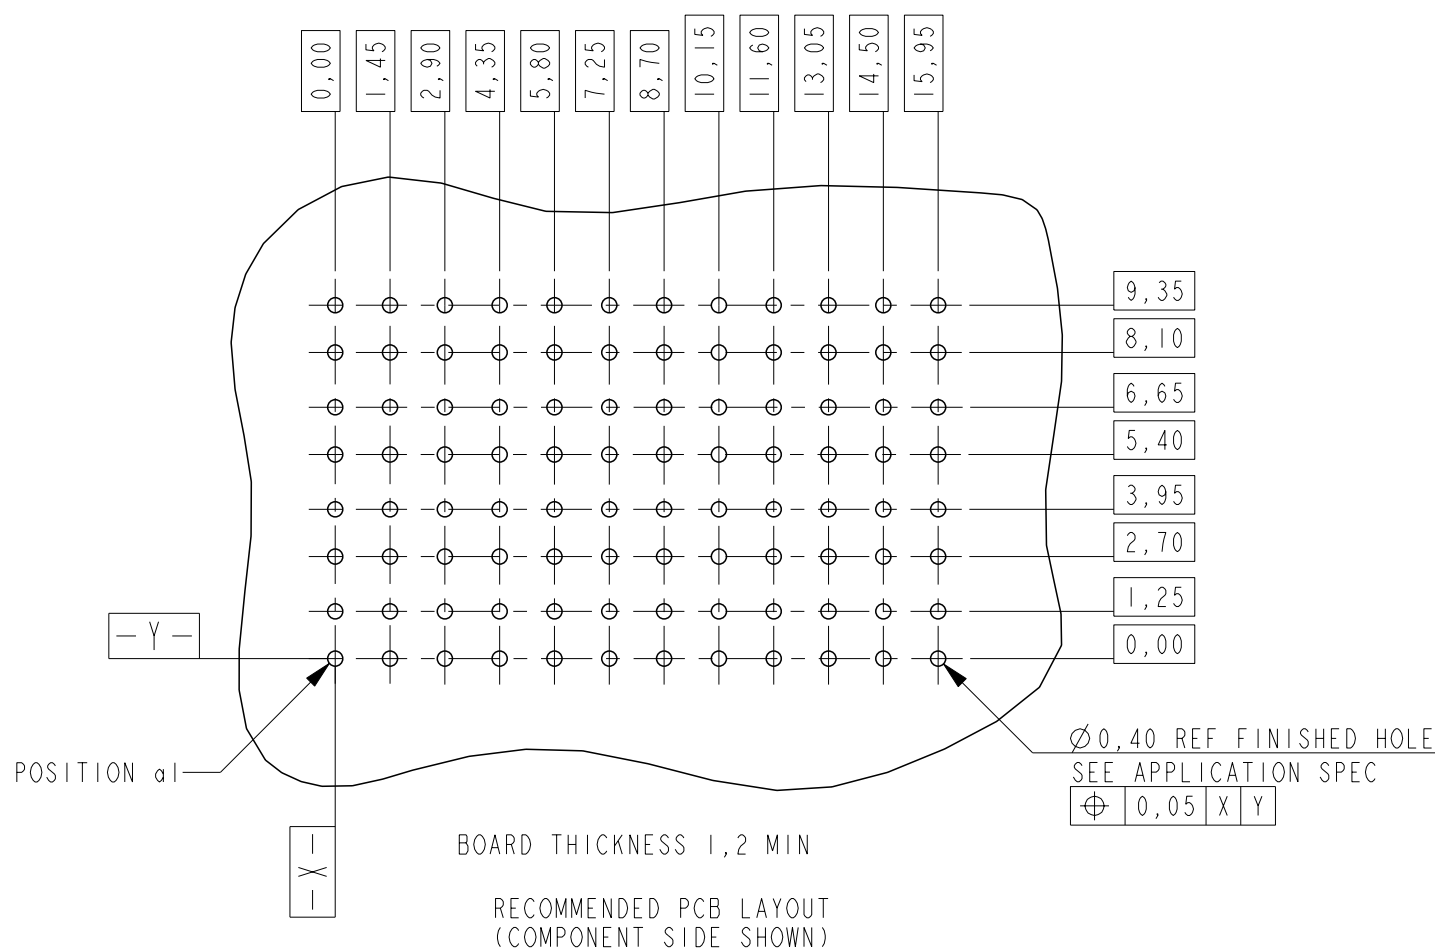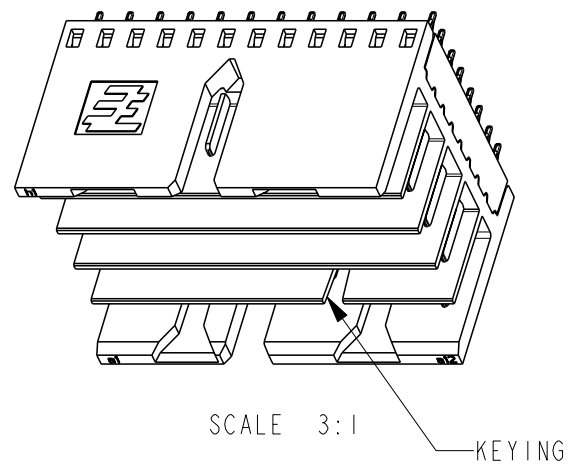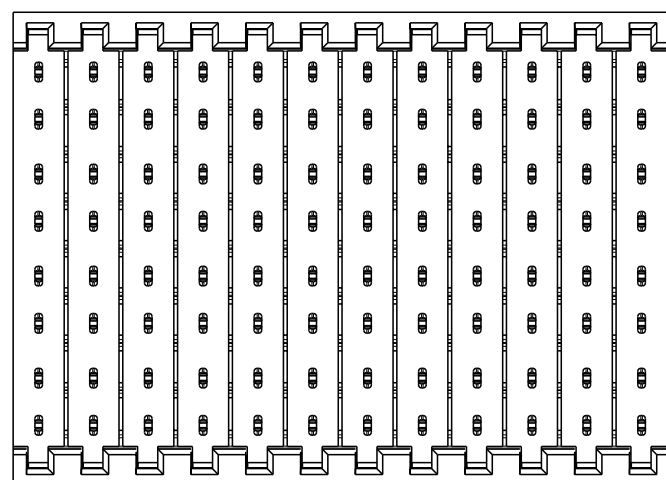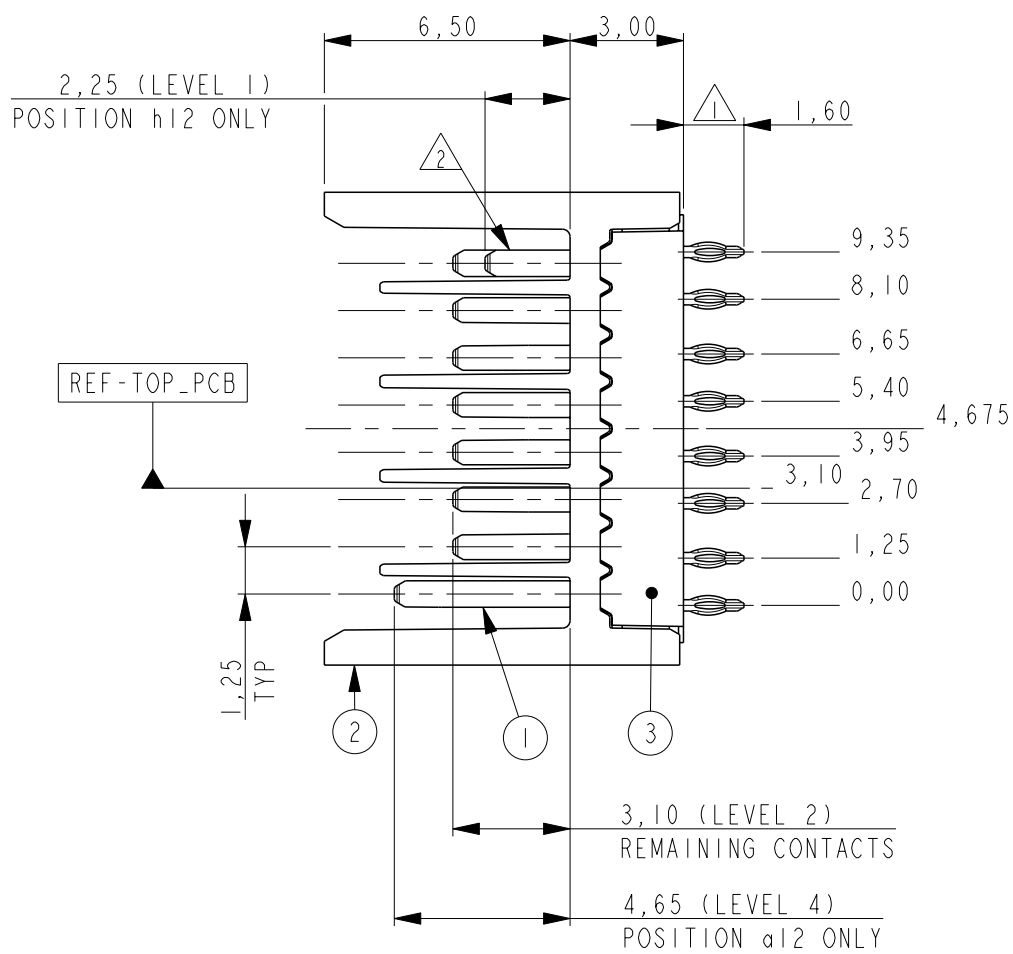

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Vathsa	09-Feb-2009
DIMENSIONS:		CHK	R. Annokkee	09-Feb-2009
mm		APVD	Mark Westen	09-Feb-2009
		PRODUCT SPEC		
		APPLICATION SPEC		
MATERIAL		114-19106		
		WEIGHT		
		CUSTOMER DRAWING		
		SCALE		
		SHEET		
		REV		

3	OVERMOLD	LCP 30% GF NATURAL
2	HOUSING	LCP 30% GF NATURAL
1	CONTACT	COPPER ALLOY
ITEM NO.	DESCRIPTION	MATERIAL

TE TE Connectivity

NAME
MALE CONNECTOR
Z-PACK Slim UHD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1551099	-