


S

WAS P-73-6103

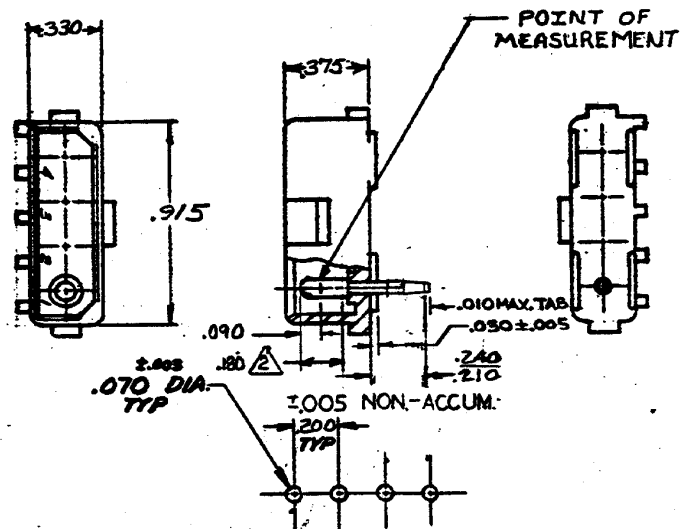

RECOMMENDED LAYOUT FOR
.125 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY

SPEC. NO. 109-11-3

CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN
.000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN
PLATED ON SOLDER TAIL END.

OBSOLETE

350544-2	NYLON - NATURAL	COPPER ALLOY - GOLD	
350544-1	NYLON - NATURAL	COPPER ALLOY PRE-TIN	
ASSEMBLY NO.		HSG. MATL & COLOR	PIN MATL & FINISH
DR	5-30-73	MATERIAL AND FINISH	
CHK	9. Eshman	SEE TABLE	
DATE	4/14/73	TE Connectivity	
DE	J. Humble 9/14/73	CLASS	
APP	J. Humble 9/14/73	WIRE - RANGE - INSULATION	
		TOLERANCE EXCEPT AS NOTED	
		SCALE	
		LSC	
		CM	
		B	
		350544	
		4 CIRCUIT MATE-N-LOK	
		P.C. BOARD HEADER	

L2	REVISED PER ECR-15-006702	NK	PQ	09012015
2.75	REVISION RECORD	2.25	CHK	DATE

ALL DIMENSIONS IN INCHES. DO NOT SCALE PRINT.