

CMHSH5-2L

**SURFACE MOUNT SILICON
LOW FORWARD VOLTAGE
SCHOTTKY RECTIFIER
500mA, 20 VOLT**


www.centrasemi.com
DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMHSH5-2L type is a silicon Schottky rectifier, epoxy molded in a surface mount package, designed for high current applications requiring a low forward voltage drop.

**LOW
V_F**



SOD-123 CASE

MARKING CODE: C2L

MAXIMUM RATINGS: (T_A=25°C)

Peak Repetitive Reverse Voltage	V _{RRM}	20	V
Peak Working Reverse Voltage	V _{RWM}	20	V
DC Blocking Voltage	V _R	20	V
Average Rectified Current	I _O	500	mA
Peak Forward Surge Current (@ rated load, halfwave, single phase, 60Hz)	I _{FSM}	5.5	A
Power Dissipation	P _D	400	mW
Operating Junction Temperature	T _J	-65 to +125	°C
Storage Temperature	T _{stg}	-65 to +150	°C
Thermal Resistance	θ _{JL}	150	°C/W
Thermal Resistance	θ _{JA}	250	°C/W

SYMBOL**UNITS****ELECTRICAL CHARACTERISTICS:** (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _R	V _R =10V		43	75	μA
I _R	V _R =10V, T _A =100°C		4.77	5.0	mA
I _R	V _R =20V		70.7	250	μA
I _R	V _R =20V, T _A =100°C		7.16	8.0	mA
BV _R	I _R =10μA	20			V
V _F	I _F =100mA		250	300	mV
V _F	I _F =100mA, T _A =100°C		158	220	mV
V _F	I _F =500mA		355	385	mV
V _F	I _F =500mA, T _A =100°C		301	330	mV
C _J	V _R =0, f=1.0MHz		94		pF
C _J	V _R =4.0V, f=1.0MHz		31		pF


R6 (21-October 2015)

CMHSH5-2L

SURFACE MOUNT SILICON
LOW FORWARD VOLTAGE
SCHOTTKY RECTIFIER
500mA, 20 VOLT



SOD-123 CASE - MECHANICAL OUTLINE

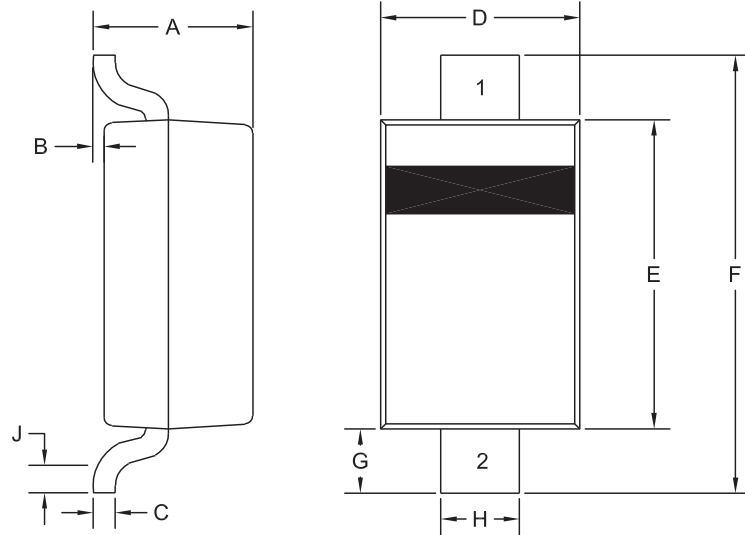

R5

LEAD CODE

- 1) Cathode
- 2) Anode

MARKING CODE: C2L

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.053	0.95	1.35
B	0.000	0.005	0.00	0.12
C	-	0.008	-	0.20
D	0.055	0.071	1.40	1.80
E	0.098	0.110	2.50	2.80
F	0.142	0.154	3.60	3.90
G	0.016	-	0.40	-
H	0.020	0.028	0.50	0.70
J	0.010	-	0.25	-

SOD-123 (REV:R5)





R6 (21-October 2015)

CMHSH5-2L

SURFACE MOUNT SILICON
LOW FORWARD VOLTAGE
SCHOTTKY RECTIFIER
500mA, 20 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

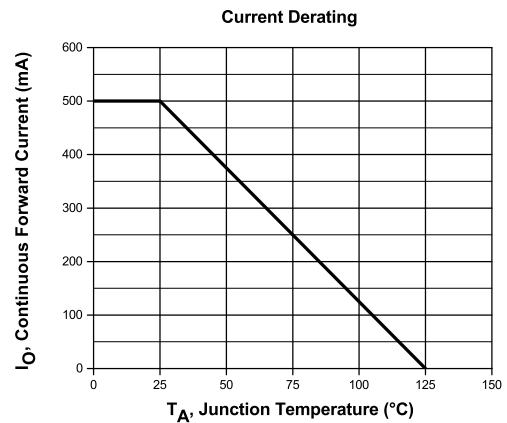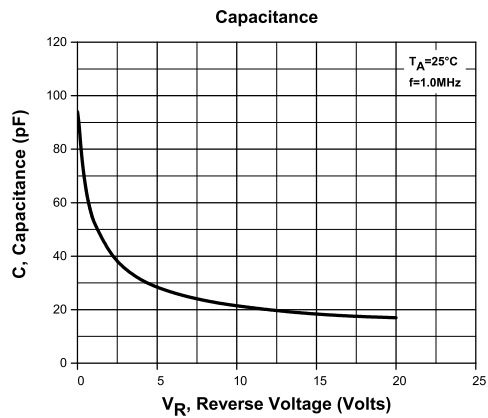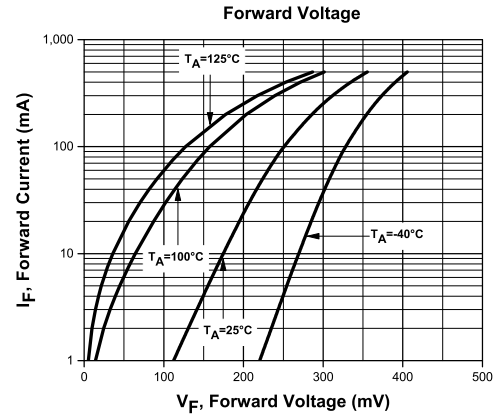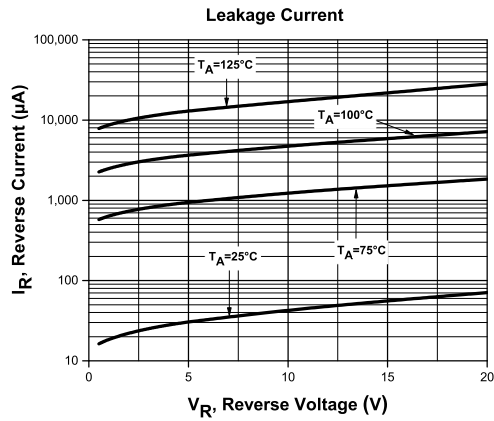


R6 (21-October 2015)

CMHSH5-2L

SURFACE MOUNT SILICON
LOW FORWARD VOLTAGE
SCHOTTKY RECTIFIER
500mA, 20 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

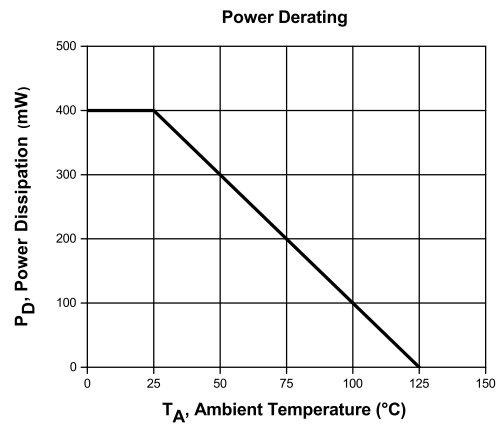

R6 (21-October 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:

www.centrasemi.com/wwreps

Worldwide Distributors:

www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms