

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	11MAY2015	DL	CW

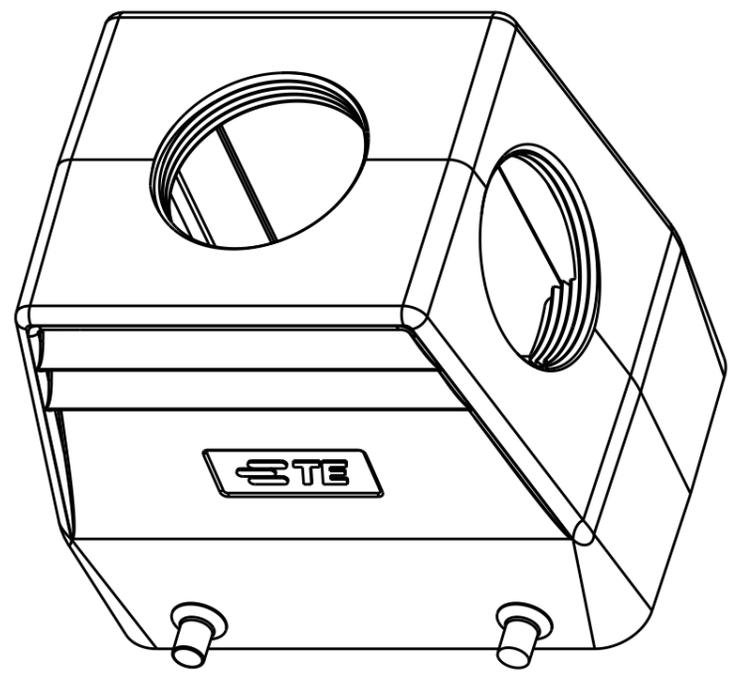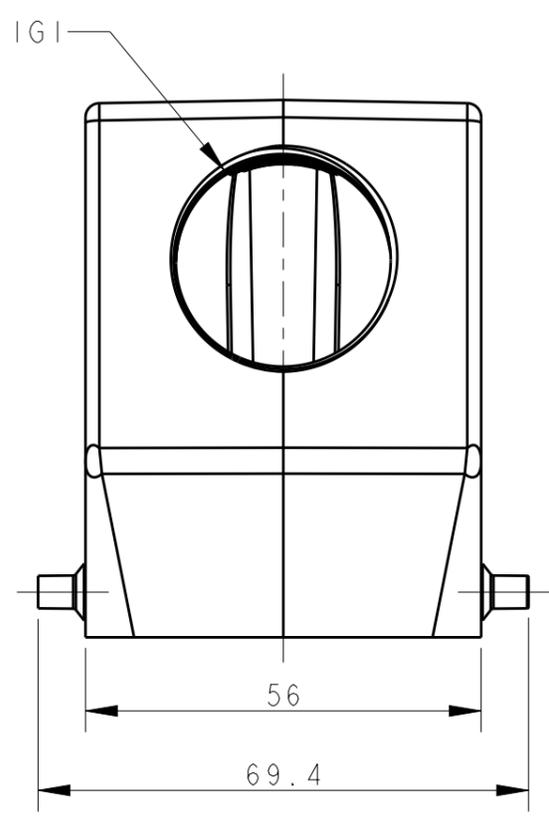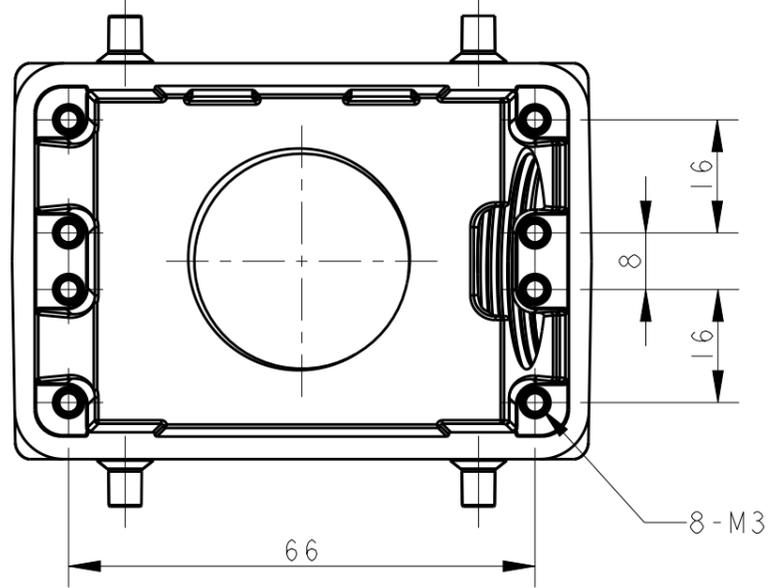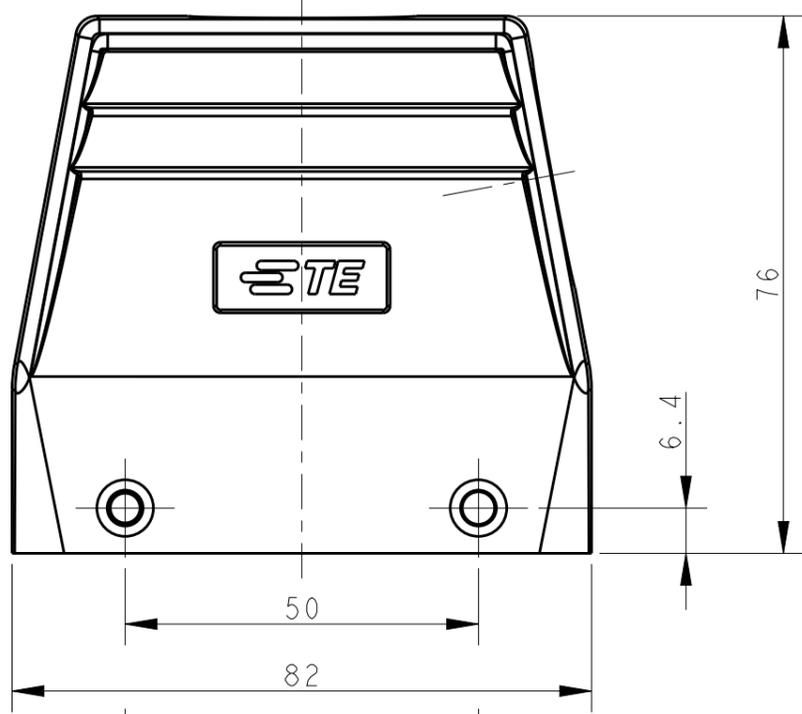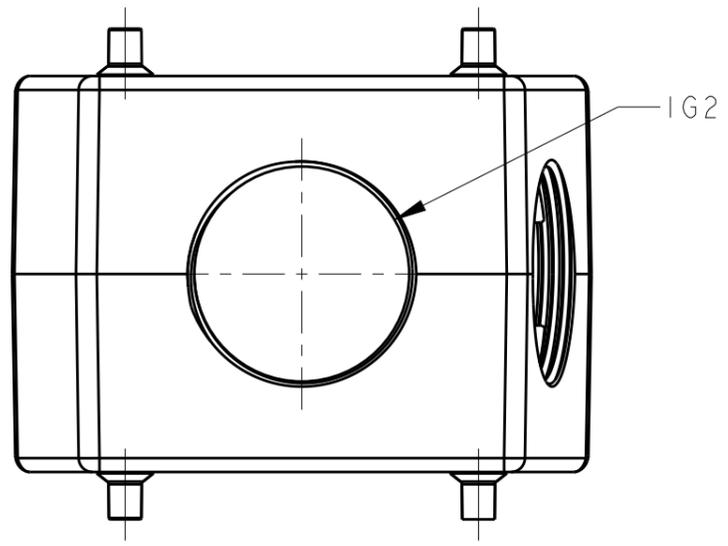

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE TREATMENT: POWDER-COATED, GRAY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 主体材料: 铝合金
 表面处理: 粉末喷涂, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

T1209320232-000	H32A-TS/G-2M32	M32	M32
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11MAY2015 DAVID LI	 TE Connectivity	
DIMENSIONS: mm		CHK 11MAY2015 CHRIS WANG		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11MAY2015 XU XIANG	PRODUCT SPEC 108-137010	
0 PLC ±-		APPLICATION SPEC 114-137010		
1 PLC ±-		WEIGHT -		
2 PLC ±-		SIZE A3		
3 PLC ±-		CAGE CODE -		
4 PLC ±-		DRAWING NO. ©-T1209320232000		
ANGLES ±-		RESTRICTED TO -		
FINISH -		SCALE 1:1		
MATERIAL -		SHEET 1 OF 1		
		REV A		