


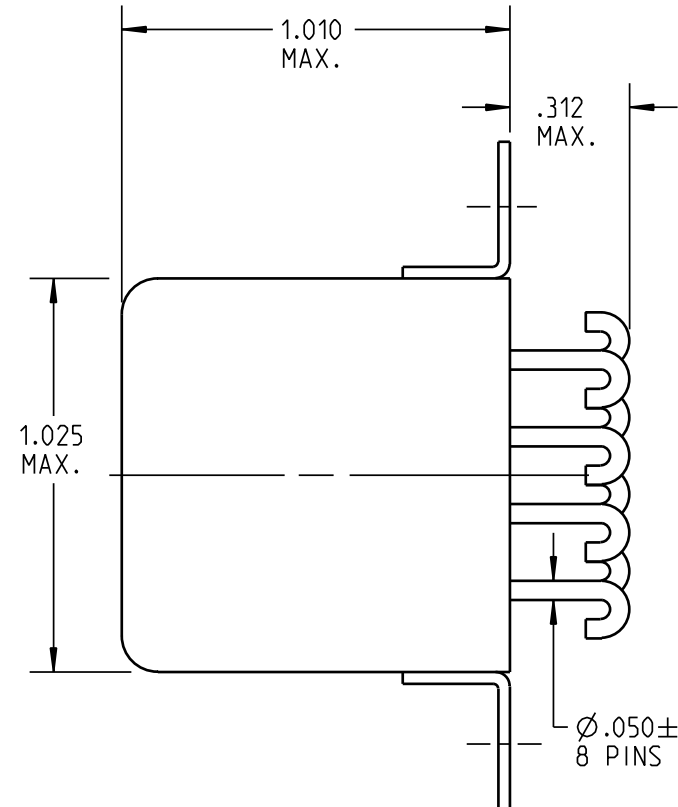

REV.4
DCO 144148

COIL: @ 25°C	
RESISTANCE	170 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.7 VDC
MUST RELEASE	1.15 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.


OPERATE BOUNCE 5 MS MAX.

RELEASE BOUNCE 5 MS MAX.

CUST. QPL
CUST. NO. M5757/23-038 REV. _____

"07" RELAY

CUSTOMER DATA SHEET

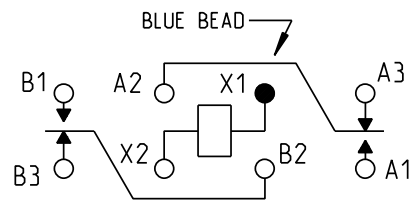

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. R.B. 11/11/91

CK. J.M.B. 1/24/06

CII Technologies™
advanced control electronic solutions

B07D932BZ2-0354