

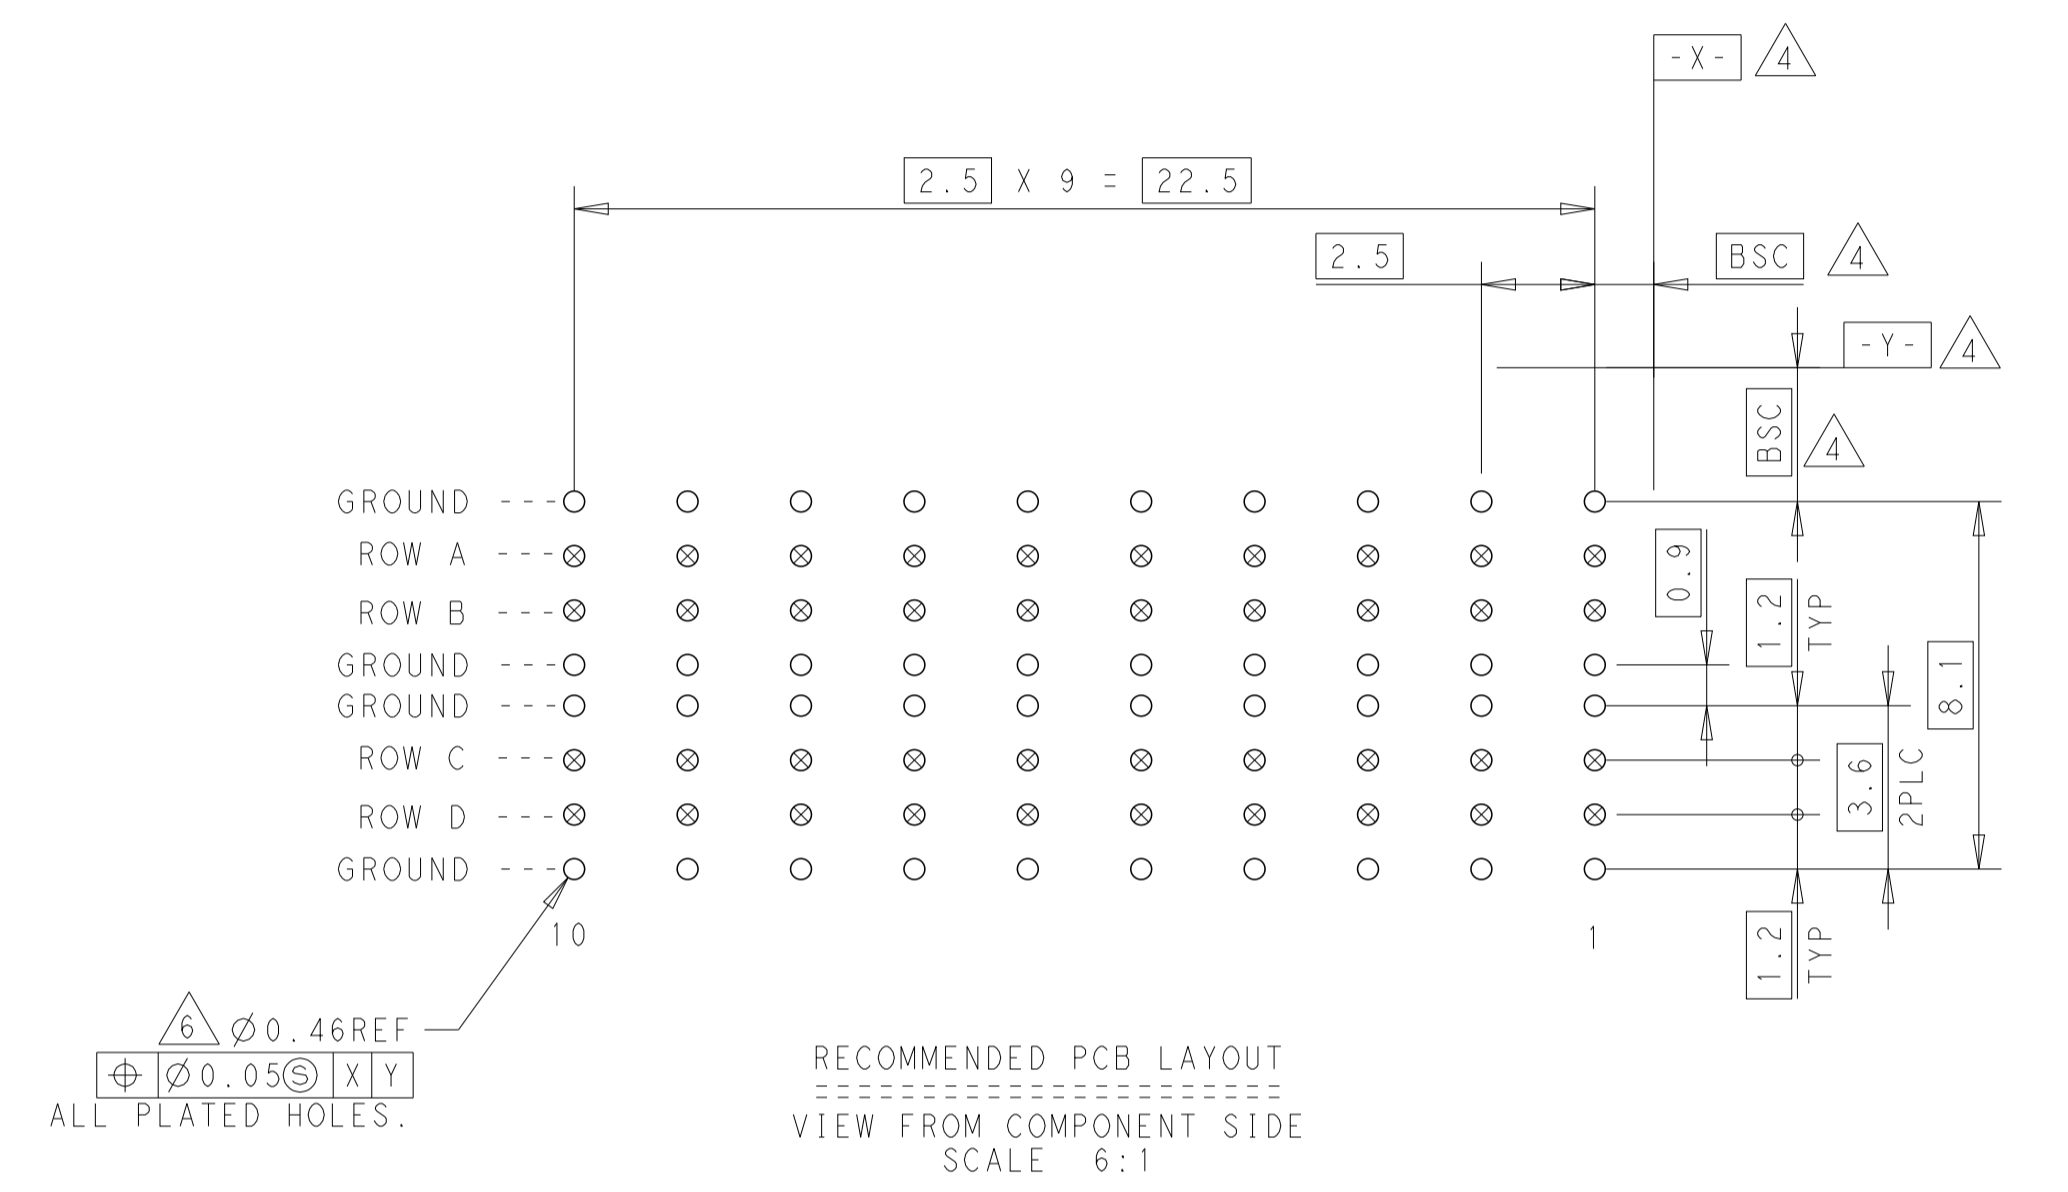
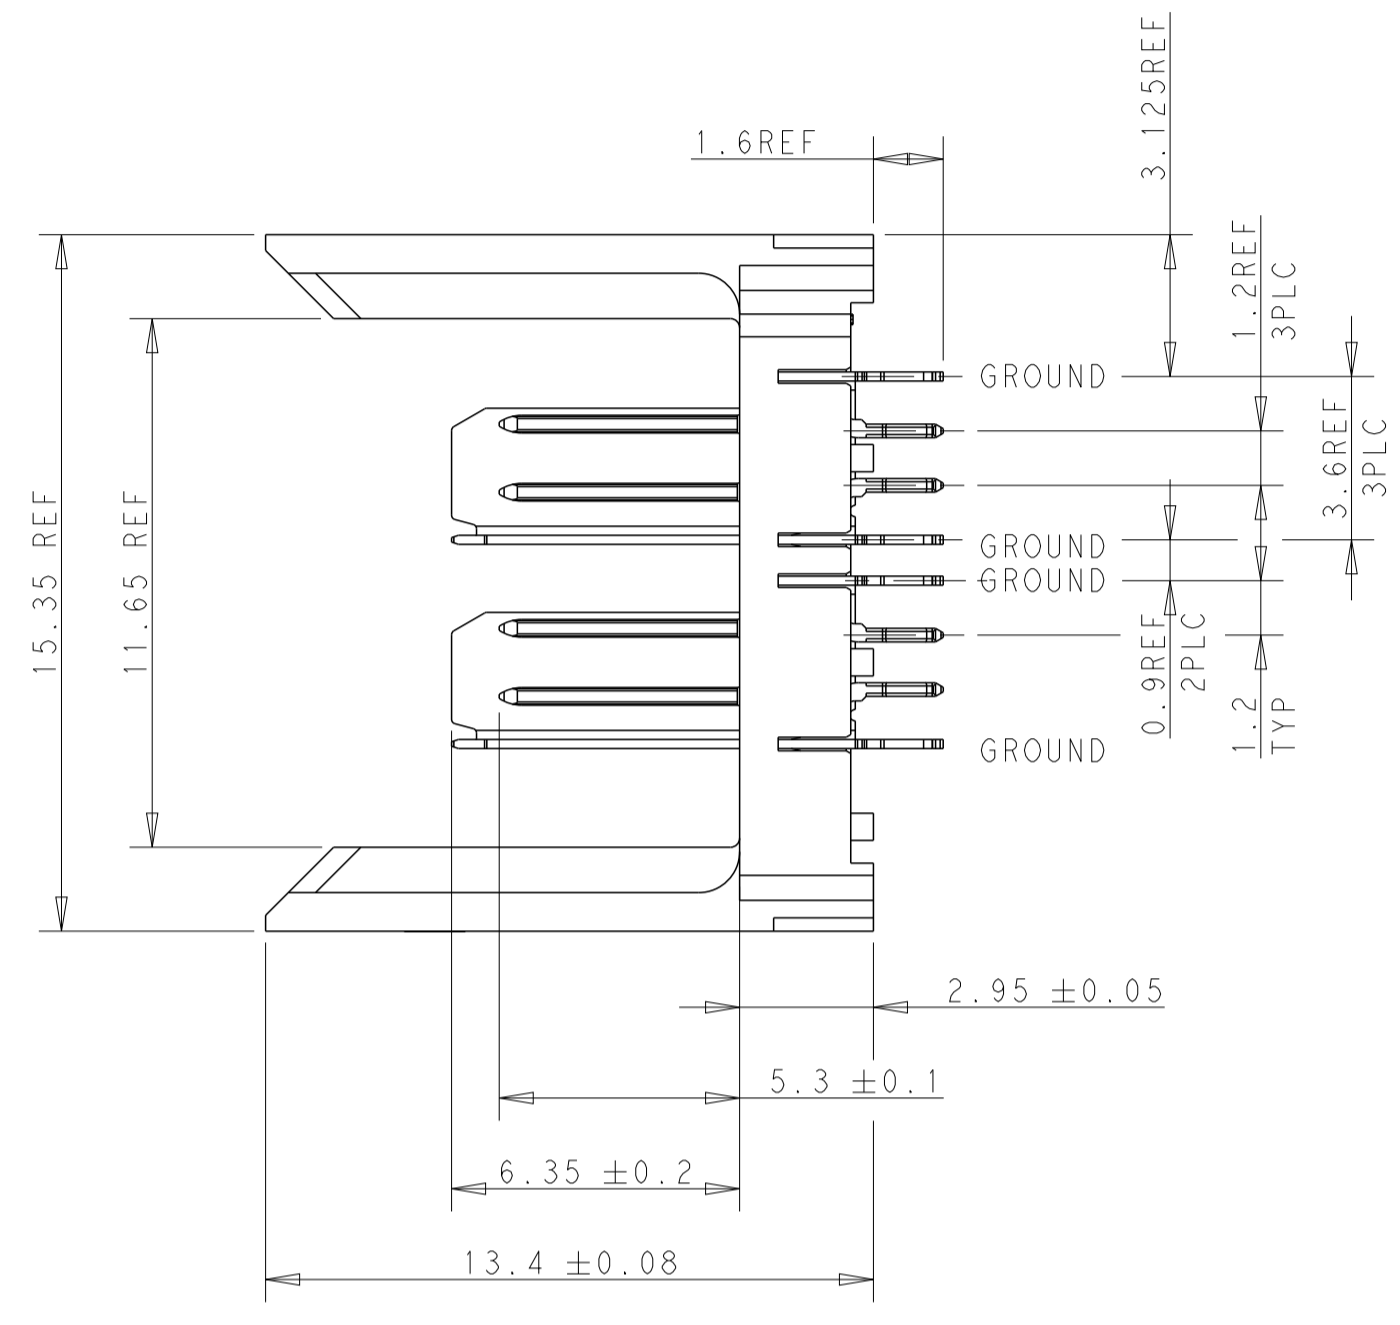


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
A		INITIAL RELEASE	7JAN2013	D.S	A.C		
B		PER ECR-13-008109	20MAY2013	D.S	M.Y		

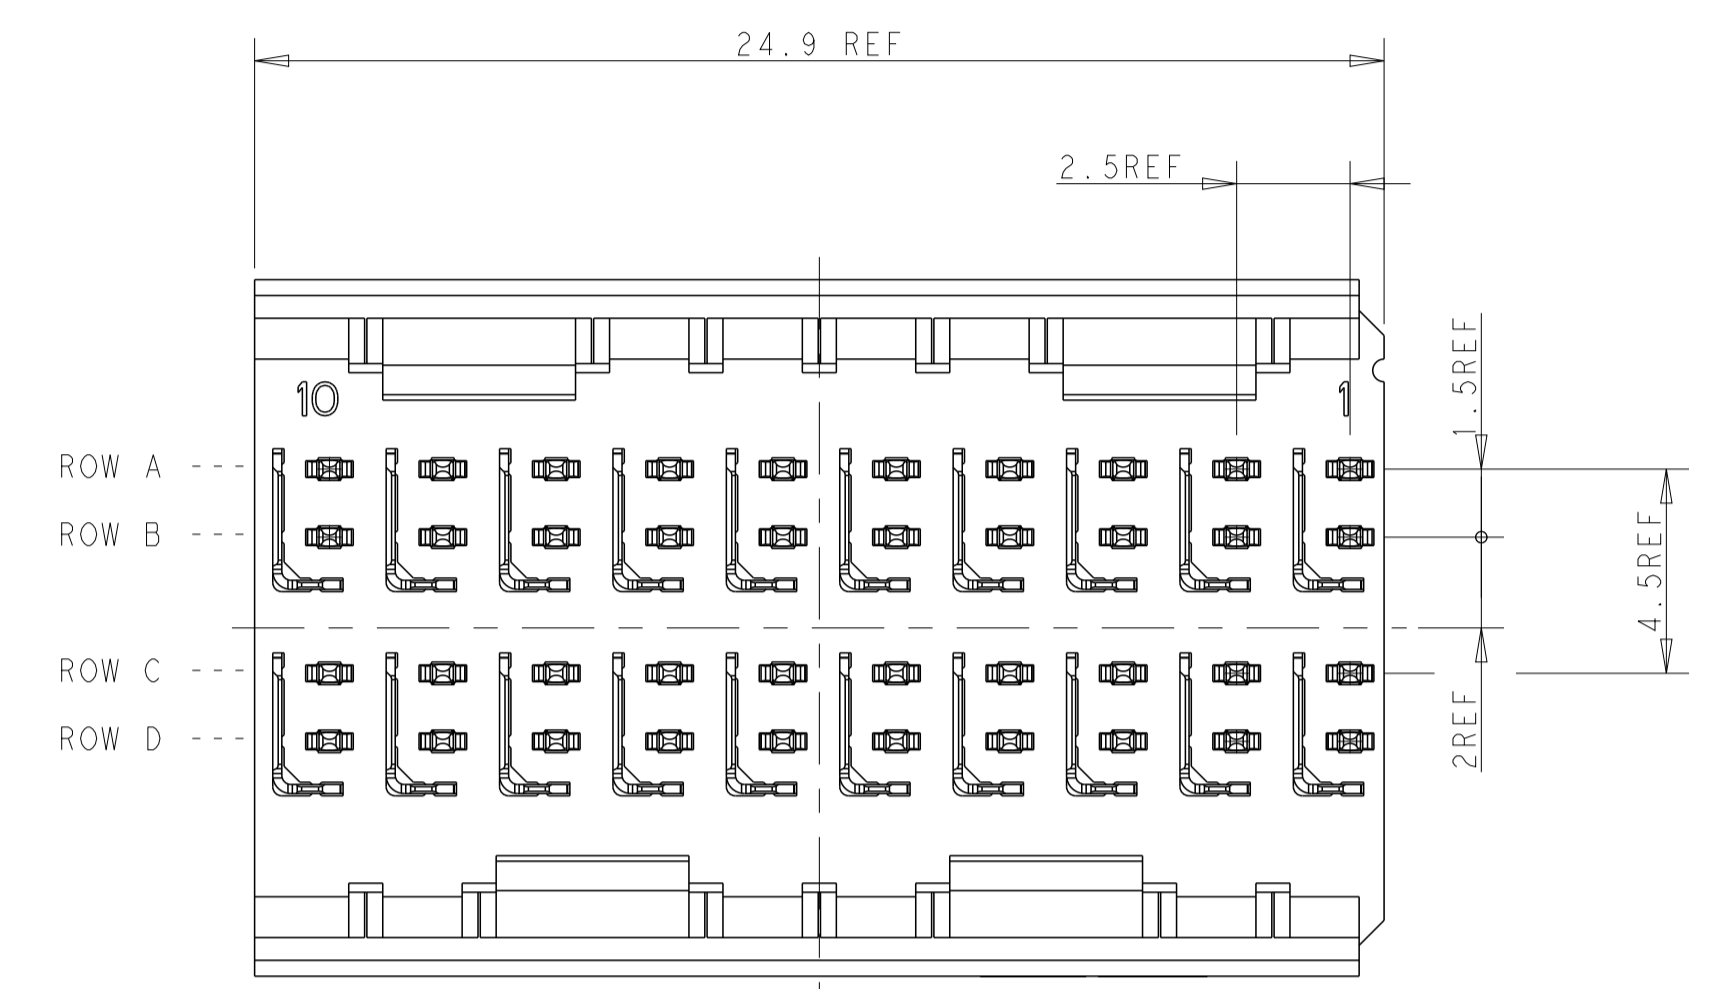

6 Ø0.46 REF  
 Ø0.05 X Y  
 ALL PLATED HOLES.

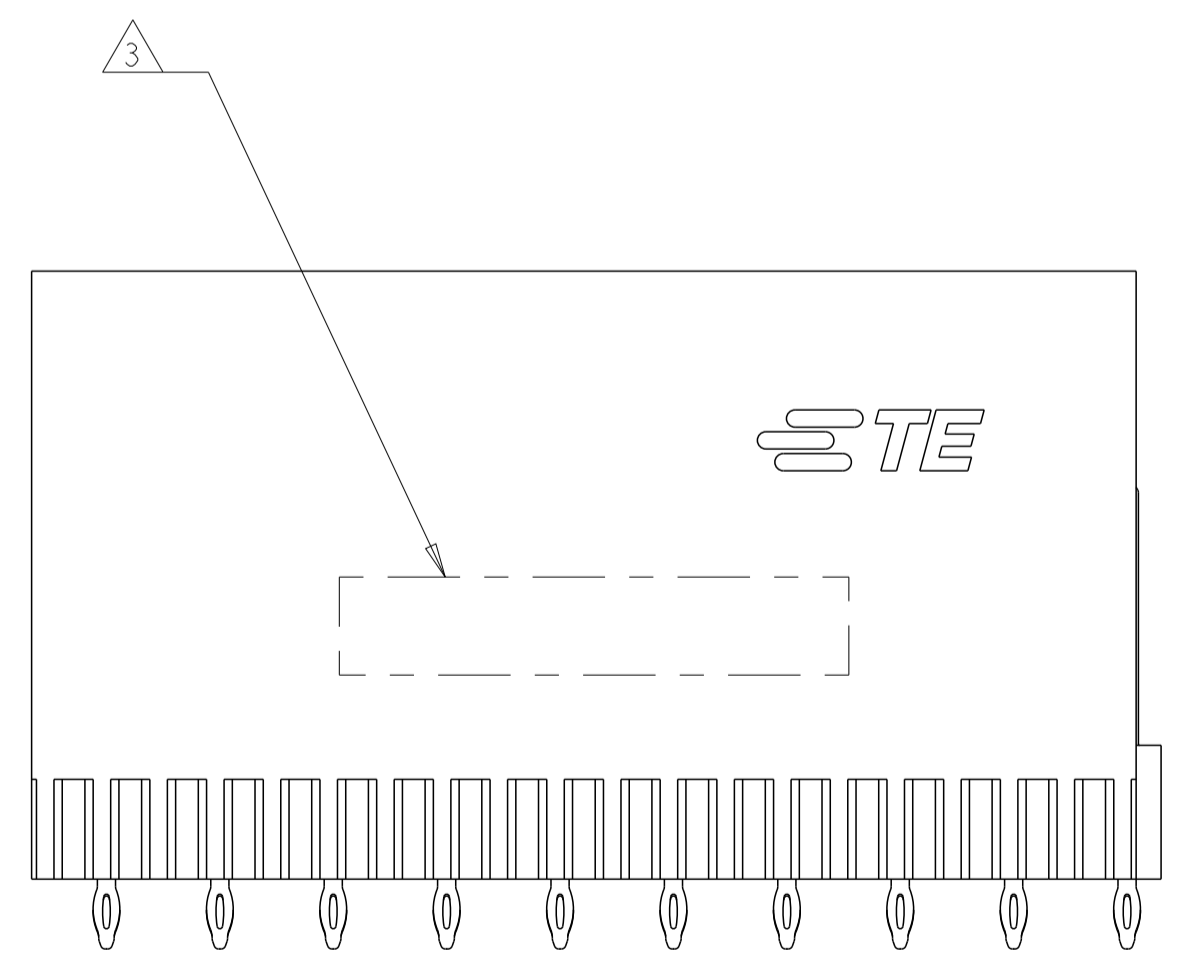

- 1 MATERIAL:  
CONTACT AND SHIELD: PHOSPHOR BRONZE  
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF  
PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA  
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 um MIN MATTE  
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONTACT AREA LUBRICATED WITH BELLCORE  
APPROVED LUBRICANT. TECHNICAL REFERENCE:  
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE  
REFER TO APPLICATION SPEC 114-13059

2170328-1  
 PART NO.

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± 1-PLC ± 2-PLC ±0.20 3-PLC ± 4-PLC ± ANGLES ±		OWN: DAVID SHEN 29APR2012 CHK: SANDERS YAN 29APR2012 APVD: ALEY CAI 29APR2012 PRODUCT SPEC: 108-2055-1 APPLICATION SPEC: 114-13059 WEIGHT: - CUSTOMER DRAWING		NAME: ASSEMBLY DRAWING 2 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER SIZE: A1 CAGE CODE: - DRAWING NO: 2170328 SCALE: 1:1 SHEET: 1 OF 1 REV: B	
-----------------------	--	--	--	---	--	---	--