REV.	DATE	DESCRIPTION
NC	03/30/03	INITIAL RELEASE

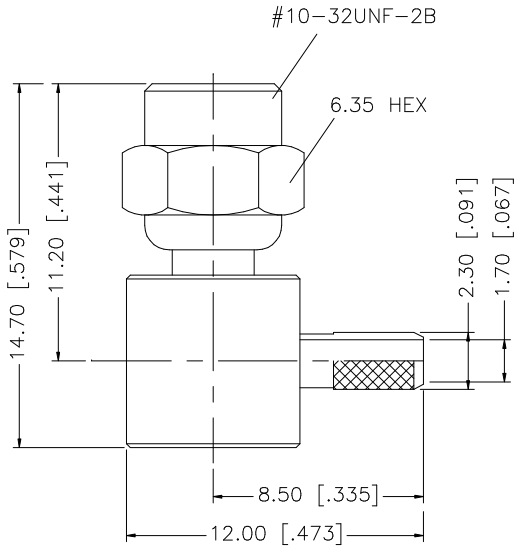



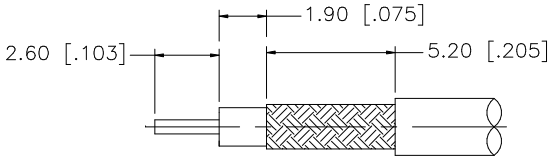

RECOMMENDED
CABLE STRIPPING DIM'S



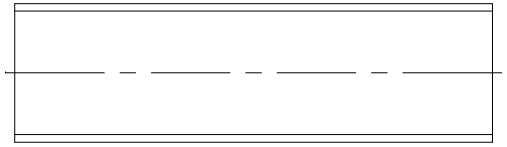

HEAT SHRINK

NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6	HEAT SHRINK TUBE			1
5	FERRULE	BRASS	GOLD	1
4	COVER	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	SHELL/BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	03/30/03
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/152/152107-75.DWG	

Amphenol Connex

PART DESCRIPTION
MINI 75 ohm SMC R/A CRIMP PLUG
(FOR RG-179/U, 187A/U CABLE)

PART NO. 152107-75

DWG. NO.	REV.	SIZE	SCALE
152107-75.DWG	NC	A	NA