



The Delphi NC Series, 12V input, single output, non-isolated point of load DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. This product family provides up to 60A of power in a vertical or horizontal mounted through-hole package. The NC12S0A0V60 will provide up to 60A of output current and the output can be resistor- or voltage-trimmed from 0.9Vdc to 5.0Vdc. It provides a very cost effective point of load solution. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions.

FEATURES

- High Efficiency: 95% @ 12Vin, 5V/60A out
- Voltage and resistor-based trim
- No minimum load required
- Output voltage programmable from
 0.9Vdc to 5.0Vdc via external resistors
- Fixed frequency operation
- Input UVLO, output OTP, OCP, SCP
- Remote ON/OFF (default: positive)
- ISO 9001, TL 9000, ISO 14001, QS9000, OHSAS 18001 certified manufacturing facility
- UL/cUL 60950 (US & Canada) Recognized, and TUV (EN60950) Certified
- CE mark meets 73/23/EEC and 93/68/EEC directives

OPTIONS

- Negative On/Off logic
- Vertical or horizontal versions

APPLICATIONS

- DataCom
- Distributed power architectures
- Servers and workstations
- LAN / WAN applications
- Data processing applications



TECHNICAL SPECIFICATIONS (T_A=25°C, airflow rate=400LFM, V_{in}=12Vdc, nominal Vout unless otherwise noted)

| PARAMETER | NOTES and CONDITIONS | | NC12S0A0V60 | | | |
|--|--|-------|---------------|----------|---------|--|
| | | Min. | Typ. Max. Uni | | | |
| ABSOLUTE MAXIMUM RATINGS | | | | | | |
| Input Voltage | | | | 12.6 | Vdc | |
| Operating Temperature | D. C. and T. and | 0 | | 125 | °C | |
| Storage Temperature | Refer to Figure 36 for the measuring point | -40 | | 125 | °C | |
| Input/Output Isolation Voltage | Non-isolated | | NA | | V | |
| INPUT CHARACTERISTICS | | 44.04 | 40 | 40.0 | V | |
| Operating Input Voltage | | 11.04 | 12 | 12.6 | V | |
| Input Under-Voltage Lockout Turn-On Voltage Threshold | | | 9.4 | | V | |
| Turn-Off Voltage Threshold Turn-Off Voltage Threshold | | | 8.3 | | V | |
| Lockout Hysteresis Voltage | | | 1.1 | | V | |
| Maximum Input Current | 100% Load, 11.04Vin, 5Vout | | 1.1 | 32 | A | |
| No-Load Input Current | 100 % Load, 11.04 viii, 3 vout | | 250 | 32 | mA | |
| Off Converter Input Current | | | 40 | | mA | |
| Input Reflected-Ripple Current | Refer to Figure 35 | | 150 | | mA | |
| Input Voltage Ripple Rejection | 120 Hz | | 45 | | dB | |
| Output Short-Circuit Input Current | | | | 1 | A | |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage Adjustment Range | | 0.9 | | 5.0 | V | |
| Output Voltage Set Point | Vin=12V, Io=Io,max, 1% trim resistors | -3.0 | | +3.0 | % | |
| Output Voltage Regulation | | | | | | |
| Over Load | lo=lo,min to lo,max | -1.5 | | +1.5 | % | |
| Over Line | Vin=Vin,min to Vin,max | -0.2 | | +0.2 | % | |
| Output Voltage Ripple and Noise | 5Hz to 20MHz bandwidth | | | | | |
| Peak-to-Peak | Full Load, 0.1µF ceramic, 10µF tantalum | | | 50 | mV | |
| RMS | Full Load, 0.1μF ceramic, 10μF tantalum | | | 15 | mV | |
| Output Current Range | | 0 | | 60 | Α | |
| Output Voltage Over-shoot at Start-up | Vin=12V, Turn ON | | | 1 | % | |
| Output Voltage Under-shoot at Power-Off | Vin=12V, Turn OFF | | | 100 | mV | |
| Output DC Current-Limit Inception | | | 94 | | Α | |
| DYNAMIC CHARACTERISTICS | | | | | | |
| Out Dynamic Load Response | 12Vin, 10µF Tan & 1µF Ceramic load cap, 10A/µs | | | | | |
| Positive Step Change in Output Current | 50% lo,max to 75% lo,max | | 75 | 100 | mV | |
| Negative Step Change in Output Current | 75% lo,max to 50% lo,max | | 75 | 100 | mV | |
| Settling Time | Settling to be within regulation band (+/- 3.0%) | | | 150 | μs | |
| Turn-On Transient | lo=lo.max | | | 10 | ms | |
| Start-Up Time, From On/Off Control Start-Up Time, From Input | Vin=12V, Vo=10% of Vo,set Vo=10% of Vo,set | | | 10 30 | ms | |
| Minimum Output Startup Capacitive Load | Ex: Four OSCON 6.3V/680μF (ESR 13mΩ max each) | 2720 | | 30 | μF | |
| Maximum Output Startup Capacitive Load | Full load | 2720 | | 8160 | μF | |
| Minimum Input Capacitance | Ex: Three OSCON 16V/270μF (ESR 18mΩ max each) | 810 | | 0100 | μF | |
| EFFICIENCY | Ex. Thiod occord to Vizioni (Edit Tomaz max dadin) | 010 | | | μι | |
| Vo=0.9V | Vin=12V, Io=60A | | 83 | | % | |
| Vo=1.2V | Vin=12V, Io=60A | | 86 | | % | |
| Vo=1.5V | Vin=12V, Io=60A | | 88 | | % | |
| Vo=1.8V | Vin=12V, Io=60A | | 90 | | % | |
| Vo=2.5V | Vin=12V, Io=60A | | 92 | | % | |
| Vo=3.3V | Vin=12V, Io=60A | | 93 | | % | |
| Vo=5.0V | Vin=12V, Io=60A | | 95 | | % | |
| FEATURE CHARACTERISTICS | | | | | | |
| Switching Frequency | | | 300 | | KHz | |
| ON/OFF Control | Positive logic (internally pulled high) | | | | | |
| Logic High | Module On (or leave the pin open) | 2.4 | | 5.5 | V | |
| Logic Low | Module Off | 0 | | 0.8 | V | |
| Remote Sense Range | | | | 400 | mV | |
| GENERAL SPECIFICATIONS | | | | | | |
| Calculated MTBF | Telcordia SR-332 Issue1 Method1 Case3 at 50℃ | | 1.29 | | M hours | |
| Weight | | | 47 | | grams | |
| Over-Temperature Shutdown | Refer to Figure 36 for the measuring point | | 130 | | °C | |

ELECTRICAL CHARACTERISTICS CURVES

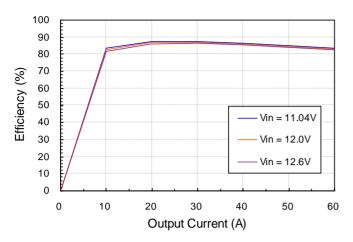


Figure 1: Converter efficiency vs. output current (0.9V output voltage)

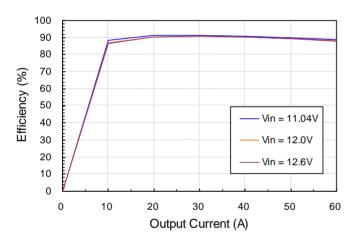


Figure 3: Converter efficiency vs. output current (1.5V output voltage)




Figure 5: Converter efficiency vs. output current (2.5V output voltage)




Figure 2: Converter efficiency vs. output current (1.2V output voltage)




Figure 4: Converter efficiency vs. output current (1.8V output voltage)

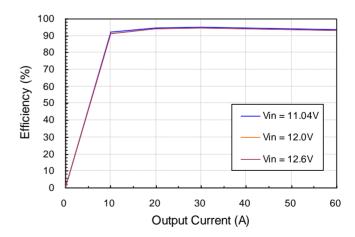


Figure 6: Converter efficiency vs. output current (3.3V output voltage)

ELECTRICAL CHARACTERISTICS CURVES (CON.)

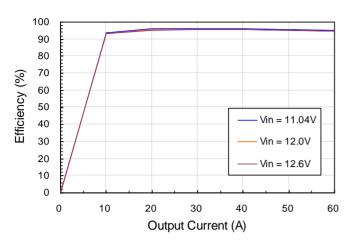


Figure 7: Converter efficiency vs. output current (5V output voltage)

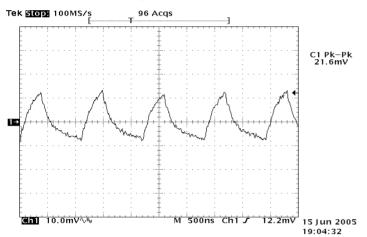


Figure 9: Output ripple & noise at 12Vin, 1.2V/60A out

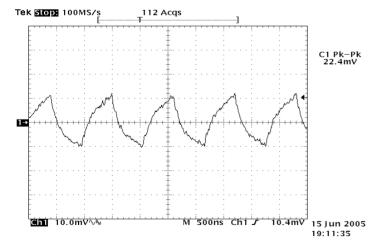


Figure 11: Output ripple & noise at 12Vin, 1.8V/60A out

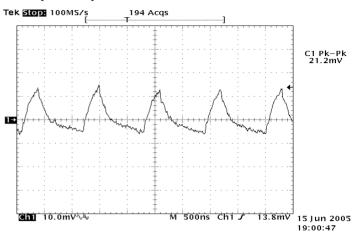


Figure 8: Output ripple & noise at 12Vin, 0.9V/60A out

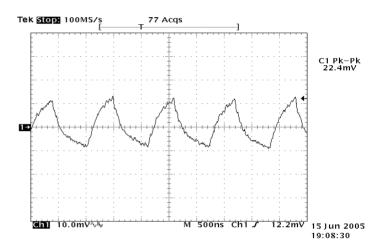


Figure 10: Output ripple & noise at 12Vin, 1.5V/60A out

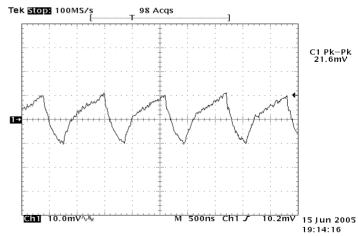


Figure 12: Output ripple & noise at 12Vin, 2.5V/60A out

ELECTRICAL CHARACTERISTICS CURVES (CON.)

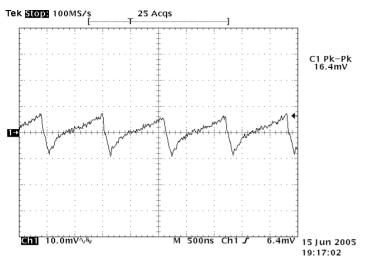


Figure 13: Output ripple & noise at 12Vin, 3.3V/60A out




Figure 15: Turn on delay time at 12Vin, 0.9V/60A out Ch1:OUTEN Ch2:Vout Ch3:PWRGD




Figure 17: Turn on delay time at 12Vin, 3.3V/60A out Ch1:OUTEN Ch2:Vout Ch3:PWRGD

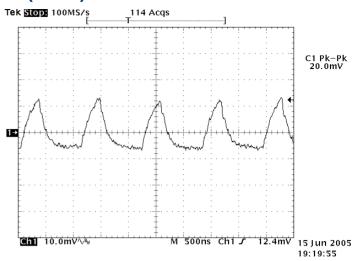


Figure 14: Output ripple & noise at 12Vin, 5V/60A out




Figure 16: Turn on delay time Remote On/Off, 1.2V/60A out Ch1:OUTEN Ch2:Vout Ch3:PWRGD




Figure 18: Turn on delay time Remote On/Off, 5V/60A out Ch1:OUTEN Ch2:Vout Ch3:PWRGD

ELECTRICAL CHARACTERISTICS CURVES (CON.)




Figure 19: Typical transient response to step load change at $10A/\mu S$ from 50% to 75% and 75% to 50% of Io, max at 12Vin, 1.2V out




Figure 21: Typical transient response to step load change at $10A/\mu S$ from 50% to 75% and 75% to 50% of Io, max at 12Vin, 1.8V out




Figure 23: Typical transient response to step load change at $10A/\mu S$ from 50% to 75% and 75% to 50% of Io, max at 12Vin, 3.3V out




Figure 20: Typical transient response to step load change at 10A/µS from 50% to 75% and 75% to 50% of lo, max at 12Vin, 1.5V out




Figure 22: Typical transient response to step load change at 10A/µS from 50% to 75% and 75% to 50% of lo, max at 12Vin, 2.5V out




Figure 24: Typical transient response to step load change at $10A/\mu S$ from 50% to 75% and 75% to 50% of lo, max at 12Vin, 5.0V out

DESIGN CONSIDERATIONS

The NC60A is designed using three-phase synchronous buck topology. Block diagram of the converter is shown in Figure 25. The output can be trimmed in the range of 0.9V to 5.0V by a resistor from trim pin to ground. The remote sense is able to compensate for a drop from the output of converter to point of load.

The converter can be turned on/off by remote control. Positive OUTEN logic implies that the converter DC output is enabled when this signal is driven high (greater than 2.4V) or floating and disabled when low (below 0.8V). Negative OUTEN logic is an option.

The converter provides an open collector signal, Power Good. The power good signal is pulled low when output is not within ±10% of Vout or when Enable is off.

The converter can protect itself into hiccup mode against over current and short circuit condition. Also, the converter will shut down due to over voltage protection is detected.

The converter has an over temperature protection which can protect itself by shutting down for an over temperature event. There is a thermal hysteresis of typically $25\,^{\circ}$ C

Safety Considerations

It is recommended to add a fuse at input line. As to current rating of the fuse, it depends on the output voltage and current setting.




Figure 25: Block Diagram

FEATURES DESCRIPTIONS

Remote On/Off

The remote ON/OFF input allows external circuitry to put the NC converter into a sleep mode. Active-high remote on/off is available as standard.

Active-high units of the NC series are turned on if the remote ON/OFF pin is high (or floating). Pulling the pin low will turn off the unit. To guarantee turn-on the enable voltage must be above 2.4V and to turn off the enable voltage must be pulled below 0.8V

The remote ON/OFF input can be driven in a variety of ways as shown in Figures 26, 27, and 28. If the remote ON/OFF signal originates on the primary side, the remote ON/OFF input can be driven through a discrete device (e.g. a bipolar signal transistor) or directly from a logic gate output. The output of the logic gate may be an open-collector (or open-drain) device. If the drive signal originates from the opposite of an isolated side, the remote ON/OFF input can be isolated and driven through a




Figure26: Remote ON/OFF Input Drive Circuit for Non-Isolated Bipolar




Figure 27: Remote ON/OFF Input Drive Circuit for Logic Driver

FEATURES DESCRIPTIONS (CON.)




Figure 28: Remote ON/OFF Input Drive Circuit

Remote Sense

Remote sense compensates for voltage drops on the output by sensing the actual output voltage at the point of load. The module will compensate for a maximum drop of 400mV. The remote sense connects as shown in Figures 29.

This limit includes any increase in voltage due to remote sense compensation and output voltage set point adjustment (trim).




Figure 29: Effective circuit configuration for remote sense operation

Under Voltage Lockout

The undervoltage lockout prevents the converter from operating when the input voltage is too low. The lockout occurs between 8.3V to 9.4V. This allows more flexibility in designing and ensures operation on supply lines with large tolerances

Over Current and Short-Circuit Protection

When over current condition occurs, the converter enters hiccup mode. Ambient temperature influences the current limit inception point since resistance of MOSFET rises with temperature. The unit will not be damaged in an over current condition because it will be protected by the over temperature protection.

Over Temperature Protection (OTP)

The over temperature protection is non-latching and a temperature sensor monitors the temperature of the PCB near one the main MOSFETS. If temperature exceeds a threshold of $130\,^{\circ}\mathrm{C}$ (typ.) the converter will shut down. When the substrate temperature has decreased by $25\,^{\circ}\mathrm{C}$ the converter will automatically restart.

Over Voltage Protection (OVP)

The converter will shut down when an output over voltage is detected. Once the OVP condition is detected, the controller will stop all PWM outputs and will turn on low-side MOSFET driver to prevent any damage to load.

Current Sharing (optional)

The parallel operation of multiple converters is available with the NC60 (option code B). The converter will share to be within +/ - 10% of load. Note the remote sense lines of the parallel units must be connected at the same point for proper operation in addition to the current share pins being connected. Also, units are intended to be turned on/enabled at the same time. Hot plugging is not recommended. The current share diagram show in Figure 30.

FEATURES DESCRIPTIONS (CON.)

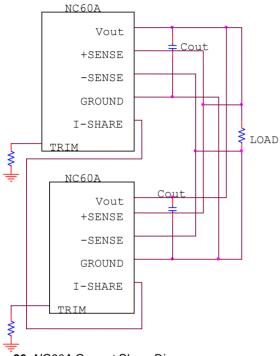


Figure 30: NC60A Current Share Diagram

Output Voltage Programming

The output on the module is trimmable by connecting an external resistor between the TRIM pin (PIN1) and ground as per Figure31 and the typical trim values are shown in Figure 32.

The NC60A module has a trim range of 0.9V to 5.0V. A plot of trim behavior is shown in Figure 33




Figure 31: Trimming Output Voltage

The resistor trim equation for the NC is as follows:

Rset
$$(k\Omega) = \frac{12.69 - Vout}{Vout - 0.9}$$

Where.

Vout is the required voltage setpoint

Rest is the resistance required between TRIM and Ground

Ground

Rest values should not be less than 1.8 kg

| Output Voltage | Rs(Ω) tol |
|----------------|-----------|
| +0.9 V | OPEN |
| +1.2 V | 38.3K |
| +1.5 V | 18.7K |
| +1.8 V | 12.1K |
| +2.5 V | 6.34K |
| +3.3 V | 3.92K |
| +5 V | 1.87K |

Figure 32: Typical Trim Resistor Values

The voltage trim equation with example is as follows:

Example:

$$Vt = 1.25V$$
 Vout = 2.5V Rs = 1 k Ω

Rt =
$$\frac{Rs(13.1Vt + Vout - 12.69)}{0.9Rs - VoutRs - Vout + 12.69}$$
Rt = 0.72 kΩ




Figure 33: Trim Output Voltage – with Voltage Source

Voltage Margin Adjusting

Output voltage margin adjusting can be implemented in the NC60A modules by connecting a resistor, R margin-up, from the Trim pin to the ground pin for adjusting voltage a little bit higher. Also, the output voltage can be adjusted lower by connecting a resistor, R margin-down, from the Trim pin to the output pin. Figure 34 shows the circuit configuration for output voltage margin adjusting.





Figure 34: Circuit configuration for output voltage margining

Output Capacitance

An external output capacitor is required for stable operation.

Reflected Ripple Current and Output Ripple and Noise Measurement

The measurement set-up outlined in Test Configuration Figure 35 have been used for both input reflected/terminal ripple current and output voltage ripple and noise measurements on NC series converters.



Cs=270uF*1 Ltest=1.4uH Cin=270uF*3 Cout=680uF*4

Figure 35:Input Reflected Ripple/Capacitor Ripple Current and Output Voltage Ripple and Noise Measurement Set-Up for NC60A

THERMAL CONSIDERATION

The electrical operating conditions of the NC, namely:


- Input voltage, Vin
- Output voltage, V₀
- Output current, Io

Determine how much power is dissipated within the converter. The following parameters further influence the thermal stresses experienced by the converter:

- Ambient temperature
- Air velocity
- Thermal efficiency of the end system application
- Parts mounted on system PCB that may block airflow
- Real airflow characteristics at the converter location

In order to simplify the thermal design, a number of thermal de-rating plots are provided. These de-rating graphs show the load current of the NC versus the ambient air temperature and air flow. However, since the thermal performance is heavily dependent upon the final system application, the user needs to ensure the thermal reference point temperatures are kept within the recommended temperature rating. It is recommended that the thermal reference point temperatures are measured using a thermocouple or an IR camera. In order to comply with stringent Delta de-rating criteria, the ambient temperature should never exceed 85°C. Please contact Delta for further support..

The maximum acceptable temperature measured at the thermal reference point is 127°C. This is shown in Figure 36.



Note: Wind Tunnel Test Setup

THERMAL CURVES (NC12S0A0V60)

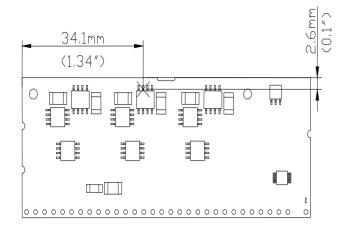


Figure 36: Temperature measurement location * The allowed maximum hot spot temperature is defined at 127 $\mathcal C$

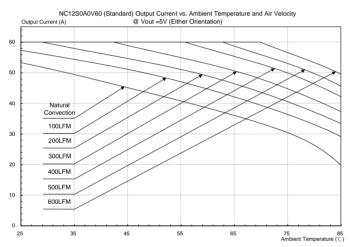


Figure 37: Output current vs. ambient temperature and air velocity @ Vout=5V(Either Orientation)

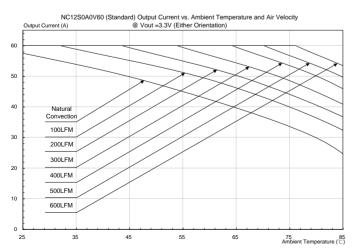


Figure 38: Output current vs. ambient temperature and air hvelocity @ Vout=3.3V(Either Orientation)

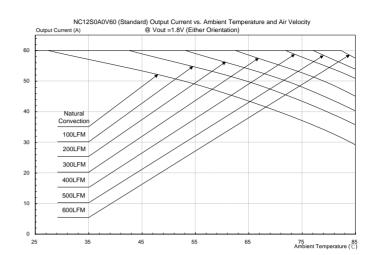


Figure 39: Output current vs. ambient temperature and air velocity @ Vout=1.8V(Either Orientation)



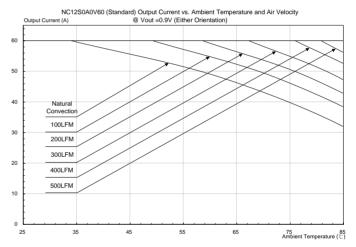


Figure 40: Output current vs. ambient temperature and air velocity @ Vout=0.9V(Either Orientation)

MECHANICAL DRAWING


VERTICAL

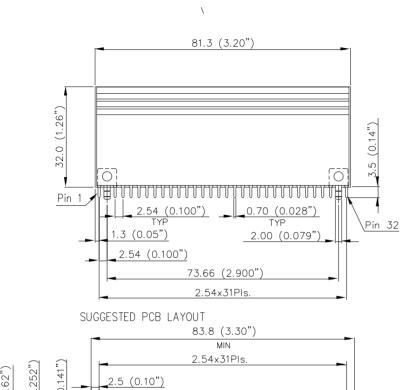



PIN ASSIGNMENT

| PIN# | FUNCTION | PIN# | FUNCTION |
|------|----------|------|----------|
| 1 | +RS | 17 | GROUND |
| 2 | KEY | 18 | VOUT |
| 3 | GROUND | 19 | GROUND |
| 4 | PWRGD | 20 | VOUT |
| 5 | NC | 21 | GROUND |
| 6 | I-SHARE | 22 | VOUT |
| 7 | VSS | 23 | GROUND |
| 8 | VSS | 24 | VOUT |
| 9 | OUTEN | 25 | GROUND |
| 10 | -SENSE | 26 | VOUT |
| 11 | +SENSE | 27 | GROUND |
| 12 | 12VIN | 28 | VOUT |
| 13 | 12VIN | 29 | GROUND |
| 14 | 12VIN | 30 | VOUT |
| 15 | VOUT | 31 | GROUND |
| 16 | VOUT | 32 | VOUT |

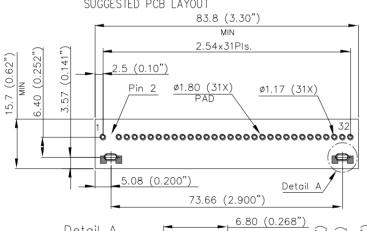


| Detail A Scale 3:1 KEEPOUT TRACE AND | 4.20 (0.165") PAD 3.60 (0.142") THRU 3.00 (0.118") | 0.0) | THRU 2.20 (0.087") | PAD 2.40 (0.095") |
|---------------------------------------|--|------|-----------------------|----------------------|
| COMPONENTS \ | | | | |


UNIT: mm(inch)

NOTES:

DIMENSIONS ARE IN MILLIMETERS AND (INCHS)
TOLERANCE: X.X mm±0.5 mm(X.XX in.±0.02 in.)
X.XX mm±0.25 mm(X.XXX in.±0.010 in.)

HORIZONTAL

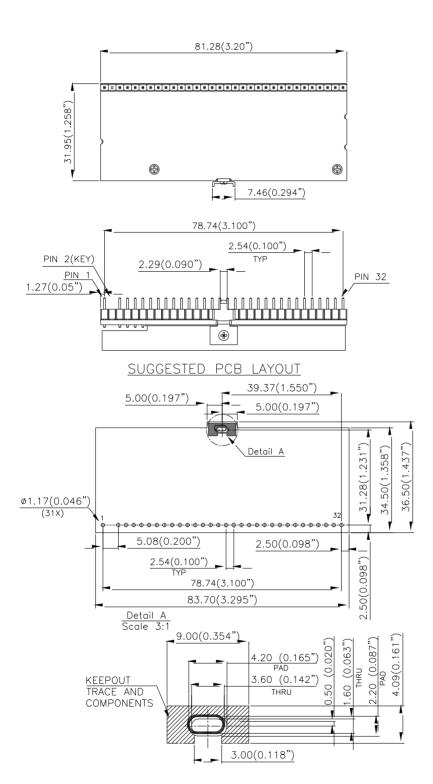



PIN ASSIGNMENT

| PIN# | FUNCTION | PIN# | FUNCTION |
|------|----------|------|----------|
| 1 | +RS | 17 | GROUND |
| 2 | KEY | 18 | VOUT |
| 3 | GROUND | 19 | GROUND |
| 4 | PWRGD | 20 | VOUT |
| 5 | NC | 21 | GROUND |
| 6 | I-SHARE | 22 | VOUT |
| 7 | VSS | 23 | GROUND |
| 8 | VSS | 24 | VOUT |
| 9 | OUTEN | 25 | GROUND |
| 10 | -SENSE | 26 | VOUT |
| 11 | +SENSE | 27 | GROUND |
| 12 | 12VIN | 28 | VOUT |
| 13 | 12VIN | 29 | GROUND |
| 14 | 12VIN | 30 | VOUT |
| 15 | VOUT | 31 | GROUND |
| 16 | VOUT | 32 | VOUT |

NOTES:

DIMENSIONS ARE IN MILLIMETERS AND (INCHES)
TOLERANCES: X.Xmm±0.5mm(X.XX in.±0.02 in.)
X.XXmm±0.25mm(X.XXX in.±0.010 in.)

PART NUMBERING SYSTEM

| NC | 12 | S | 0A0 | V | 60 | Р | N | F | Α |
|-------------------|--------------------|-------------------|----------------------|---------------------------------|-------------------|----------------------------|---------------|----------------------------|--|
| Product Series | Input Voltage | Number of outputs | Output Voltage | Mounting | Output Current | ON/OFF Logic | Pin Length | | Option Code |
| | 12- 11.04~12.6V | 3 - | 0A0- programmable | V- Vertical H- Horizontal | | P- Positive N- Negative | - | F- RoHS 6/6 (Lead Free) | A- Standard Functions B- With current sharing (only for NC30/40/60A) |

MODEL LIST

| Model Name | Packaging | Input Voltage | Output Voltage | Output Current | Efficiency 12Vin @ 100% load |
|-----------------|------------|---------------|----------------|----------------|---------------------------------|
| NC12S0A0V60PNFA | Vertical | 11.04~12.6Vdc | 0.9 V~ 5.0Vdc | 60A | 95% (5.0V) |
| NC12S0A0V60PNFB | Vertical | 11.04~12.6Vdc | 0.9 V~ 5.0Vdc | 60A | 95% (5.0V) |
| NC12S0A0H60PNFB | Horizontal | 11.04~12.6Vdc | 0.9 V~ 5.0Vdc | 60A | 95% (5.0V) |

CONTACT: www.deltaww.com/dcdc

USA: Europe:
Telephone: Telephone: +31-20-655-0967

East Coast: 978-656-3993 West Coast: 510-668-5100 Fax: (978) 656 3964

Email: DCDC@delta-corp.com

Asia & the rest of world:

Telephone: +886 3 4526107 x6220~6224

Fax: +886 3 4513485 Email: DCDC@delta.com.tw

WARRANTY

Delta offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Fax: +31-20-655-0999

Email: DCDC@delta-es.com

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.