


Technical drawing of a mechanical part showing dimensions and tolerances. The drawing includes a central horizontal section with a curved line indicating a transition. Key dimensions and tolerances are labeled:

- Top dimensions: 12,5 (total width), 4,11 (width of top section), 1,37 (width of middle section).
- Bottom dimensions: 2,54 (width of bottom section), 2,74 (width of middle section), 5,49 (width of bottom section).
- Vertical dimensions: 9,4 (height of top section), 10,67 (height of middle section).
- Dimensions and tolerances: $\phi 3 \pm 0,1$ (top hole), $\phi 1 \pm 0,1$ (bottom hole), $\phi 0,1$ (small hole).
- Feature numbers: 1, 2, 3, 4, 5, 6, 9.

Mating Cycles	500
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

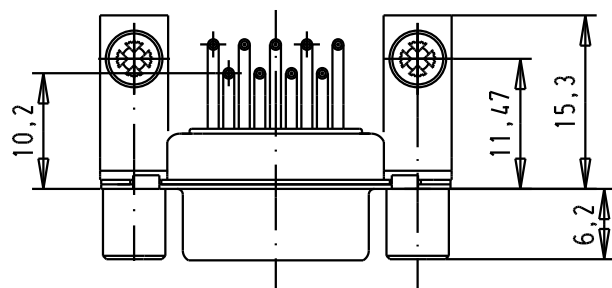

							Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 9 Poles, solder pins, tin plated shell with brackets, screw-locks and board-locks	Mo?Mslab/ Scale 1.5:1
						Detail.	8-JUL-02	CV			
						Insp.					
						Stand.					
09641147235	M3		33231	07/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964114723x	Blatt / Pag 2 / 4
09641147234	UNC 4-40		31058	8-JUL-02	CV						
Part number	screw-lock thread		Mod.	Dat.	Name						