
OA4715 'Challenger Series'



AC Fan - 115V, 230V 120x38mm (4.7"x 1.5")



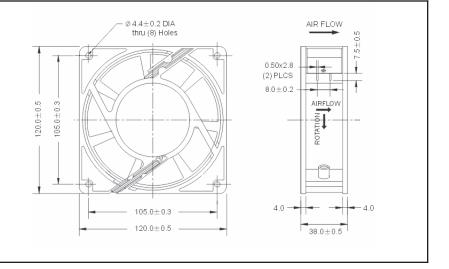

Frame	Diecast Aluminum	On a retire a Tame a return		0.40					
Impeller	PBT, UL94V-0 plastic	Operating Temperature Ball Bearing -10C ~ +70C	<u> </u>	0.35					
Connection	Terminals	Storage Temp -20C ~ +80C	e ("H2O)	0.30					
Motor	AC shaded pole, impedance protected	Life Expectancy Ball Bearing 60,000 hours (L10 at 40C)	ic Pressure	0.20	\downarrow				
Bearing System	Dual ball	Weight: ~1.2 lbs.	Static	0.10	\top				
Insulation Resistance	>100M ohm between lead- wire and frame (500VDC)			0.05	1				
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	m4		0		40 6 f low (0	-	0 10	0 120

Part Number	OA4715-12TB	OA4715-23TB			
Nominal Voltage	115 VAC	230 VAC			
Nominal Current	0.30 A	0.20 A			
Rated Power	24 W (60Hz)	24 W (60Hz)			
Rated Speed (RPM)	3000	3000			
Airflow (CFM)	110	110			
Noise Level (dB)	44	44			
Max. Static Pressure	0.37" H ₂ O	0.37" H ₂ O			

