

preliminary


## Schottky Diode Gen <sup>2</sup>

$$\begin{aligned} V_{RRM} &= 45V \\ I_{FAV} &= 15A \\ V_F &= 0.63V \end{aligned}$$


High Performance Schottky Diode  
Low Loss and Soft Recovery  
Single Diode

Part number

DSA15I45PA

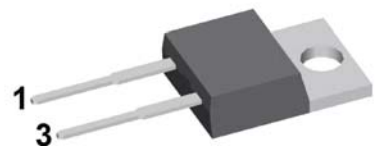

Backside: cathode



### Features / Advantages:

- Very low  $V_f$
- Extremely low switching losses
- Low  $I_{rm}$  values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

### Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

### Package: TO-220


- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

| Schottky   |                                              |                                                                    |                                | Ratings |      |      |               |
|------------|----------------------------------------------|--------------------------------------------------------------------|--------------------------------|---------|------|------|---------------|
| Symbol     | Definition                                   | Conditions                                                         |                                | min.    | typ. | max. | Unit          |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                                      |                                |         |      | 45   | V             |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                                      |                                |         |      | 45   | V             |
| $I_R$      | reverse current, drain current               | $V_R = 45\text{ V}$                                                | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 250  | $\mu\text{A}$ |
|            |                                              | $V_R = 45\text{ V}$                                                | $T_{VJ} = 125^{\circ}\text{C}$ |         |      | 2.5  | mA            |
| $V_F$      | forward voltage drop                         | $I_F = 15\text{ A}$                                                | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 0.75 | V             |
|            |                                              | $I_F = 30\text{ A}$                                                |                                |         |      | 0.91 | V             |
|            |                                              | $I_F = 15\text{ A}$                                                | $T_{VJ} = 125^{\circ}\text{C}$ |         |      | 0.63 | V             |
|            |                                              | $I_F = 30\text{ A}$                                                |                                |         |      | 0.79 | V             |
| $I_{FAV}$  | average forward current                      | $T_C = 155^{\circ}\text{C}$<br>rectangular $d = 0.5$               | $T_{VJ} = 175^{\circ}\text{C}$ |         |      | 15   | A             |
| $V_{F0}$   | threshold voltage                            | } for power loss calculation only                                  |                                |         |      | 0.42 | V             |
| $r_F$      | slope resistance                             |                                                                    |                                |         |      | 9.9  | m $\Omega$    |
| $R_{thJC}$ | thermal resistance junction to case          |                                                                    |                                |         |      | 1.75 | K/W           |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                                                    |                                |         | 0.50 |      | K/W           |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                                         |                                |         |      | 85   | W             |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$ | $T_{VJ} = 45^{\circ}\text{C}$  |         |      | 340  | A             |
| $C_J$      | junction capacitance                         | $V_R = 5\text{ V}$ $f = 1\text{ MHz}$                              | $T_{VJ} = 25^{\circ}\text{C}$  |         | 497  |      | pF            |

preliminary

| Package TO-220 |                              |              | Ratings |      |      |      |
|----------------|------------------------------|--------------|---------|------|------|------|
| Symbol         | Definition                   | Conditions   | min.    | typ. | max. | Unit |
| $I_{RMS}$      | RMS current                  | per terminal |         |      | 35   | A    |
| $T_{VJ}$       | virtual junction temperature |              | -55     |      | 175  | °C   |
| $T_{op}$       | operation temperature        |              | -55     |      | 150  | °C   |
| $T_{stg}$      | storage temperature          |              | -55     |      | 150  | °C   |
| Weight         |                              |              |         | 2    |      | g    |
| $M_D$          | mounting torque              |              | 0.4     |      | 0.6  | Nm   |
| $F_C$          | mounting force with clip     |              | 20      |      | 60   | N    |

### Product Marking

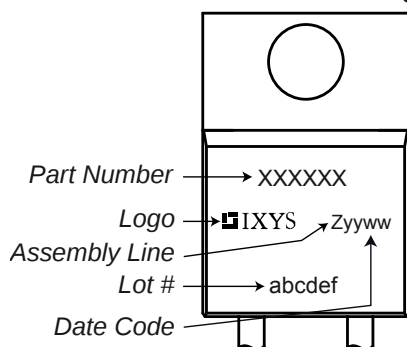

### Part number


D = Diode  
S = Schottky Diode  
A = low VF  
15 = Current Rating [A]  
I = Single Diode  
45 = Reverse Voltage [V]  
PA = TO-220AC (2)

| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-------------|--------------------|---------------|----------|----------|
| Standard | DSA15I45PA  | DSA15I45PA         | Tube          | 50       | 505122   |


### Equivalent Circuits for Simulation

\* on die level

 $T_{VJ} = 175^{\circ}\text{C}$ 

|                                                                                     |                    |                 |    |
|-------------------------------------------------------------------------------------|--------------------|-----------------|----|
|  |                    | <b>Schottky</b> |    |
| $V_{0\max}$                                                                         | threshold voltage  | 0.42            | V  |
| $R_{0\max}$                                                                         | slope resistance * | 6.7             | mΩ |

### Outlines TO-220

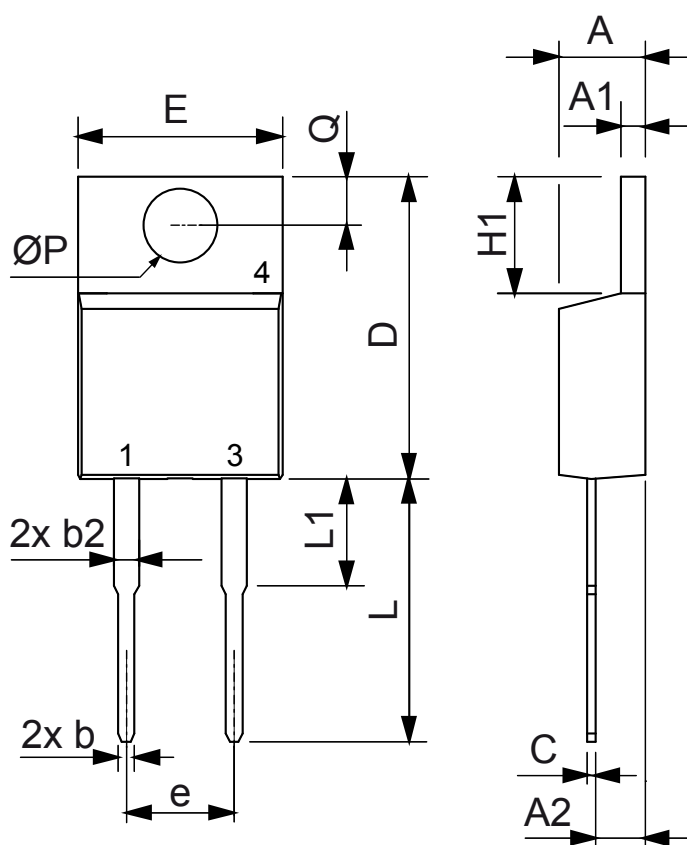

| Dim.            | Millimeter |       | Inches |       |
|-----------------|------------|-------|--------|-------|
|                 | Min.       | Max.  | Min.   | Max.  |
| A               | 4.32       | 4.82  | 0.170  | 0.190 |
| A1              | 1.14       | 1.39  | 0.045  | 0.055 |
| A2              | 2.29       | 2.79  | 0.090  | 0.110 |
| b               | 0.64       | 1.01  | 0.025  | 0.040 |
| b2              | 1.15       | 1.65  | 0.045  | 0.065 |
| C               | 0.35       | 0.56  | 0.014  | 0.022 |
| D               | 14.73      | 16.00 | 0.580  | 0.630 |
| E               | 9.91       | 10.66 | 0.390  | 0.420 |
| e               | 5.08       | BSC   | 0.200  | BSC   |
| H1              | 5.85       | 6.85  | 0.230  | 0.270 |
| L               | 12.70      | 13.97 | 0.500  | 0.550 |
| L1              | 2.79       | 5.84  | 0.110  | 0.230 |
| $\varnothing P$ | 3.54       | 4.08  | 0.139  | 0.161 |
| Q               | 2.54       | 3.18  | 0.100  | 0.125 |

