

## TDM / TDMH / TDML SERIES

### Delay-on-Make Timer



\*8-pin models UL listed when used in combination with P1011-6 socket only.



8-PIN

### Description


The TDM/TDMH/TDML Series is a delay-on-make timer that combines accurate digital circuitry with isolated, DPDT relay contacts in an industry standard 8-pin plug-in package. DIP switch adjustment allows precise selection of the time delay over the full time delay range. The TDM/TDMH/TDML Series is the product of choice for custom control panel and OEM designers.

#### Operation (Delay-on-Make)

Upon application of input voltage, the time delay begins. The output is de-energized before and during the time delay. At the end of the time delay, the output relay energizes and remains energized until input voltage is removed.

**Reset:** Removing input voltage resets the time delay and output.

### Wiring Diagram

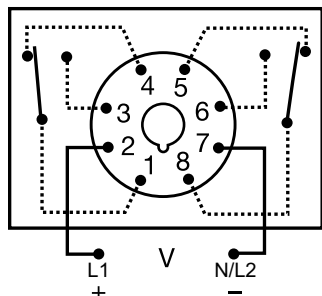

Relay contacts are isolated.

### Features & Benefits

FEATURES	BENEFITS
<b>Wide delay range (0.1s to 2.8h)</b>	User selectable via DIP switches for fine tuning to individual applications.
<b>Microcontroller based</b>	Repeat Accuracy + / - 0.1%
<b>Dip switch adjustment</b>	Provides first time setting accuracy of +/-2%
<b>Setting accuracy +/-2%</b>	Provides flexibility for use in most applications
<b>LED indication</b>	Provides visual indication of time delay status
<b>Isolated 10A, DPDT output contacts</b>	Allows control of loads for AC or DC voltages

### Accessories



#### BZ1 Front Panel Mount Kit

Provides an easy method of through-the-panel mounting of 8- or 11-pin plug-in timers, flashers, and other controls.




#### NDS-8 Octal 8-pin Socket

8-pin 35mm DIN rail or surface mount. Surface mounted with two #6 screws or snaps onto a 35 mm DIN rail. Uses PSC8 hold-down clips.



#### PSC8 or PSC11 Hold-down Clips

Securely mounts plug-in controls in any position. Provides protection against vibration. Use PSC8 with NDS-8 Octal Socket or PSC11 with NDS-11 Socket. Sold in sets of two.



#### P1011-6 Octal Socket for UL listing\*

8-pin surface mount socket with binder head screw terminals. Rated 10A @ 600VAC.



#### C103PM (AL) DIN Rail

35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.

### Ordering Information

MODEL	INPUT VOLTAGE	DELAY RANGE
TDM120AL	120VAC	1 - 1023s in 1s increments
TDM12DL	12VDC	1 - 1023s in 1s increments
TDM230AL	230VAC	1 - 1023s in 1s increments
TDM24AL	24VAC	1 - 1023s in 1s increments
TDM24DL	24VDC/28VDC	1 - 1023s in 1s increments
TDMH120AL	120VAC	10 - 10230s in 10s increments
TDMH24AL	24VAC	10 - 10230s in 10s increments
TDML110DL	110VDC	0.1 - 102.3s in 0.1s increments
TDML120AL	120VAC	0.1 - 102.3s in 0.1s increments
TDML12DL	12VDC	0.1 - 102.3s in 0.1s increments
TDML24DL	24VDC/28VDC	0.1 - 102.3s in 0.1s increments

If you don't find the part you need, call us for a custom product 800-843-8848

## TDM / TDMH / TDML SERIES

### Specifications

#### Time Delay

##### Type

##### Range\*

Digital integrated circuitry  
0.1 - 102.3s in 0.1s increments  
1 - 1023s in 1s increments  
10 - 10,230s in 10s increments  
±0.1% or 20ms, whichever is greater  
±2% or 50ms, whichever is greater  
≤ 50ms  
During Timing - TDMH: ≤ 500ms  
TDM, TDML: ≤ 300ms

##### Repeat Accuracy

##### Setting Accuracy

##### Reset Time

##### Recycle Time

#### Time Delay vs. Temperature & Voltage

##### Indicator

±2%  
LED glows during timing; relay is de-energized

#### Input

##### Voltage

##### Tolerance

##### 12VDC & 24VDC/AC

##### 110VAC/DC to 230VAC

##### AC Line Frequency

##### Power Consumption

12, 24, or 110 VDC; 24, 120, or 230VAC  
-15% - 20%  
-20% - 10%  
50/60 Hz  
≤ 2.25W

#### Output

##### Type

##### Form

##### Rating

Electromechanical relay  
DPDT  
10A resistive @ 120/240VAC & 28VDC;  
1/3 hp @ 120/240VAC  
Mechanical - 1 x 10<sup>7</sup>; Electrical - 1 x 10<sup>6</sup>

#### Life

#### Protection

##### Polarity

##### Isolation Voltage

#### Mechanical

##### Mounting

##### Dimensions

Plug-in socket  
**H** 81.3 mm (3.2"); **W** 60.7 mm (2.39");  
**D** 45.2 mm (1.78")  
Octal 8-pin plug-in

#### Termination

#### Environmental

##### Operating/Storage


##### Temperature

##### Weight

-20° to 65°C / -30° to 85°C  
≈ 6 oz (170 g)

\*For CE approved applications, power must be removed from the unit when a switch position is changed.

### Binary Switch Operation

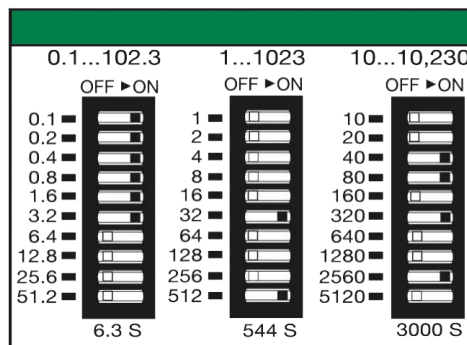

### Function Diagram

