

DO NOT SCALE PRINT

Honeywell

300A NULL BALANCE CURRENT SENSOR

CATALOGUE LISTING


**CSNJ SERIES
MTG - CSN-189**

CHARACTERISTICS

CAT. LISTING	ISSUE NO.	OPERATING TEMPERATURE	SUPPLY	HOUSING MATERIAL	SENSING RANGE		OUTPUT NOMINAL	MAXIMUM COIL RESISTANCE AT 70°C	NUMBER OF TURNS	PRIMARY CONNECTION
					NOMINAL	MAXIMUM				
CSNJ481	1	-40°C TO +85°C	±12v TO ±18v	POLYCARBONATE/ABS BLEND	300A	600A	150mA	25 Ω	2000 ±1	THROUGH HOLE
CSNJ481-001	1	-40°C TO +85°C	±12v TO ±18v	POLYCARBONATE/ABS BLEND	300A	600A	150mA	25 Ω	2000 ±1	BUSBAR
CSNJ481-002	1	-40°C TO +85°C	±12v TO ±18v	POLYCARBONATE/ABS BLEND	300A	600A	150mA	25 Ω	2000 ±1	THROUGH HOLE

NOTES:-

1 INK COLOUR BLACK.

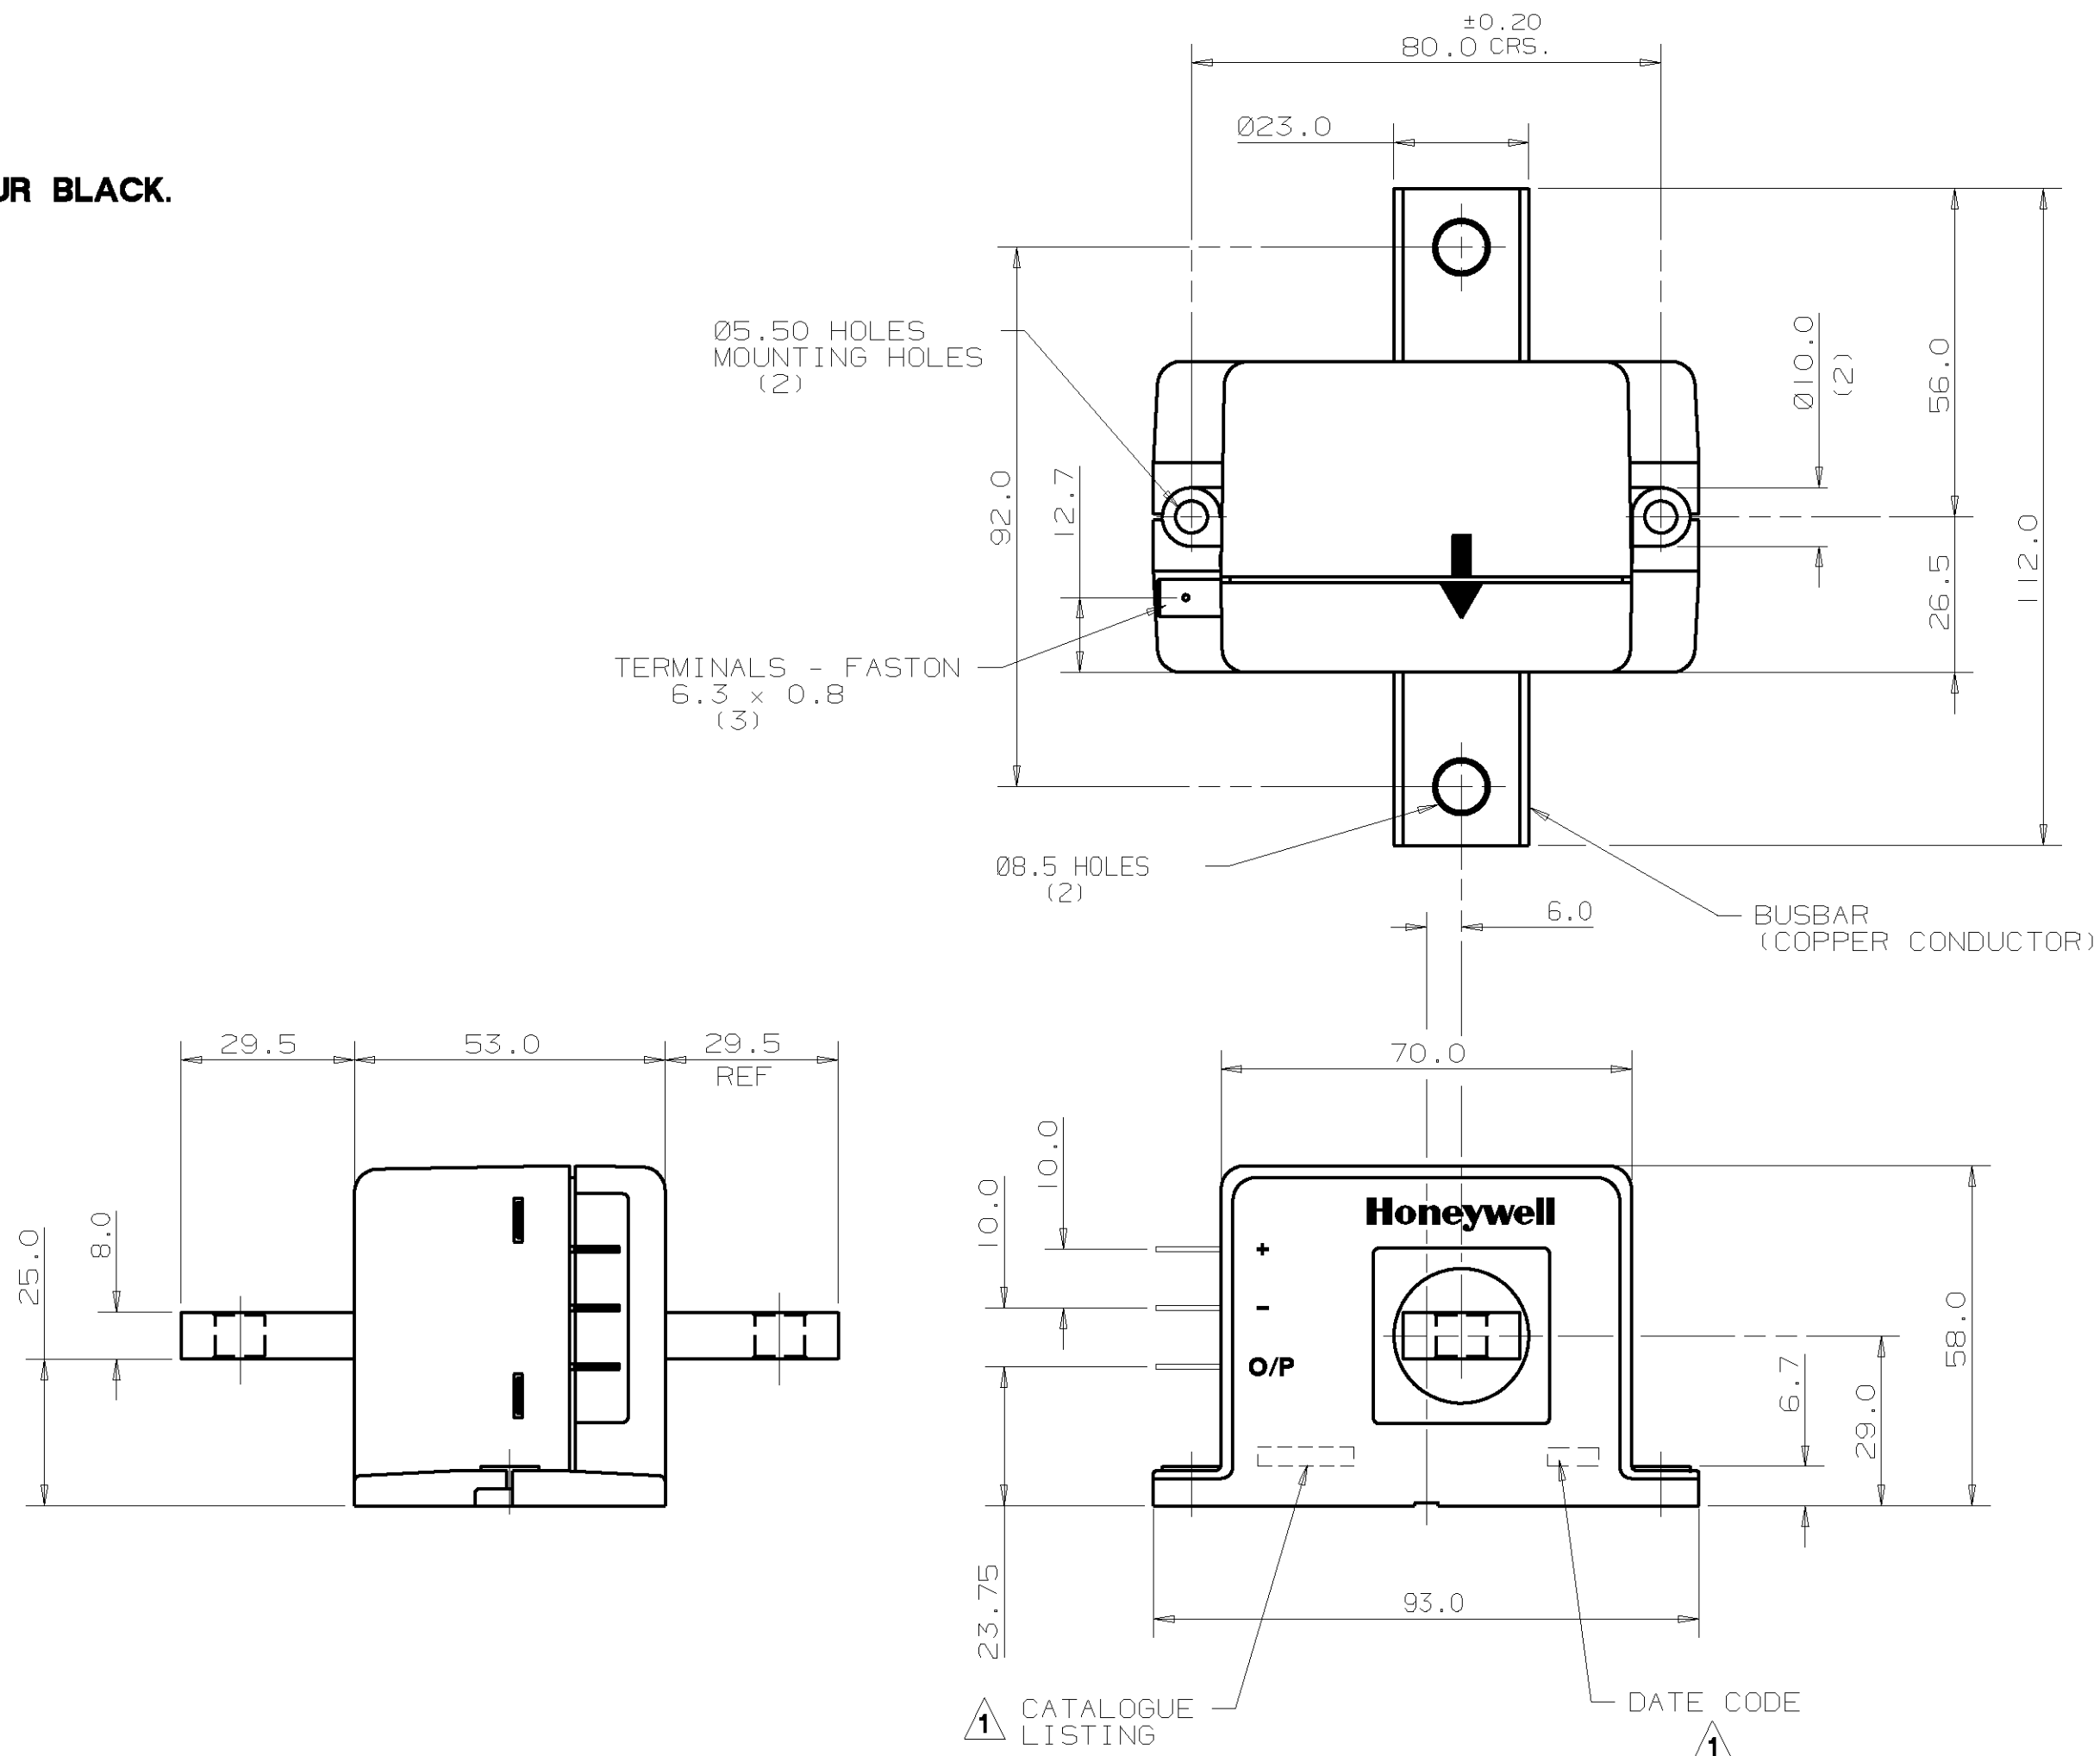

**CSNJ SERIES
MTG - CSN-189**

M

DRAWING NUMBER

ISSUE

REPLACES

A295-02A

RELEASE NUMBER

REVISIONS


3/95

DRAWN M. Loch

CHECK
DESIGN
AUTHOR*N

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD. THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE PROJECTION



SCALE:- 1/1

DIMENSIONS ARE IN MILLIMETRES

MODIFY ON CAD3D SYSTEM ONLY

GENERAL TOLERANCE = ±0.30