
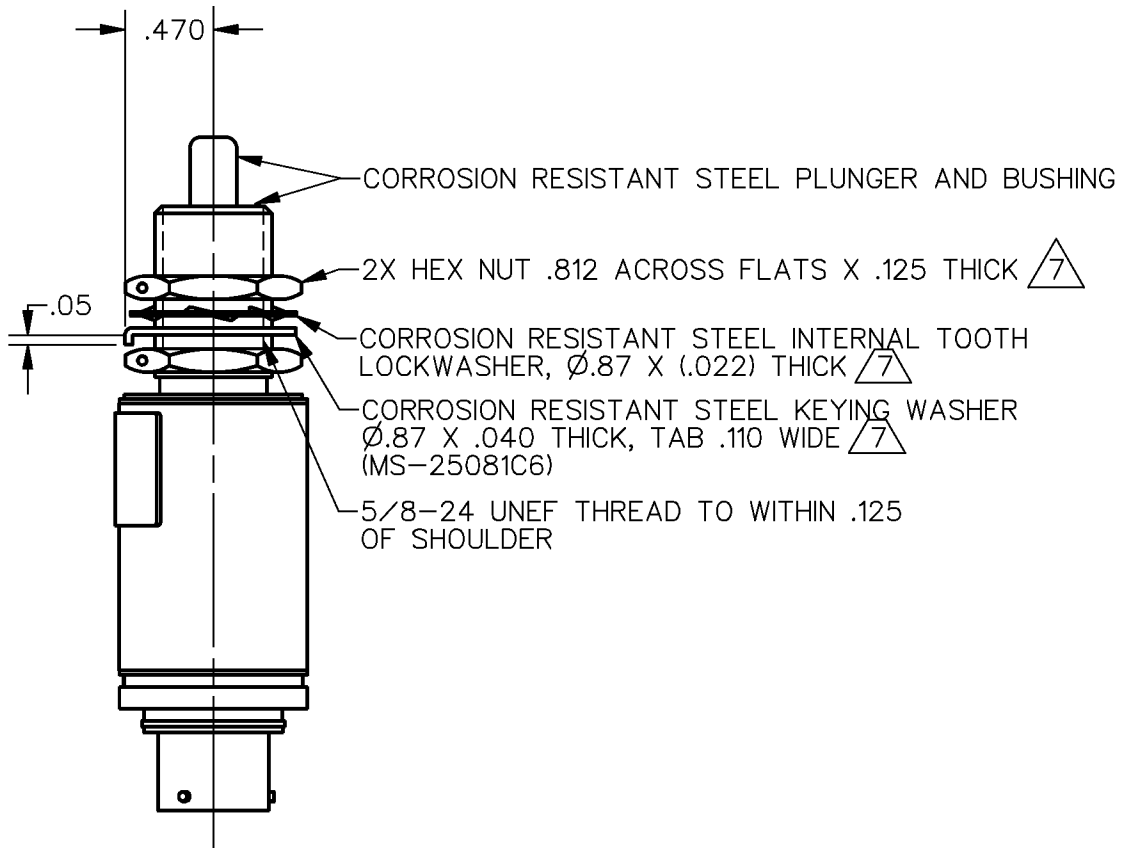
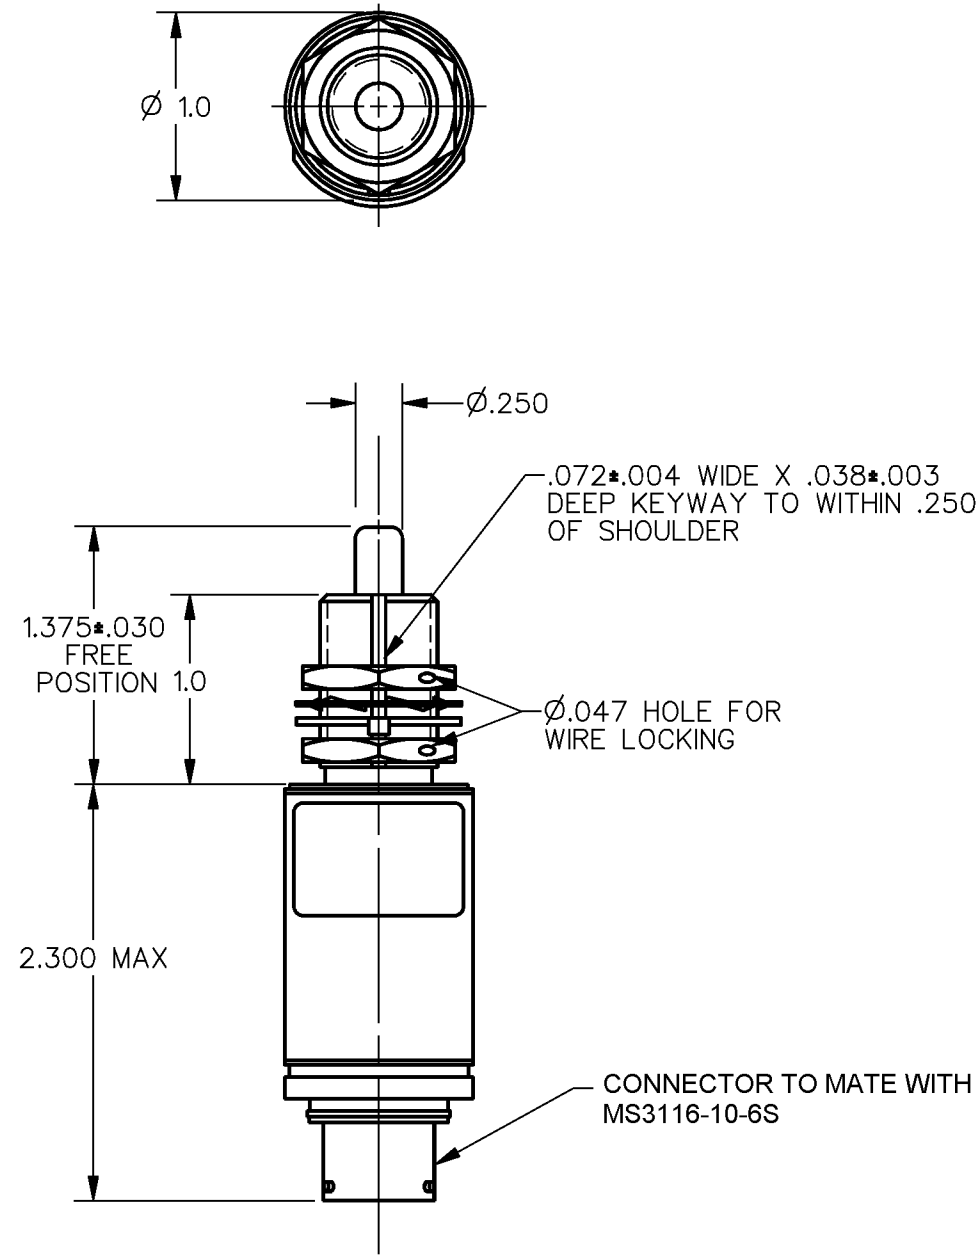
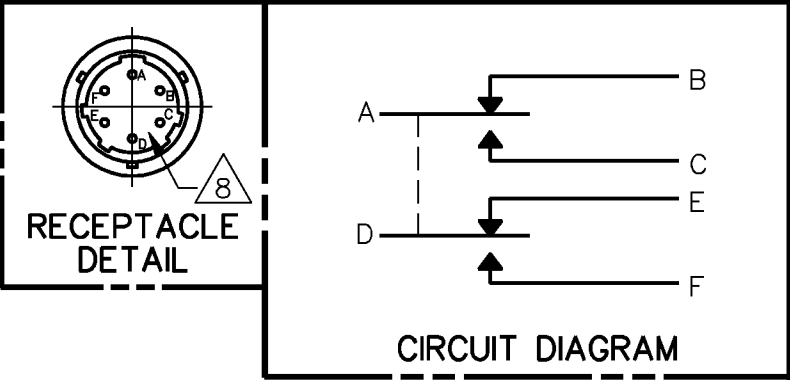


CATALOG LISTING
1HE44-RB
PAGE 1 OF 1
ISSUE
11
REVISIONS
A OBS. CO68450
23 AUG 90
B REINST. PR19824
27 JAN 92
C CO-81044B
G J W
1 OCT 96
D CO-93970
S A V
14 JAN 99
E 0044462
JA
07OCT08
CHECK
07OCT08
BLR
27JUN92
A W
27JAN92
S A V
DRAWN
MASTER



- NOTES
- 1 - CORROSION RESISTIVE STEEL ENCLOSURE NO. 15193 PER FED. STD. 595
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 5
 - 3 - CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 4 - FOR OPERATION IN TEMPERATURES OF -65°F TO +257°F
 - 5 - PLUNGER SEAL MATERIAL E.P. RUBBER
 - 6 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 INCH OF PLUNGER TRAVEL
 - 7 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 8 - INTERFACIAL SEAL

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL
OPERATING FORCE — — — — 6-12 LB		CONTACT ARRANGEMENT			DO NOT SCALE PRINT
FULL OVERTRAVEL FORCE --- 30 LB MAX		2X S P D T			
RELEASE FORCE — — — — 4 LB MIN		LOAD	28 VDC		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT 5.5 OZ MAX
PRETRAVEL — — — — .040 MAX			SEA LEVEL	100,000 FT.	
DIFFERENTIAL TRAVEL — — — .020 MAX		RES	5	5	
OVERTRAVEL — — — — .250 MIN		IND	3	3	
		MOTOR	4	4	