


**May not be suitable for all medical and aerospace applications.**

**Specifications: Contact Mallory Sonalert to discuss your application.**

|                                |                                     |
|--------------------------------|-------------------------------------|
| Oscillation Frequency (Hz)     | 2300 ± 400                          |
| Operating Voltage (Vdc)        | 9.0 ~ 15                            |
| Rated Voltage (Vdc)            | 12                                  |
| Current Consumption Max. (mA)  | 50 at Rated Voltage                 |
| Sound Pressure Level Min. (dB) | 85 at 10cm at Rated Voltage         |
| Tone/Pulse Rate                | Constant                            |
| Operating Temperature (°C)     | -40 ~ +80                           |
| Storage Temperature (°C)       | -40 ~ +80                           |
| Housing                        | PPO plastic resin<br>(Color: Black) |
| Leading Pin                    | Tin Plated Brass                    |
| Weight (Grams)                 | 1.8                                 |
| Options                        | For other options contact factory   |

**Dimensions:** (units: mm)

**ROHS Compliant**

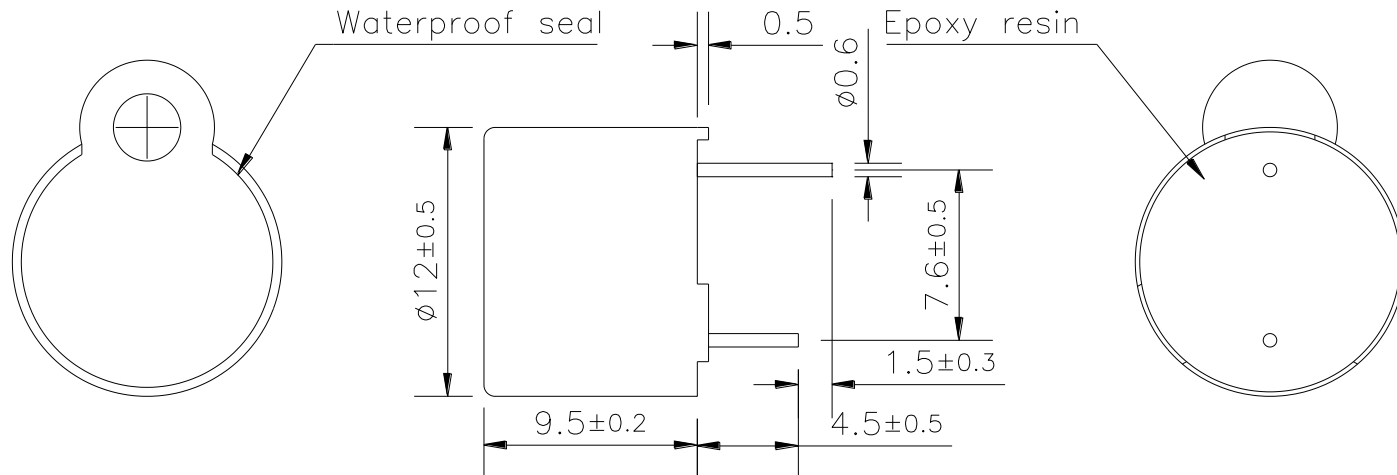

**Packaging:**

Parts are supplied in tube (40 per tube).