
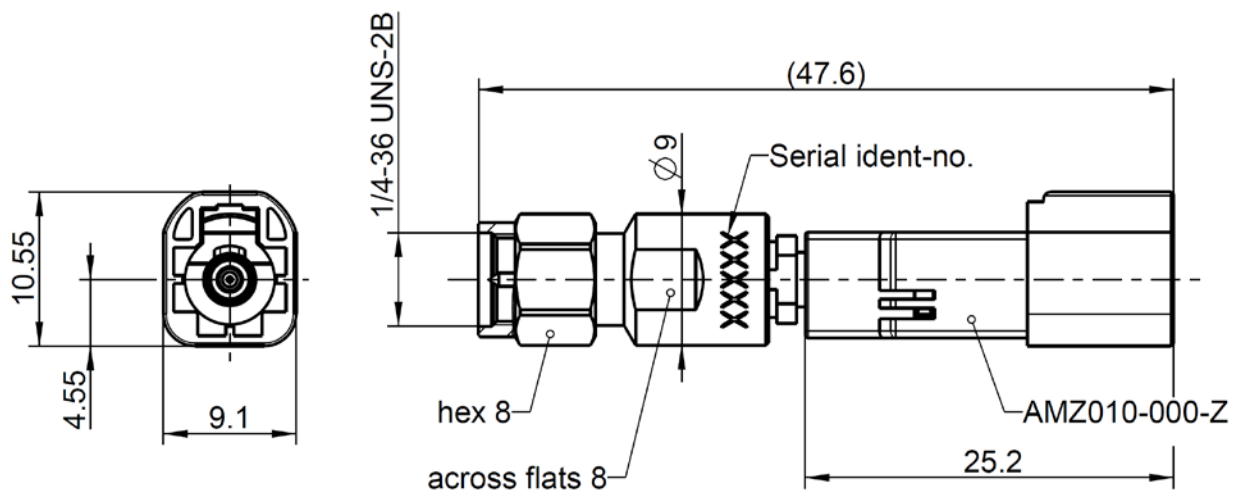




All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

RPC-3.50 according to
RPC-3.50 mechanically compatible with
HFM according to

IEC 60169-23
RPC-2.92 and SMA
RN_108-01

Documents

Application note

AN001 "Calibration Services"

Material and plating

Connector parts

Center contact
Outer contact RPC-3.50
Outer contact HFM
Dielectric RPC-3.50
Dielectric HFM
Coupling nut RPC-3.50
Gasket RPC-3.50
Housing HFM
Secondary lock HFM

Material

CuBe
Stainless steel
Brass
PS
PEI
Stainless steel
Silicone
PBT GF20
PBT GF20

Plating

Gold, min. 1.27 μ m, over chemical nickel
Passivated
Gold, min. 1.27 μ m, over chemical nickel
Passivated

Electrical data

Frequency	DC to 15 GHz
Return loss	≥ 34 dB, DC to 1 GHz ≥ 25 dB, 1 GHz to 6 GHz ≥ 20 dB, 6 GHz to 12 GHz ≥ 18 dB, 12 GHz to 15 GHz

Mechanical data

	RPC-3.50	HFM
Mating cycles	≥ 500	≥ 500 ³
Mating cycles housing		≥ 25
Maximum torque	1.70 N	
Recommend torque	0.80 Nm to 1.10 Nm	
Engagement force		≤ 15 N
Disengagement force		≥ 2 N
Gauge	0.00 mm to 0.08 mm	

³ Limitations are possible due to the quality of the used mating connector

General standard definition

For proper operation the vector network analyser (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	143.0889 ps
Length (electrical) / Offset Length	42.90 mm
Offset Loss	4.26 G Ω /s
Loss	0.0529 dB / $\sqrt{GHz}$

Environmental data

Operating temperature range ¹	+20 °C to +26 °C
Rated temperature range of use ²	0 °C to + 50 °C
Storage temperature range	-40 °C to +85 °C

RoHS	compliant
------	-----------

¹ Temperature range over which these specifications are valid.

² This range is underneath and above the operating temperature range, within the open circuit is fully functional and could be used without damage

RF_35/05.10/6.1 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger																			
CALIBRATION ADAPTOR RPC-3.50 Plug – HFM Plug				03S1AM-S20S3																			
Declaration of calibration options Factory Calibration Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to Rosenberger standards, national / international standards are not available. Model based standard definitions are reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Accredited Calibration Not available. For further, more detailed information see application note AN001 on the Rosenberger homepage. Calibration interval <table><tr><td>Recommendation</td><td>12 months</td></tr></table> Weight <table><tr><td>8.5 g/pce</td></tr></table>								Recommendation	12 months	8.5 g/pce													
Recommendation	12 months																						
8.5 g/pce																							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																							
<table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td></tr><tr><td>Florian Reiner</td><td>09.03.16</td><td>Martin Moder</td><td>24.11.17</td></tr></table>				Draft	Date	Approved	Date	Florian Reiner	09.03.16	Martin Moder	24.11.17	<table><tr><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>300</td><td>17-1951</td><td>M. Rahberger</td><td>24.11.17</td></tr></table>				Rev.	Engineering change number	Name	Date	300	17-1951	M. Rahberger	24.11.17
Draft	Date	Approved	Date																				
Florian Reiner	09.03.16	Martin Moder	24.11.17																				
Rev.	Engineering change number	Name	Date																				
300	17-1951	M. Rahberger	24.11.17																				
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 3 / 3																