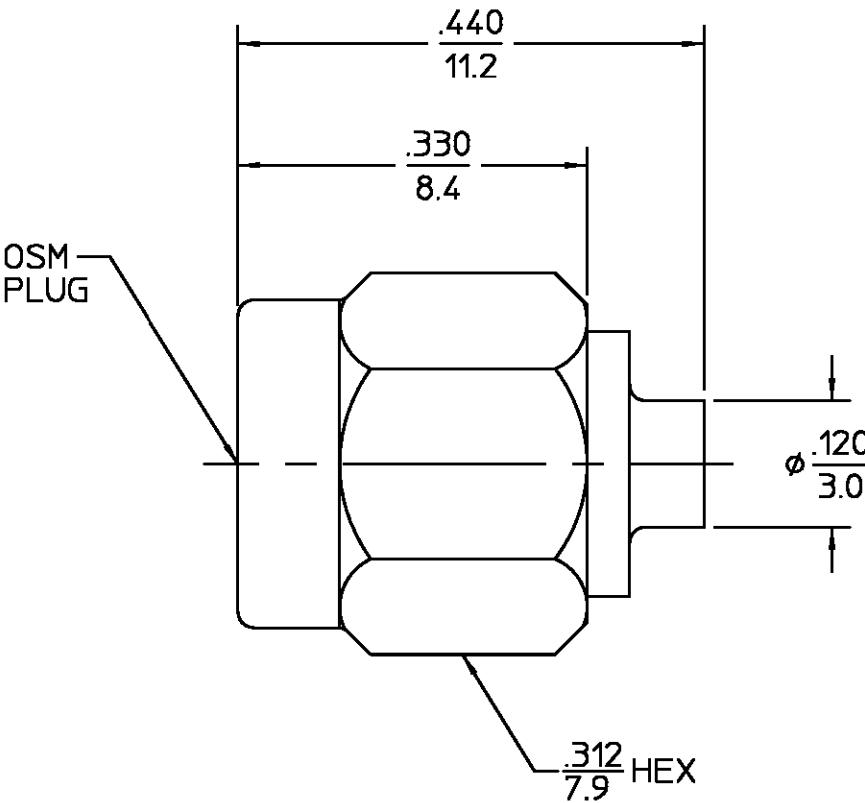


			DESIGNED FOR USE WITH .085 DIA S.R. CABLE		REVISIONS																																														
			CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION	DATE	APPROVED																																											
			CONTACT .0215		010	RELEASED	PATLAN 8/31/98																																												
			HOUSING .088																																																
<table><tr><th>ELECTRICAL</th><th>MECHANICAL</th><th>ENVIRONMENTAL</th></tr><tr><td>Nominal Impedance (Ohms) 50</td><td>Interface Dimensions MIL-STD-348A</td><td>Temperature Rating -65°C to 165°C</td></tr><tr><td>Frequency Range (GHz) DC to 18.0</td><td>Fig. 310.1</td><td>Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Volt Rating (VRMS MAX) @ Sea Level 335</td><td>Recommended Mating Torque 7 to 10 in-LBs</td><td>Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td>VSWR 1.07 + .008f(GHz)</td><td>Mating Characteristics:</td><td>Thermal Shock MIL-STD-202, Method 107, Condition B,</td></tr><tr><td>Insertion Loss (dB MAX) .03 √f(GHz)</td><td>Insertion (MAX Lbs) N/A</td><td>Except High Temp 115°C</td></tr><tr><td>RF Leakage (dB MIN) -[90-f(GHz)]</td><td>Withdrawal (MIN Oz) N/A</td><td>Moisture Resistance MIL-STD-202, Method 106</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 250</td><td>Force to Engage and Disengage (In-Lbs MAX) 2.0</td><td>Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr><tr><td>Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000</td><td>Center Contact Captivation</td><td></td></tr><tr><td>Contact Resistance (Milliohms MAX)</td><td>Axial (Lbs) N/A</td><td></td></tr><tr><td>Center Contact 3.0</td><td>Radial (In-Oz) N/A</td><td></td></tr><tr><td>Outer Contact 2.0</td><td>Cable Retention</td><td></td></tr><tr><td>Cable to Housing .05</td><td>Axial Force (Lbs) 30</td><td></td></tr><tr><td>RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670</td><td>Torque (In-Oz) 16</td><td></td></tr><tr><td>I.R.(Megohms MIN) 5,000</td><td>Weight (Grams) 1.8</td><td></td></tr></table>			ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A	Temperature Rating -65°C to 165°C	Frequency Range (GHz) DC to 18.0	Fig. 310.1	Vibration MIL-STD-202, Method 204, Condition D	Volt Rating (VRMS MAX) @ Sea Level 335	Recommended Mating Torque 7 to 10 in-LBs	Shock MIL-STD-202, Method 213, Condition I	VSWR 1.07 + .008f(GHz)	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B,	Insertion Loss (dB MAX) .03 √f(GHz)	Insertion (MAX Lbs) N/A	Except High Temp 115°C	RF Leakage (dB MIN) -[90-f(GHz)]	Withdrawal (MIN Oz) N/A	Moisture Resistance MIL-STD-202, Method 106	Corona, 70,000 Ft (VRMS MIN) 250	Force to Engage and Disengage (In-Lbs MAX) 2.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	Center Contact Captivation		Contact Resistance (Milliohms MAX)	Axial (Lbs) N/A		Center Contact 3.0	Radial (In-Oz) N/A		Outer Contact 2.0	Cable Retention		Cable to Housing .05	Axial Force (Lbs) 30		RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670	Torque (In-Oz) 16		I.R.(Megohms MIN) 5,000	Weight (Grams) 1.8		HOUSING STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		GOLD PLATE PER MIL-G-45204	
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																	
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A	Temperature Rating -65°C to 165°C																																																	
Frequency Range (GHz) DC to 18.0	Fig. 310.1	Vibration MIL-STD-202, Method 204, Condition D																																																	
Volt Rating (VRMS MAX) @ Sea Level 335	Recommended Mating Torque 7 to 10 in-LBs	Shock MIL-STD-202, Method 213, Condition I																																																	
VSWR 1.07 + .008f(GHz)	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B,																																																	
Insertion Loss (dB MAX) .03 √f(GHz)	Insertion (MAX Lbs) N/A	Except High Temp 115°C																																																	
RF Leakage (dB MIN) -[90-f(GHz)]	Withdrawal (MIN Oz) N/A	Moisture Resistance MIL-STD-202, Method 106																																																	
Corona, 70,000 Ft (VRMS MIN) 250	Force to Engage and Disengage (In-Lbs MAX) 2.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	Center Contact Captivation																																																		
Contact Resistance (Milliohms MAX)	Axial (Lbs) N/A																																																		
Center Contact 3.0	Radial (In-Oz) N/A																																																		
Outer Contact 2.0	Cable Retention																																																		
Cable to Housing .05	Axial Force (Lbs) 30																																																		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670	Torque (In-Oz) 16																																																		
I.R.(Megohms MIN) 5,000	Weight (Grams) 1.8																																																		
COUPLING NUT STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		PASSIVATE PER QQ-P-35																																																	
DIELECTRIC PTFE FLUOROCARBON PER ASTM-D-1457		N/A																																																	
CENTER CONTACT BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204																																																	
RETAINING RING BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H		N/A																																																	
GASKET SILICONE RUBBER PER ZZ-R-765		N/A																																																	
COMPONENT		MATERIAL		FINISH																																															
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		DRAWN BY PATLAN DATE 3-10-98		M/A-COM a Division of AMP Incorporated 140 Fourth Avenue Waltham, MA 02154-7577																																															
CHECKED BY		APPD BY  4/3/98		AMP M/A-COM																																															
These drawings and specifications are the property of M/A-COM Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE 408-04920 (20-543) NO. A.P.		TITLE SMA STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT M39012/79-3101 CAT B																																															
		SIZE B		CODE IDENT NO. 26805																																															
		SCALE 6:1		2001-8101-92																																															
				REV 010																																															
				SHEET 1 OF 1																																															