

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	ECR-16-013297	24JUL2017	FL	SY

D

D

C


C

B

B


A

A

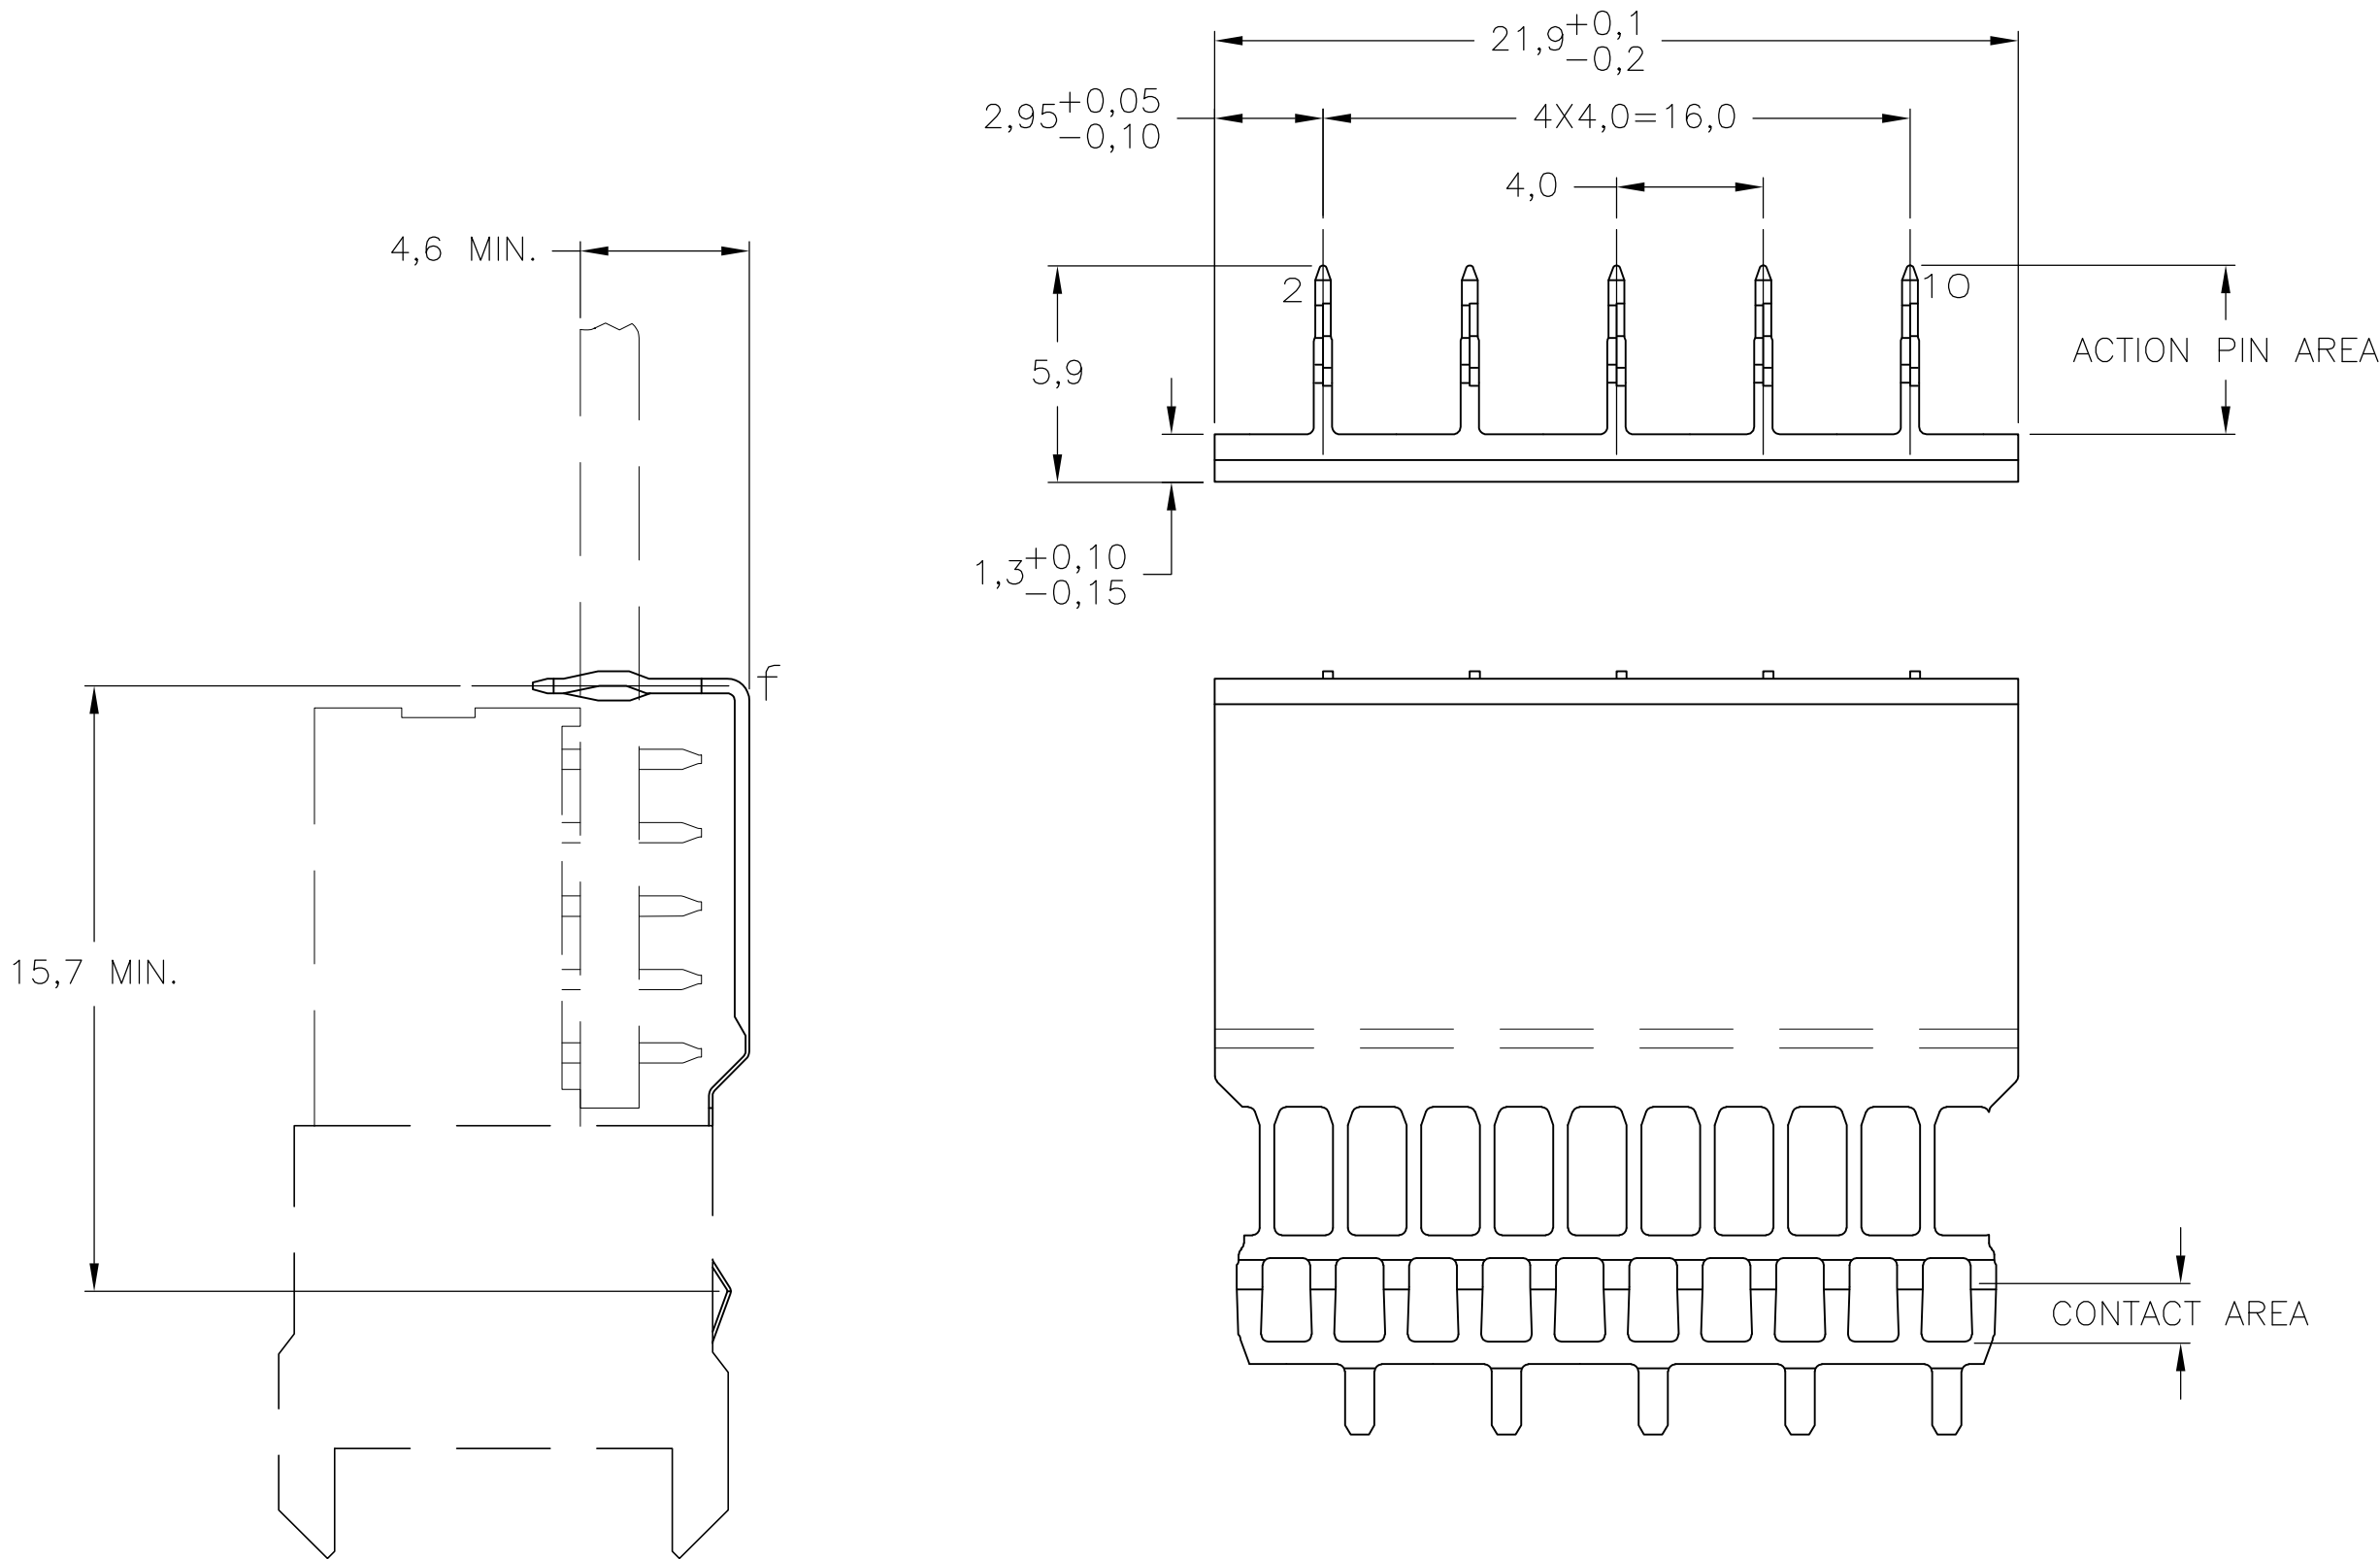

NOTES:


- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- ⚠ MATERIAL; PHOSPHORBRONZE.
- ⚠ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
- ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- 5 MAX. BOARD THICKNESS 3,5 mm.
- ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

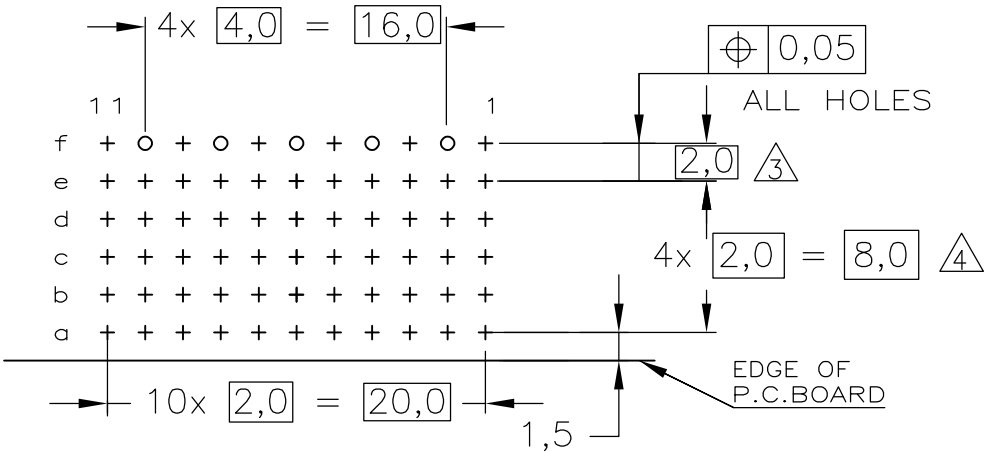

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

OBSOLETE	⚠ ⚠ ⚠	⚠	4-5352112-0
	⚠ ⚠ ⚠	⚠	5352112-9
	⚠ ⚠	⚠	5352112-2
FINISH		MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 18AUG04		 TE Connectivity			
DIMENSIONS: mm		CHK B.MOOIJ 25MAR05					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE C/M		
	0-PLC ± - ±0.2						
	1-PLC ± -						
	2-PLC ± -						
	3-PLC ± -						
MATERIAL -	FINISH -		APVD B.MOOIJ 25MAR05		DRAWING NO		
			PRODUCT SPEC		RESTRICTED TO		
			108-19082		-		
			APPLICATION SPEC		SIZE		
			114-19029		CAGE CODE		
		WEIGHT 0.000000		A2 00779		C=5352112	
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 of 1	
						REV E	