


REV.	DATE	ECR NO.	DESCRIPTION
A	01/03/04	XXXXXX	UPDATE DRAWING FORMAT
B	10/20/11	2244	CHANGE THE TOTAL LENGTH TO 22.13MM FROM 21.13MM

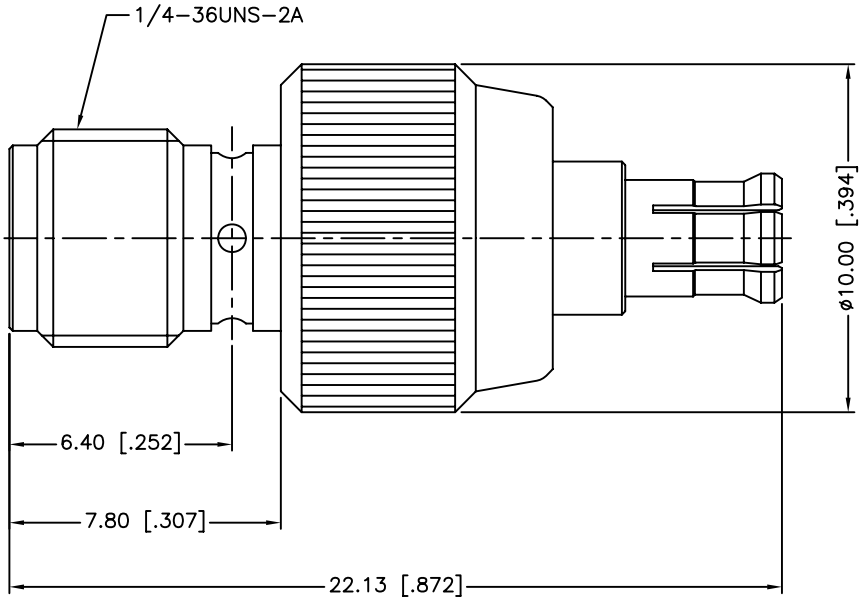

1. SEALING REQUIREMENT: IP-68 MUST WITHSTAND 3' DEPTH OF WATER FOR ONE HOUR WITHOUT ANY SIGNS OF LEAKAGE
2. MAX. PANEL THICKNESS= 6.8mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
						DRAWN	M.ZHANG		10/20/11								
						CHECKED											
4 CONTACT PIN						BER. COPPER	GOLD	1	ISSUED				PART DESCRIPTION SMA FEMALE TO MCX MALE ADAPTER BULKHEAD ADAPTOR (IP 68)				
3 INSULATOR						PTFE	NATURAL	1	SHEET		1 OF 1						
2 BODY						BER. COPPER	GOLD	1									
1 HOUSING						BRASS	GOLD	1	CAD FILE				PART NO. 242127				
DESCRIPTION					MATERIAL	FINISH	QTY	C:/CONNEX/242127.DWG									
								DWG. NO.		242127.DWG		REV.	B	SIZE	A	SCALE	NA