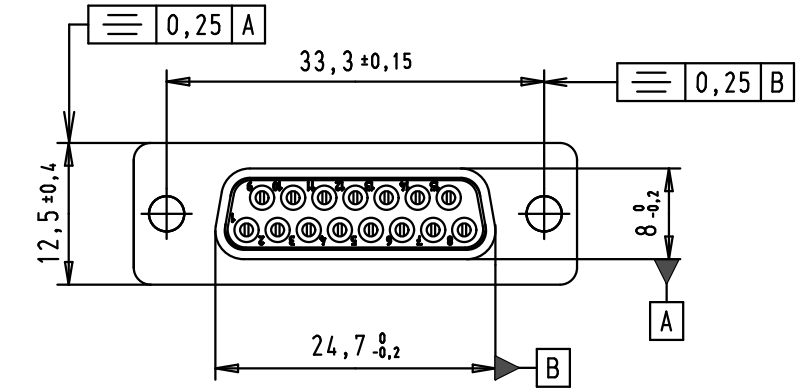

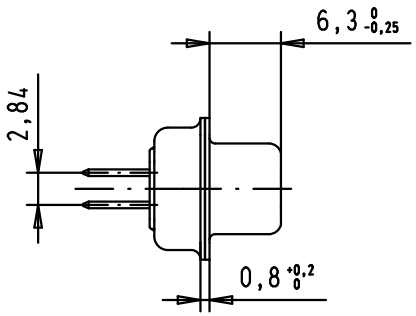

SPECIFICATION: C Filter

Performance level	PL2
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

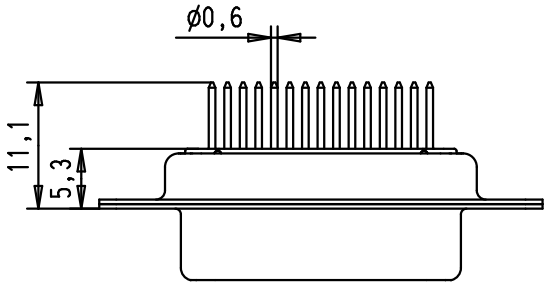

PCB Layout
Component side

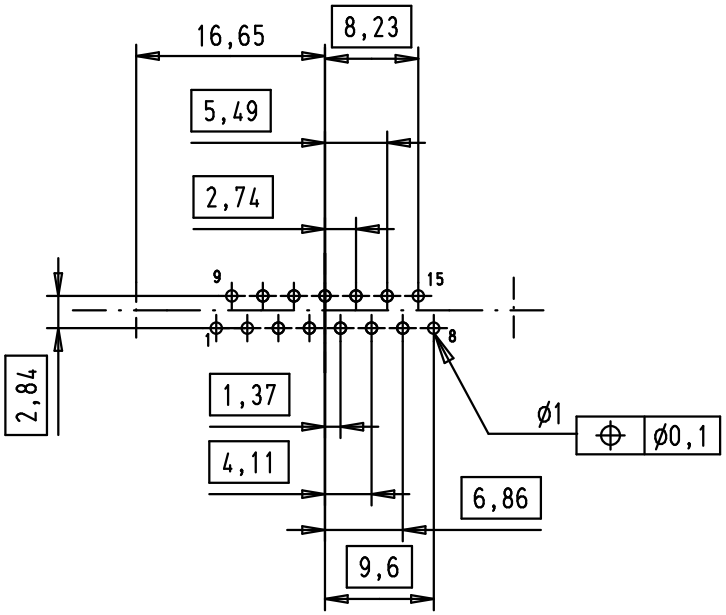

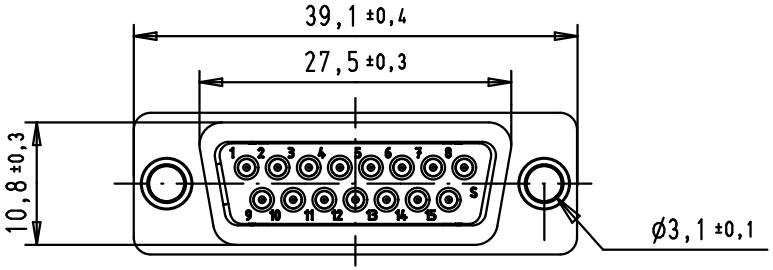

36283	09/12/11	SD
31570	07/11/03	AF
31058	8-JUL-02	CV
Mod.	Dat.	Name

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.	09/12/11	JB
Stand.		

All Dim. in mm
Orig. Size DIN A 4

D-Sub, female, straight, 15 Poles, with turned solder pin and hole

Ma?Mstab/ Scale: 1.5:1

HARTING EURL
F-95972 Paris

TB 09642127230

Sub.

Blatt/ Page 1/1