
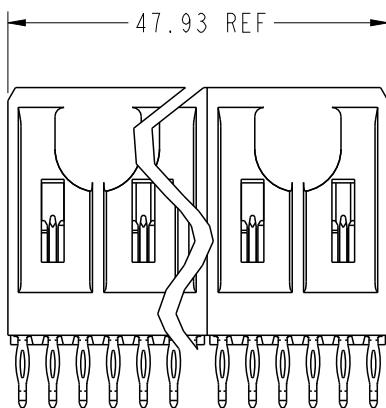
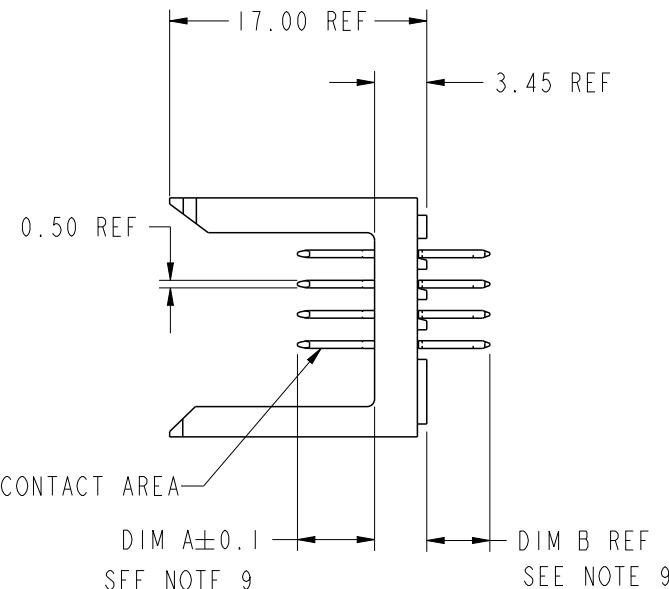


PRODUCT NUMBER
89075-XXX
OR
89075-XXXX
89075-XXYL
OR
89075-XYYLF

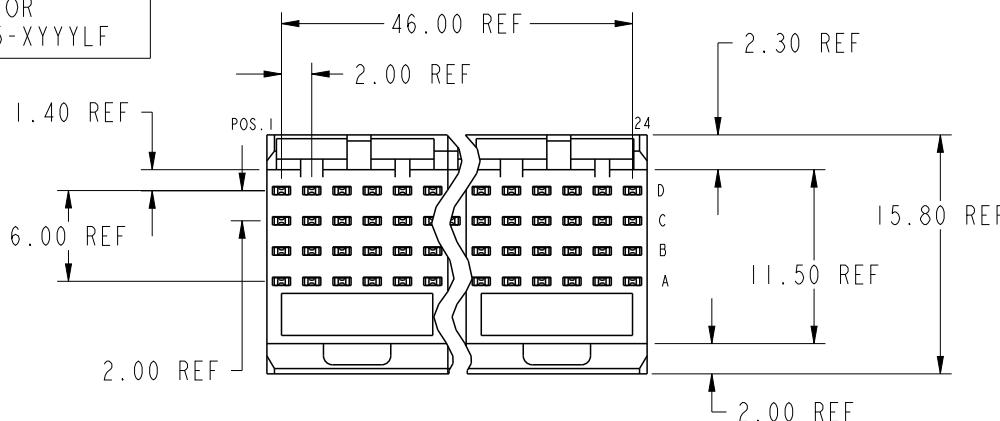

spec ref	*	dr	Terran Huang	2010/07/08	projection	size	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Andy Lu	2012/03/08	mm	A4	2:1
ASME Y14.5		chr	Thian-Zhao Lin	2012/03/12		ecn no	ELX-DG-010531-1
		appr	Pei-Ming Zheng	2012/03/12	product family	METRAL	rel level
surface 3.200 linear		0.X	±0.3	METRAL SIGNAL HEADER		Released	
		0.XX	±0.13	4 MOD, 4 ROW PRESS-FIT		89075	
		0.XXX	±0.051			rev CE	
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	dwg no	
				-	Product - Customer Drw		sheet 1 of 15

A

A

B

B


C

C

Copyright FCI.

D

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
10	5.75	17.00
11	6.50	17.00
12	7.25	17.00
13	8.25	4.30
14	8.25	13.60
19	8.00	4.30
22	5.00	12.10

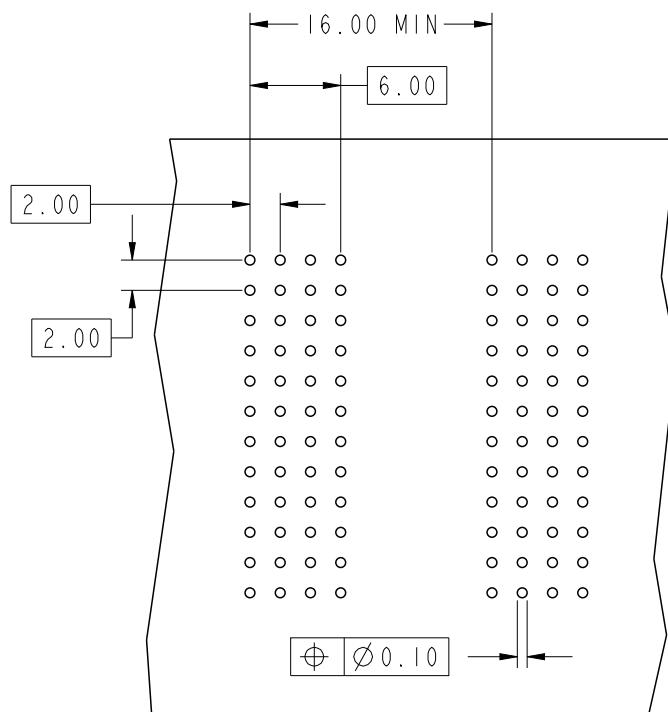

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE

SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

spec ref	*		dr	Terran Huang	2010/07/08	projection	size	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Andy Lu	2012/03/08	mm	A4	2:1
ASME Y14.5			chr	Thian-Zhao Lin	2012/03/12		ecn no	ELX-DG-010531-1
	surface	3.200 linear	appr	Pei-Ming Zheng	2012/03/12	product family	METRAL	rel level
	ASME Y14.5	0.X	±0.3					Released
		0.XX	±0.13					
		0.XXX	±0.051					
	ASME Y14.5	angular	0°	±2°				



METRAL SIGNAL HEADER
4 MOD, 4 ROW PRESS-FIT

www.fci.com

cat. no. - Product - Customer Drw

dwg no. 89075

rev CE

A

A

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X01 SEE NOTE II LEAD FREE OPTION	D	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3
	C	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3
	B	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3
	A	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X02 SEE NOTE II LEAD FREE OPTION	D	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
	C	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
	B	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
	A	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

B

B

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X03 SEE NOTE II LEAD FREE OPTION	D	6	6	5	6	6	5	6	6	5	6	6	5	11	11	5	5	5	5	5	5	5	5	5	5
	C	6	6	5	6	6	5	6	6	5	6	6	5	11	11	5	5	5	5	5	5	5	5	5	5
	B	6	6	5	6	6	5	6	6	5	6	6	5	11	11	5	5	5	5	5	5	5	5	5	5
	A	6	6	5	6	6	5	6	6	5	6	6	5	11	11	5	5	5	5	5	5	5	5	5	5

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X04 SEE NOTE II LEAD FREE OPTION	D	6	6	6	6	6	3	2	2	2	3	2	2	2	2	2	2	2	2	2	2	3	3	3	3
	C	6	6	6	6	6	3	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	3	3	3
	B	6	6	6	6	6	3	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	3	3	3
	A	6	6	6	6	6	3	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	3	3	3

C

C

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X05 SEE NOTE II LEAD FREE OPTION	D	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

D

D

spec ref	*	dr	Terran Huang	2010/07/08	projection	mm	size	A4	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Andy Lu	2012/03/08			ecn no	ELX-DG-010531-1	
ASME Y14.5		chr	Thian-Zhao Lin	2012/03/12			rel level	Released	
		appr	Pei-Ming Zheng	2012/03/12	product family	METRAL	dwg	89075	rev
surface	3.200 linear	e	METRAL SIGNAL HEADER						CE
	0.X	+	+ 4 MOD, 4 ROW PRESS-FIT						
	0.XX	+							
	0.XXX	+							
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 3 of 15	



Copyright FCI.

		CONTACT CODE MOD. 1		MOD. 2		MOD. 3		MOD. 4				CONTACT CODE MOD. 1		MOD. 2		MOD. 3		MOD. 4																																									
METRAL P/N		ROW		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	METRAL P/N		ROW		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24				
SEE NOTE II LEAD FREE OPTION	89075-X11	D	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	SEE NOTE II LEAD FREE OPTION	89075-X16	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2			
		C	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22			C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2				
		B	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22			B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2				
		A	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22			A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2				
SEE NOTE II LEAD FREE OPTION	89075-X12	D	3	1	1	1	1	1	1	1	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	SEE NOTE II LEAD FREE OPTION	89075-X17	D	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	8	8	8	8	8	8	8	8	8		
		C	3	1	1	1	1	1	1	1	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			C	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	8	8	8	8	8	8	8				
		B	3	1	1	1	1	1	1	1	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			B	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	8	8	8	8	8	8				
		A	3	1	1	1	1	1	1	1	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			A	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	8	8	8	8	8	8				
SEE NOTE II LEAD FREE OPTION	89075-X13	D	3	3	2	2	1	1	1	1	1	3	3	2	3	3	1	1	1	1	1	1	1	1	1	1	1	3	SEE NOTE II LEAD FREE OPTION	89075-X18	D	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	
		C	3	3	2	2	1	1	1	1	1	3	3	2	3	3	1	1	1	1	1	1	1	1	1	1	1	3			C	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3		
		B	3	3	2	2	1	1	1	1	1	3	3	2	3	3	1	1	1	1	1	1	1	1	1	1	1	3			B	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	
		A	3	3	2	2	1	1	1	1	1	3	3	2	3	3	1	1	1	1	1	1	1	1	1	1	1	3			A	4	3	4	1	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	
SEE NOTE II LEAD FREE OPTION	89075-X14	D	19	3	4	4	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	SEE NOTE II LEAD FREE OPTION	89075-X19	D	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4
		C	19	3	4	4	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2			C	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	
		B	19	3	4	4	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2			B	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	
		A	19	3	4	4	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2			A	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	
SEE NOTE II LEAD FREE OPTION	89075-X15	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	2	19		SEE NOTE II LEAD FREE OPTION	89075-X20	D	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	3	3	3	3	3	3	3	
		C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	2	2	2	2	2	2	2	2	19				C	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	3	3	3	3	3		
		B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	19			B	4	3	4	2	2	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	3	3	3	3	3		
		A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	19			A	4	3	4	1	4	3	3	3	3	3	3	3	3	3	3	3	2	2	3	3	3	3	3	3	3	3		
spec ref				TOLERANCES UNLESS OTHERWISE SPECIFIED								dr		Terran Huang		2010/07/08		projection		mm		size		A4		scale																																	
tolerance std				ASME Y14.5								eng		Andy Lu		2012/03/08		e		METRAL SIGNAL HEADER		dwg		ecn no		ELX-DG-010531-1																																	
surface				3.200 linear		0.X		±0.3		0.XX		±0.13		0.XXX		±0.051		+/-		4 MOD, 4 ROW PRESS-FIT		cat. no.		-		Product - Customer Drw		sheet 4 of 15																															
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		rel level		Released		rev		CE		89075																																	



Copyright FCI.

A

2

3

4

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4											
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
89075-X21 SEE NOTE II LEAD FREE OPTION	D	3	3	2	2	2	2	2	2	2	4	4	4	4	4	4	4	4	4	4	4	3	3	3	3
	C	3	3	2	2	2	2	2	2	2	4	4	4	4	4	4	4	4	4	4	4	4	3	3	3
	B	3	3	2	2	2	2	2	2	2	4	4	4	4	4	4	4	4	4	4	4	4	3	3	3
	A	3	3	2	2	2	2	2	2	2	4	4	4	4	4	4	4	4	4	4	4	4	3	3	3

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X26 SEE NOTE II LEAD FREE OPTION	D	2	2	3	2	2	2	2	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	3	2	2	2	2	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	3	2	2	2	2	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	3	2	2	2	2	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X22 SEE NOTE II LEAD FREE OPTION	D	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4	4
	C	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4
	B	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4
	A	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X23 SEE NOTE II LEAD FREE OPTION	D	1	1	1	3	3	3	3	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	1	1	1	3	3	3	3	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	1	1	1	3	3	3	3	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	1	1	1	3	3	3	3	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X24 SEE NOTE II LEAD FREE OPTION	D	2	2	3	2	3	2	3	2	1	1	2	2	2	1	1	1	1	1	1	1	1	1	2	2	2
	C	2	2	3	2	3	2	3	2	1	1	2	2	2	2	1	1	1	1	1	1	1	1	2	2	2
	B	2	2	3	2	3	2	3	2	1	1	2	2	2	2	1	1	1	1	1	1	1	1	2	2	2
	A	2	2	3	2	3	2	3	2	1	1	2	2	2	2	1	1	1	1	1	1	1	1	2	2	2

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2			MOD. 3			MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X25 SEE NOTE II LEAD FREE OPTION	D	2	2	2	1	1	3	1	1	1	1	1	1	1	2	2	2	2	1	1	3	2	2	2	2	2
	C	2	2	2	1	1	3	1	1	1	1	1	1	1	1	2	2	2	2	1	1	3	2	2	2	2
	B	2	2	2	1	1	3	1	1	1	1	1	1	1	1	2	2	2	2	1	1	3	2	2	2	2
	A	2	2	2	1	1	3	1	1	1	1	1	1	1	1	2	2	2	2	1	1	3	2	2	2	2

spec ref	tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		dr	eng	chr	appr	cat. no.	product family	projection	size	scale
		ASME Y14.5	ASME Y14.5									
				3.2	0.0	linear	Pei-Ming Zheng		METRAL SIGNAL HEADER	mm	A4	2:1
				0.0	0°	±2°			4 MOD, 4 ROW PRESS-FIT	dwg	89075	CE

A

A

METRAL P/N		CONTACT CODE MOD. 1				MOD. 2				MOD. 3				MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X31 SEE NOTE II LEAD FREE OPTION	D	4	3	4	2	2	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	C	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	B	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	A	4	3	4	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N		CONTACT CODE MOD. 1				MOD. 2				MOD. 3				MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X32 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	1	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	1	2	2	2

B

B

METRAL P/N		CONTACT CODE MOD. 1				MOD. 2				MOD. 3				MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X33 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N		CONTACT CODE MOD. 1				MOD. 2				MOD. 3				MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X34 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

C

C

METRAL P/N		CONTACT CODE MOD. 1				MOD. 2				MOD. 3				MOD. 4												
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X35 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

D

D

spec ref	*	dr	Terran Huang	2010/07/08	projection	mm	size	A4	scale
tolerance std	ASME Y14.5	eng	Andy Lu	2012/03/08	ecn no			2 : 1	ELX-DG-010531-1
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Thian-Zhao Lin	2012/03/12	product family	METRAL	rel level	Released	
surface 3.200 linear		appr	Pei-Ming Zheng	2012/03/12	dwg				CE
ASME Y14.5 angular		cat. no.	-	Product - Customer Drw					sheet 6 of 15
www.fci.com									

ProjE File : REV C - 2009-06-09

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X41 SEE NOTE II LEAD FREE OPTION	D	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	4	3	3		
	C	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	
	B	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	
	A	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X46 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X42 SEE NOTE II LEAD FREE OPTION	D	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	6	8	3	2	3	2	4
	C	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	6	8	3	2	3	2	4
	B	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	6	8	3	2	3	2	4
	A	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	6	8	3	2	3	2	4

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X43 SEE NOTE II LEAD FREE OPTION	D	3	3	3	3	4	2	2	3	3	3	3	3	3	2	2	2	2	4	3	3	4	4		
	C	3	3	3	3	3	4	2	2	3	3	3	3	3	3	2	2	2	2	4	3	3	4	4	
	B	3	3	3	3	3	4	2	2	3	3	3	3	3	3	2	2	2	2	4	3	3	4	4	
	A	3	3	3	3	3	4	2	2	3	3	3	3	3	3	2	2	2	2	4	3	3	4	4	

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X44 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X45 SEE NOTE II LEAD FREE OPTION	D	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8
	C	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8
	B	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8
	A	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8

surface	ASME Y14.5	3.200 linear	0.X	±0.3	ASME Y14.5	0.XX	±0.13	ASME Y14.5	0.XXX	±0.051	Angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 7 of 15	scale			
			0.X	±0.3		0.XX	±0.13		0.XXX	±0.051		0°	±2°			-						

FCI


Copyright FCI.

A

B

C

D

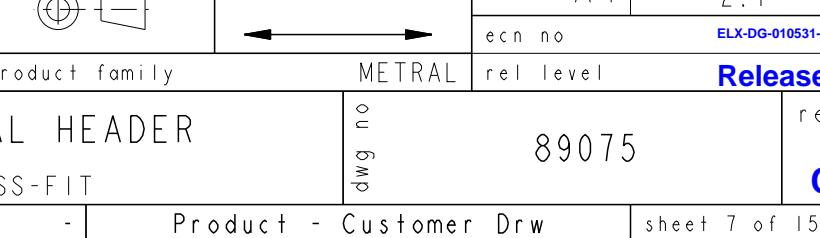

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X51 SEE NOTE II LEAD FREE OPTION	D	3	3	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	C	3	3	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	B	3	3	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	A	3	3	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X52 SEE NOTE II LEAD FREE OPTION	D	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	7	7	7	7
	C	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	7	7	7	7
	B	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	7	7	7	7
	A	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	7	22	7	7

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X53 SEE NOTE II LEAD FREE OPTION	D	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	C	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	B	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	A	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1	3	3	3	3	3

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X54 SEE NOTE II LEAD FREE OPTION	D	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1	3	3	3	3	3
	C	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	B	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	A	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	19	19	19	19	19	19

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X55 SEE NOTE II LEAD FREE OPTION	D	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	3
	C	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	B	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	A	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	19	19	19	19	19

METRAL P/N		CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4										
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
ASME Y14.5 SEE NOTE II LEAD FREE OPTION	D	3	2	0	0	linear		0.X		±0.3																
	C	3	2	0	0	linear		0.XX		±0.13																
	B	3	2	0	0	linear		0.XXX		±0.051																
	A	3	2	0	0	angular		0°		±2°																

A

A

B

B

C

C

D

D

spec ref

tolerance std

ASME Y14.5

surface

ASME Y14.5

* TOLERANCES UNLESS
OTHERWISE SPECIFIED

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4									
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X61	D	2	1	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	4	3	3		
		C	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	
		B	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	
		A	2	2	3	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3	

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4											
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
SEE NOTE II LEAD FREE OPTION	89075-X66	D	2	2	2	2	2	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	3	
		C	2	2	2	2	2	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	3
		B	2	2	2	2	2	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	3
		A	2	2	2	2	2	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4									
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X62	D	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	3	3	2	2	2	2	2	
		C	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	3	3	2	2	2	2	2	
		B	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	3	3	2	2	2	2	2	
		A	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	3	3	2	2	2	2	2	

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4									
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X63	D	3	3	3	3	4	2	2	3	3	3	3	3	2	3	2	2	4	3	3	4	4			
		C	3	3	3	3	4	2	2	3	3	3	3	3	2	3	2	2	4	3	3	4	4			
		B	3	3	3	3	4	2	2	3	3	3	3	3	3	2	3	2	2	4	3	3	4	4		
		A	3	3	3	3	4	2	2	3	3	3	3	3	3	2	3	2	2	4	3	3	4	4		

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4									
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X64	D	3	3	2	2	2	2	2	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	
		C	3	3	2	2	2	2	2	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	
		B	3	3	2	2	2	2	2	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	
		A	3	3	2	2	2	2	2	2	2	2	2	2	2	4	3	4	2	2	3	3	3	3	3	

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4									
		ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X65	D	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	7	7			
		C	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	7	7		
		B	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	7	7		
		A	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	8	8	7	7	

spec ref	* TOLERANCES UNLESS OTHERWISE SPECIFIED	ASME Y14.5	0.X					±0.3					0.XX					±0.13					0.XXX				
			surface	3.2	00	linear	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 9 of 15	dwg	proj	size	scale	ecn no	rel level	status	rev	CE					
ASME Y14.5																											

A

A

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2						MOD. 3						MOD. 4						
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X71 SEE NOTE II LEAD FREE OPTION	D	8	7	7	7	7	7	7	7	7	7	7	7	8	6	8	7	7	2	2	1	2	3	2	
	C	8	7	7	7	7	7	7	7	7	7	7	7	7	8	6	8	7	7	2	2	2	3	2	
	B	8	7	7	7	7	7	7	7	7	7	7	7	7	8	6	8	7	7	2	2	2	2	3	2
	A	8	7	7	7	7	7	7	7	7	7	7	7	7	8	6	8	7	7	2	2	2	2	3	2

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2						MOD. 3						MOD. 4						
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X72 SEE NOTE II LEAD FREE OPTION	D	8	7	7	7	7	7	7	7	7	7	7	7	7	8	7	8	7	7	3	3	2	3	3	3
	C	8	7	7	7	7	7	7	7	7	7	7	7	7	7	8	7	8	7	7	3	3	2	3	3
	B	8	7	7	7	7	7	7	7	7	7	7	7	7	7	8	7	8	7	7	3	3	2	3	3
	A	8	7	7	7	7	7	7	7	7	7	7	7	7	7	8	7	8	7	7	3	3	2	3	3

B

B

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2						MOD. 3						MOD. 4						
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X73 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4	4	2	2	3	3	
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2						MOD. 3						MOD. 4							
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
89075-X74 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	6	
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	6	
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	6	
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6		

C

C

METRAL P/N	CONTACT CODE MOD. 1						MOD. 2						MOD. 3						MOD. 4						
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
89075-X75 SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	3	3	3	4			
	C	2	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	3	1	4	3	3	3	3
	B	2	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	3	1	3	3	3	3	3
	A	2	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	3	1	3	3	3	3	3

D

D

surface	ASME Y14.5	spec ref	TOLERANCES UNLESS OTHERWISE SPECIFIED	dr		eng		chr		appr		projection		size		scale		
				3.2	0.00 linear	Andy Lu		Thian-Zhao Lin		Pei-Ming Zheng		cat. no.	Product - Customer Drw	rel level	Rev			
	ASME Y14.5			0.X	±0.3			0.XX	±0.13	0.XXX	±0.051		METRAL SIGNAL HEADER		89075	CE		
				0°	±2°													



Copyright FCI.

A

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2				MOD. 3				MOD. 4										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X81	D	3	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	3
		C	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3
		B	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3
		A	3	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	3

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2				MOD. 3				MOD. 4										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X82	D	2	2	2	2	2	2	3	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	3
		C	2	2	2	2	2	2	3	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	3
		B	2	2	2	2	2	2	3	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	3
		A	2	2	2	2	2	2	3	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	3

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2				MOD. 3				MOD. 4										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X83	D	4	2	4	3	3	3	3	3	3	3	3	3	3	4	4	3	3	4	4	4	4	4	4
		C	2	4	3	3	3	3	3	3	3	3	3	3	3	3	4	4	3	3	4	3	4	3	4
		B	3	3	3	3	3	3	3	3	3	3	3	3	3	2	4	3	3	4	4	4	3	4	3
		A	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	3	3	4	4	4	4	4

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2				MOD. 3				MOD. 4										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X84	D	12	10	12	11	11	11	11	11	11	11	11	12	12	11	11	12	12	12	12	12	12	12	12
		C	10	12	11	11	11	11	11	11	11	11	11	11	12	12	11	11	12	11	12	11	12	11	12
		B	11	11	11	11	11	11	11	11	11	11	11	11	12	11	11	12	12	12	12	11	12	11	12
		A	11	11	11	11	11	11	11	11	11	11	11	11	12	11	11	12	12	12	12	12	12	12	12

METRAL P/N		CONTACT CODE MOD. 1					MOD. 2				MOD. 3				MOD. 4										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	89075-X85	D	2	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2
		C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
		B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
		A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

spec ref	*	dr	Terran Huang	2010/07/08	projection	mm	size	A4	scale	2:1			
tolerance std	ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED				eng	Andy Lu	2012/03/08	ecn no	ELX-DG-010531-1			
surface		3.200	linear	0.X	±0.3	chr	Thian-Zhao Lin	2012/03/12	product family	METRAL	rel level	Released	CE
ASME Y14.5		angular	0°	±2°	appr	Pei-Ming Zheng	2012/03/12	dwg	89075			rev	
				www.fci.com	cat. no.	-	Product - Customer Drw				sheet 11 of 15		
ProjE File - REV C - 2009-06-09													



Copyright FCI.

A

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4									
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	D	2	3	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1	
	C	2	3	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1	
	B	2	3	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1
	A	2	3	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	1

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4									
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	4	2	2	4	2	2	4	2	2	4	2	2	2	4	2	2	2	4	2	2
	C	2	4	2	2	4	2	2	4	2	2	4	2	2	4	2	2	2	4	2	2	2	4	4	4
	B	2	4	2	2	4	2	2	4	2	2	4	2	2	4	2	2	2	4	2	2	2	4	2	2
	A	2	4	2	2	4	2	2	4	2	2	4	2	2	4	2	2	2	4	4	2	4	2	4	

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4									
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	D	4	4	4	2	2	4	4	4	4	2	2	4	2	2	2	2	2	2	2	2	2	2	4	
	C	2	2	4	4	4	4	2	2	4	2	2	4	2	2	2	2	2	4	2	2	2	4	2	2
	B	4	4	4	2	2	4	4	4	4	2	2	4	2	2	2	2	2	4	2	2	2	4	2	2
	A	2	2	2	4	4	4	2	2	4	2	2	4	2	2	2	2	2	4	2	2	2	4	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4									
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
SEE NOTE II LEAD FREE OPTION	D	2	2	2	2	2	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	3	2	2	2	2	2	2	2	3	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4								
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
SEE NOTE II LEAD FREE OPTION	D	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	3	3	
	C	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	3	3	
	B	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	3	3

spec ref	tolerance std	ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED		dr	Terran Huang	2010/07/08	eng	Andy Lu	2012/03/08	chr	Thian-Zhao Lin	2012/03/12	appr	Pei-Ming Zheng	2012/03/12	projection	mm	size	A4	scale
			0.X	±0.3																	
ASME Y14.5	3.200	linear	0.X	±0.3	0.XX	±0.13	0.XXX	±0.051	www.fci.com	cat. no.	-	Product - Customer Drw	dwg	89075	Released	CE	12	of 15			

3

4

A

B

C

A

C

D

METRAL P/N		CONTACT CODE MOD. 1		MOD. 2		MOD. 3		MOD. 4		MOD. 2		MOD. 3		MOD. 4		MOD. 2		MOD. 3		MOD. 4							
		ROW		1 2 3 4 5 6		7 8 9 10 11 12		13 14 15 16 17 18		19 20 21 22 23 24		ROW		1 2 3 4 5 6		7 8 9 10 11 12		13 14 15 16 17 18		19 20 21 22 23 24		ROW		1 2 3 4 5 6			
89075-X101		D		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		3 2 4 4		D		3 1 1 1 1 1		1 1 1 1 1 1		1 1 1 1 1 1		1 1 1 1 1 1		A		3 1 1 1 1 1	
SEE NOTE II LEAD FREE OPTION		C		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		3 2 4 4		C		3 1 1 1 1 1		1 1 1 1 1 1		1 1 1 1 1 1		B		3 1 1 1 1 1			
A		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		3 2 4 4		A		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2			
89075-X102		D		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
SEE NOTE II LEAD FREE OPTION		C		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
B		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
89075-X103		D		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
SEE NOTE II LEAD FREE OPTION		C		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
A		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
89075-X104		D		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
SEE NOTE II LEAD FREE OPTION		C		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
B		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2		2 2 2 2 2 2					
89075-X105		D		1 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3					
SEE NOTE II LEAD FREE OPTION		C		1 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3					
A		1 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3		3 3 3 3 3 3					
ASME Y14.5		3.200		linear		0.X		±0.3		0.XX		±0.13		0.XXX		±0.051		FCI		METRAL SIGNAL HEADER		dwg					
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 13 of 15		scale 2:1		status Released		Printed: Mar 12, 2012					

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4								
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
89075-XIII SEE NOTE III LEAD FREE OPTION	D	3	3	3	1	3	1	3	1	3	3	3	3	1	1	1	1	1	1	1	3	1	3	1
	C	3	3	3	1	3	1	3	1	3	3	3	3	3	1	1	1	1	1	1	1	1	1	3
	B	3	3	3	1	3	1	3	1	3	3	3	3	3	1	1	1	1	1	1	1	3	3	3
	A	3	3	3	1	3	1	3	1	3	3	3	3	3	3	1	1	1	1	1	1	3	1	3
METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2				MOD. 3				MOD. 4								
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
89075-XII2 SEE NOTE III LEAD FREE OPTION	D	3	-	3	-	3	-	3	-	3	3	-	3	-	3	-	3	-	3	-	3	-	3	-
	C	3	-	3	-	3	-	3	-	3	3	-	3	-	3	-	3	-	3	-	3	-	3	-
	B	3	-	3	-	3	-	3	-	3	3	-	3	-	3	-	3	-	3	-	3	-	3	-
	A	3	-	3	-	3	-	3	-	3	1	-	3	-	3	-	3	-	3	-	3	-	3	-

△E

A

A

B


B

C

C

Copyright FCI.

D

spec ref	*			dr	Terran Huang	2010/07/08	 METRAL SIGNAL HEADER 4 MOD, 4 ROW PRESS-FIT	mm product family METRAL rel level Released	size	A4	scale	2:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Andy Lu	2012/03/08	ecn no			ELX-DG-010531-1			
ASME Y14.5			chr	Thian-Zhao Lin	2012/03/12	dwg no						
			appr	Pei-Ming Zheng	2012/03/12	rev						
surface	3.200 linear	0.X	±0.3						89075			
		0.XX	±0.13				CE					
		0.XXX	±0.051									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw					
sheet 14 of 15												

PRODUCT NUMBER	
89075-XYY	NOTES:
OR	1. FOR DIM A AND B SEE SHEET 2 AND UP.
89075-YYYY	2. BODY MATERIAL: LIQUID CRYSTAL
89075-XYYLF	POLYMER 30 % GLASS.
OR	FLAME RETARDANT ACC. UL 94-V0.
89075-YYYYLF	

A

3. PIN MATERIAL:
PHOSPHOR BRONZE.
4. PLATING ON PRESS-FIT TAIL:
89075-XYY IS SnPb
89075-XXYL IS SN (LEAD FREE)
PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE.
5. PRODUCT MARKING:
PART NUMBER DESIGNATION & BATCH I.D.
6. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P"
WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXP OR XXXXX-XXXP,
XXXXX-XXXPLF OR XXXXX-XXXPPLF
7. PRODUCT SPECIFICATION GS-12-180
APPLICATION SPECIFICATION BUS-20-073
- (8) -A PLATING HAS Au FLASH IN PRESS FIT AREA (LEAD FREE).
- (9) AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
- (10) THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-NI--- OR (DRAWING NO.)-N5--- WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-NI--- AND (DRAWINGS NO.)-N5--- WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMIM 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.

- (11) FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX.
EXAMPLE: 89075-X0ILF

PLATING IN CONTACT AREA		
DASH NUMBER	PERFORMANCE LEVEL	NOTES
-AYY OR -AYYY	TELCORDIA CO	SEE NOTE 8
-NIYY OR -NIYYY	TELCORDIA CO (NXT)	-
-IYY OR -IYYY	TELCORDIA CO	-
-2YY OR -2YYY	TELECOM CLASS	-
-3YY OR -3YYY	IEC CLASS I	-
-N5YY OR -N5YYY	TELCORDIA UE (NXT)	-
-5YY OR -5YYY	TELCORDIA UE	-
-AYYLF OR -AYYYLF	TELCORDIA CO	SEE NOTE 10
-NIYLYF OR -NIYYYLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-IYLYF OR -IYYYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF OR -2YYYLF	TELECOM CLASS	SEE NOTE 10
-N5YYLF OR -N5YYYLF	TELCORDIA UE (NXT)	SEE NOTE 10
-5YYLF OR -5YYYLF	TELCORDIA UE	SEE NOTE 10

A

B

C

D

Copyright FCI.

spec ref	*	dr	Terran Huang	2010/07/08	projection	size	scale	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Andy Lu	2012/03/08		product family	A4	2:1
ASME Y14.5		chr	Thian-Zhao Lin	2012/03/12				
		appr	Pei-Ming Zheng	2012/03/12				
surface	3.200 linear	0.X	±0.3	e	METRAL SIGNAL HEADER	ecn no	ELX-DG-010531-1	
		0.XX	±0.13	+/-	4 MOD, 4 ROW PRESS-FIT	dwg	89075	
		0.XXX	±0.051	+			rev	
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		CE	
					-	Product - Customer Drw	sheet 15 of 15	