

Passive module - UM-2KS50/DI32/CS/SO180 - 2901013

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



32-channel digital input module with screw connection and redundant voltage supply. Suitable for Yokogawa ADV151 and ADV161 cards.

The figure shows the version with spring-cage connection

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 560085
GTIN	4046356560085

Technical data

Dimensions

Width	216 mm
Height	126 mm
Depth	65 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Note	Voltage monitoring on the module does not work in combination with upstream HESILED fuse terminal blocks with integrated LED display.
Max. perm. operating voltage	24 V DC $\pm 10\%$
Max. perm. current (per branch)	100 mA
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection

Passive module - UM-2KS50/DI32/CS/SO180 - 2901013

Technical data

Connection data for connection 1

Conductor cross section solid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 14
Number of positions	32

Connection data for connection 2

Connection name	Controller level
Connection method	Yokogawa KS-compatible
Torque	0.5 Nm
Number of connections	2
Number of positions	50
Note	Usable system cables: Phoenix Contact YUC50, Yokogawa AKB331

Standards and Regulations

Standards/regulations	DIN EN 50178
Rated surge voltage	0.5 kV
Degree of pollution	2
Overvoltage category	II


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Passive module - UM-2KS50/DI32/CS/SO180 - 2901013

Dimensional drawing

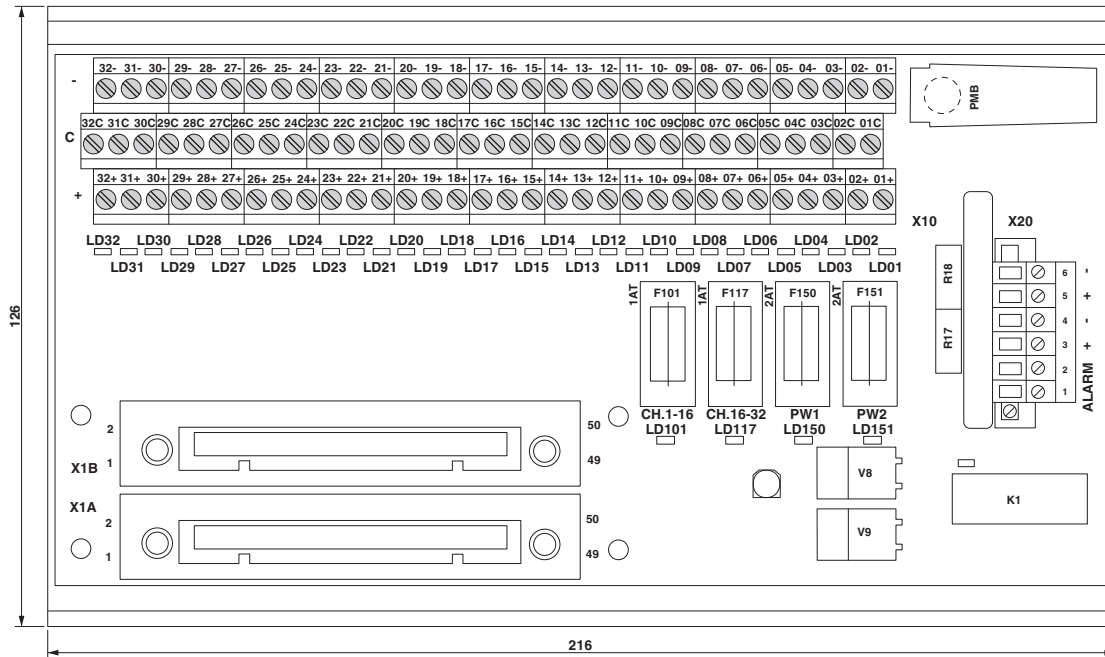

Passive module - UM-2KS50/DI32/CS/SO180 - 2901013

Circuit diagram

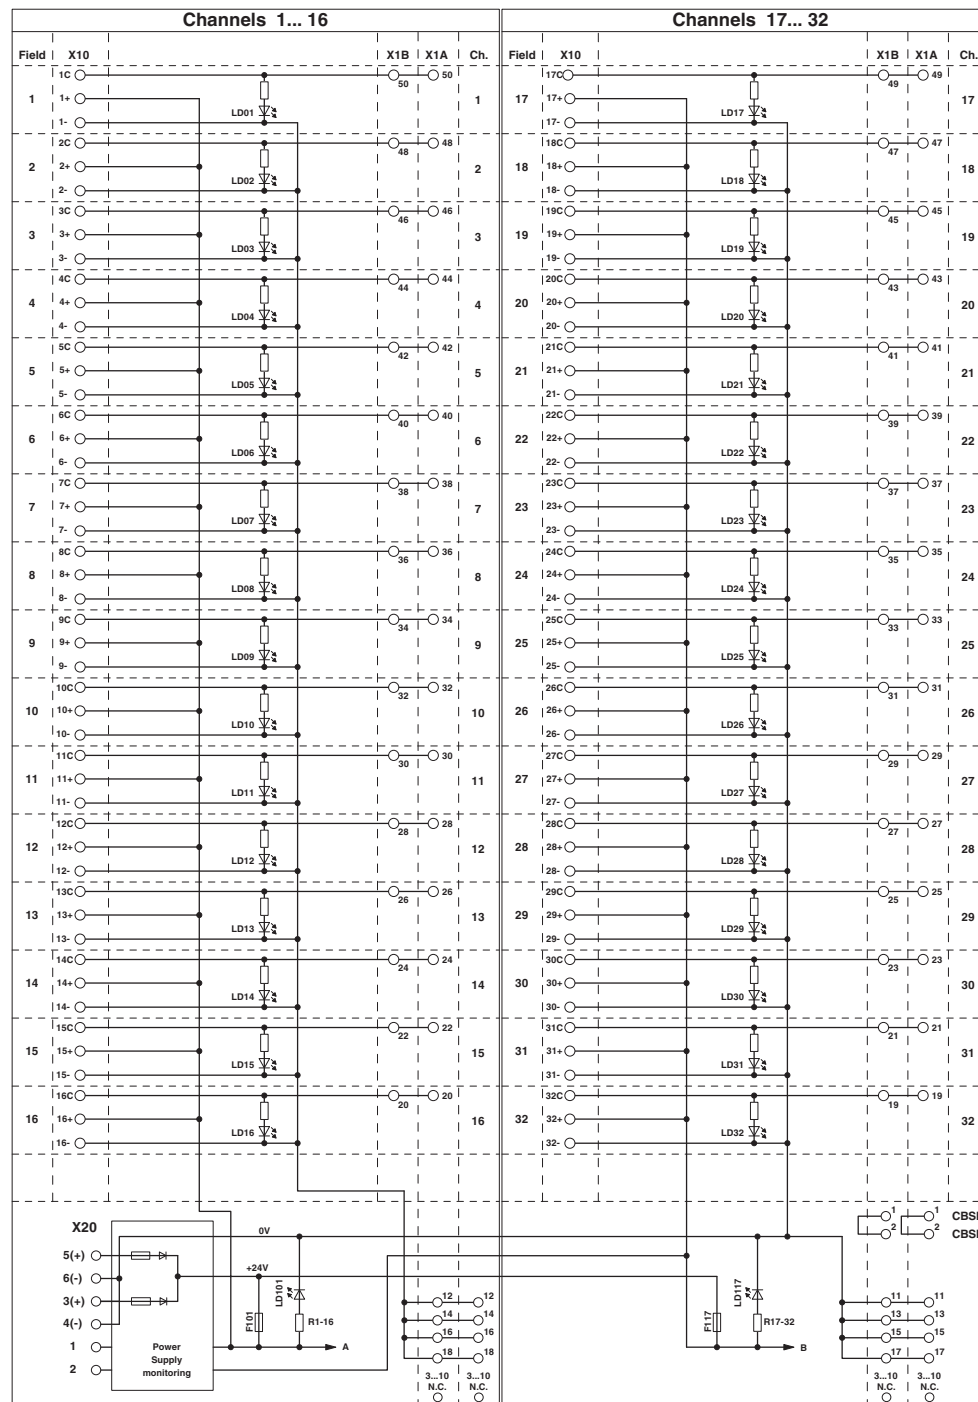

Passive module - UM-2KS50/DI32/CS/SO180 - 2901013

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>