
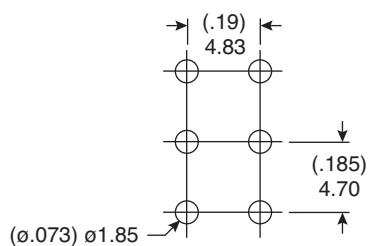


Dimensions: mm (in)

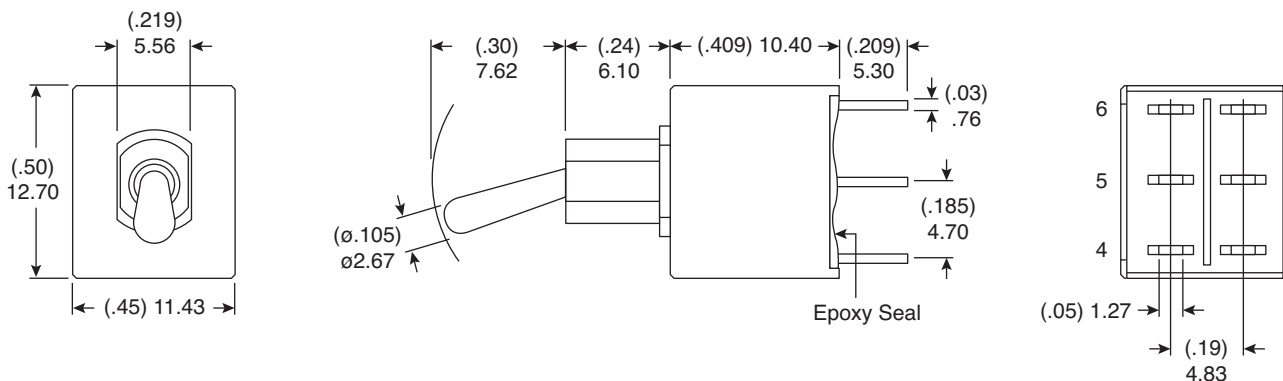

P. C. MOUNTING

Pos. 1	Pos. 2
ON	ON
2-3, 5-6	2-1, 5-4
2 Comm. — 1 — 3 5 Comm. — 4 — 6	2 Comm. — 1 — 3 5 Comm. — 4 — 6

SWITCH FUNCTION

Mechanical Specifications:

- Mechanical Life: 30,000 make-and-break cycles
- Operating Temperature: -30°C to 85°C

Electrical Specifications:

- Contact Resistance: 10m Ω max. initial @ 2-4 VDC 100mA
- Insulation Resistance: 1,000M Ω min.
- Dielectric Strength: 1,000 V RMS @ sea level
- Rating: 2A/250VAC
5A/120VAC or 28VDC

Soldering Process:

- Manual Soldering: Use soldering iron of 30 watts, controlled at 350°C approximately 5 sec. while applying solder.
- Wave Soldering: Recommended Soldering Temperature: 260 $\pm$ 5°C
Duration of Solder Immersion: 5 $\pm$ 1sec. (PCB is 1.6mm in thickness)

Note:

- RoHS Compliant
By Exemption

Sealed Miniature Toggle Switch
108-1AD1T2223-EVX

Mountain
Switch