


0.472 [12.00] MAX
CABLE DIAMETER

GROUNDING
SCREW
(PHILLIPS)




HOUSING
SCREW
(PHILLIPS)

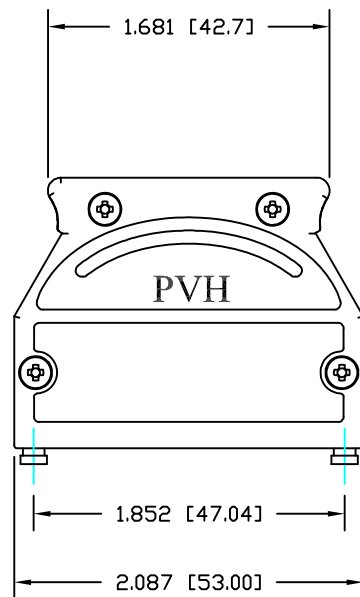

MOUNTING
SCREW
(PHILLIPS)




SLOT
COVER




CABLE DIAMETER

0.472 [12.00] MAX

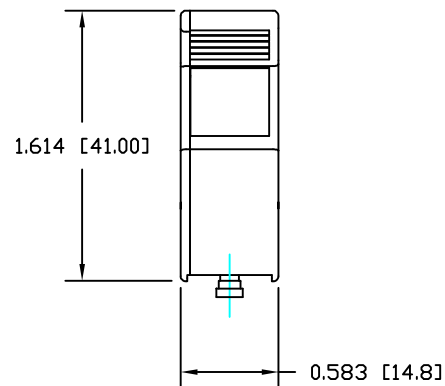

MATERIAL:

BACKSHELL: ZINC ALLOY
COVER: ZINC ALLOY
MOUNTING SCREWS: STEEL, NICKEL PLATED
HOUSING SCREWS: STEEL, ZINC PLATED
GROUNDING SCREW: STEEL, ZINC PLATED
CABLE SLOT COVER: ZINC ALLOY
OPERATING TEMP: -55°C TO +90°C

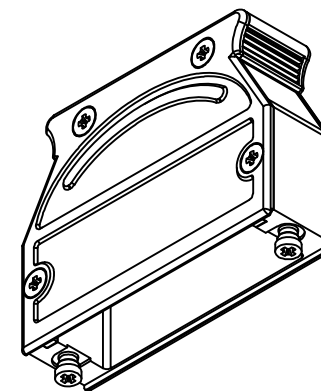

BACKSHELL KIT INCLUDES:

- (1) BACKSHELL
- (1) BACKSHELL COVER
- (2) MOUNTING SCREWS
- (4) HOUSING SCREWS
- (1) GROUNDING SCREW
- (2) CABLE SLOT COVER

****SEE PAGE 2 FOR CABLE CLAMPS**

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:

M. SIGMON

DATE:

01-14-14

CHECKED:

DATE:

SCALE:

N.T.S.

SHEET

OF

1

2













REV

1

DWG NO.

975M025-030R121

CABLE CLAMPS ORDERED SEPARATELY



P/N 955-09-SR-4-7
CABLE RANGE = 0.157 - 0.276

P/N 955-15-SR-7-10
CABLE RANGE = 0.276 - 0.394

P/N 955-25-SR-9-12
CABLE RANGE = 0.354 - 0.472

P/N 955-37-SR-11-14
CABLE RANGE = 0.433 - 0.551

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
08-16-16

CHECKED:

DATE:

NorComp

SCALE: N.T.S. SHEET 2 OF 2 REV 1

DWG NO. 975M025-030R121

RoHS COMPLIANT