


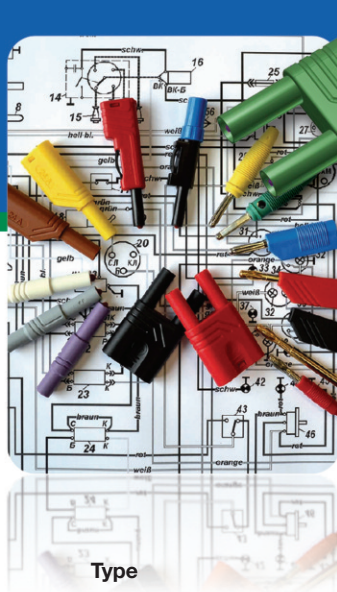

# Test Plugs 4 mm System

Type

## VQ 20

4mm spring loaded plug with 4mm cross hole, flexible insulation sleeve, nickel plated brass, screw terminal max. 1.5mm<sup>2</sup>.

Pin diameter

4 mm (0.157")

PART NO. / Housing color

- 930058100
- 930058101
- 930058102
- 930058103
- 930058104
- 930058107

## VQ 30

4mm spring loaded plug with 4mm cross hole, flexible insulation sleeve, nickel plated brass, solder terminal max. 2.5mm<sup>2</sup>.

4 mm (0.157")

- 930061100
- 930061101
- 930061102
- 930061103
- 930061104
- 930061107

### Technical Data

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Contact Type                    | spring loaded pin                      |
| Connection Type                 | screw terminal max. 1.5mm <sup>2</sup> |
| Voltage Rating                  | 30 VAC / 60 VDC                        |
| Measurement Category (IEC61010) | CAT I                                  |
| Current Rating*                 | 16A                                    |
| Contact Resistance              | 3 mOhm                                 |

### Material Specifications

|                |                     |
|----------------|---------------------|
| Plug           | nickel plated brass |
| Contact Spring | -                   |
| Housing        | PVC-P               |

### Environmental Conditions

|                   |                               |
|-------------------|-------------------------------|
| Temperature range | -25°C to +70°C (-13 to 158°F) |
|-------------------|-------------------------------|

### Flamability Rating

|         |   |
|---------|---|
| Housing | - |
|---------|---|

|                                         |  |
|-----------------------------------------|--|
| spring loaded pin                       |  |
| solder terminal max. 2.5mm <sup>2</sup> |  |
| 30 VAC / 60 VDC                         |  |
| CAT I                                   |  |
| 30A                                     |  |
| 3 mOhm                                  |  |



|                     |  |
|---------------------|--|
| nickel plated brass |  |
| -                   |  |
| PP                  |  |

|                                |  |
|--------------------------------|--|
| -25°C to +70 °C (-13 to 158°F) |  |
|--------------------------------|--|

|   |  |
|---|--|
| - |  |
|---|--|

### Drawing

Measurements are shown in millimeters.  
Multiply by 0.03937 to convert to inches.

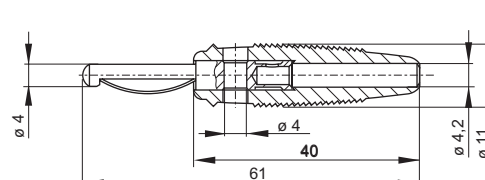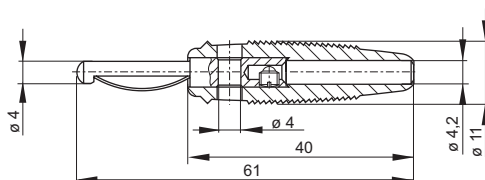

\* Please consider derating graph on page 80.