


| TITLE  | Drawing No.       | REV | PAGE   |
|--|-------------------|-----|--------|
| 34 AWG, Hook Up Wire,<br>PFA, 0.0015" Wall Thickness | <b>1000609901</b> | A   | 1 of 1 |

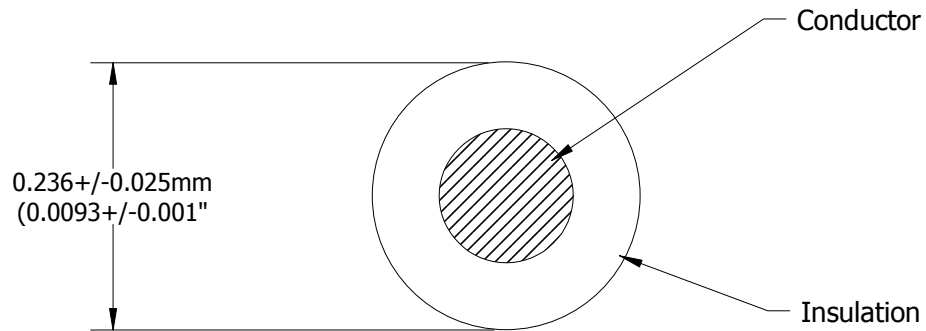

**NOTES**

Conductor: 34 AWG, Solid, Silver Plated Copper.

Insulation: PFA, 0.038mm (0.0015") Wall Thickness.

Colors: See Table.

Insulation Shall be Pin Hole Free.

| P/N        | COLOR  |
|------------|--------|
| 1000600089 | Brown  |
| 1000600090 | Red    |
| 1000600091 | Yellow |
| 1000600092 | Green  |
| 1000600093 | Blue   |
| 1000600095 | White  |
| 1000600094 | Black  |

|   |     |      |                              |       |         |
|---|-----|------|------------------------------|-------|---------|
| <small>This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.</small> | Rev | DCR  | Description                  | App'd | Date    |
|   | 8   | 1938 | New Template, Add WIP Column | RP    | 9/23/09 |
|   | A   | 4875 | Updated to New SAP PN.       | KP    | 3/28/16 |