


| TITLE | Drawing No. | REV | PAGE |
|--|-------------------|-----|--------|
| 34 AWG, Hook Up Wire, PFA, 0.0015" Wall Thickness | 1000609901 | A | 1 of 1 |

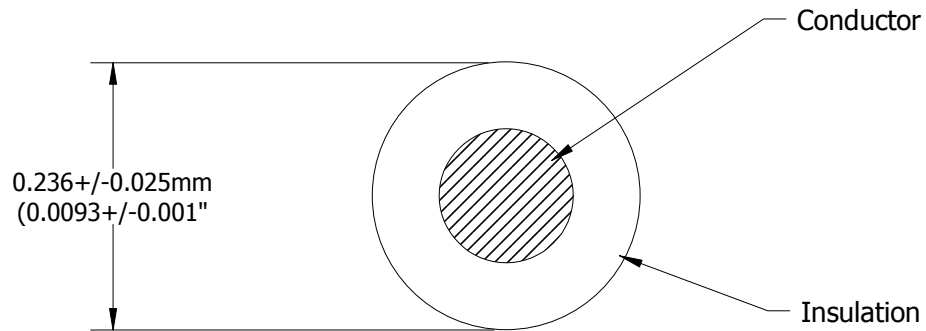

NOTES

Conductor: 34 AWG, Solid, Silver Plated Copper.

Insulation: PFA, 0.038mm (0.0015") Wall Thickness.

Colors: See Table.

Insulation Shall be Pin Hole Free.

| P/N | COLOR |
|------------|--------|
| 1000600089 | Brown |
| 1000600090 | Red |
| 1000600091 | Yellow |
| 1000600092 | Green |
| 1000600093 | Blue |
| 1000600095 | White |
| 1000600094 | Black |

| This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission. | Rev | DCR | Description | App'd | Date |
|--|-----|------|------------------------------|-------|---------|
| | 8 | 1938 | New Template, Add WIP Column | RP | 9/23/09 |
| | A | 4875 | Updated to New SAP PN. | KP | 3/28/16 |