

SIGN	DATE	DESCRIPTION	APPROVER
	3/30/09	Structure changed	JODY
	3/30/09	Temperature changed from -40~105°C to -40~115°C	JODY
	11/17/12	Change the screw plating specification	Jacky
	11/17/12	Change the dimensional tolerance	Jacky
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:

300 V, 20 A

WITHSTAND VOLTAGE:

AC 2000 V/Min

INSULATION RESISTANCE:

1000 MΩ OR MORE AT DC 500 V

OPERATING TEMPERATURE RANG:

 $\Delta -40\text{ }^{\circ}\text{C} \sim +115\text{ }^{\circ}\text{C}$

SCREW TORQUE VALUE:

12 Lb-In.

WIRE RANGE:

22 - 12 A

1) MOLDED PARTS:

POLYIMIDE 66, UL 94 V-0 BLACK

2) TERMINAL:

BRASS 0.8t Tin PLATED


3) TERMINAL SCREWS:

STEELE M3.5

APPROVAL:

Critical dimension: ∇_C

PART NO.:

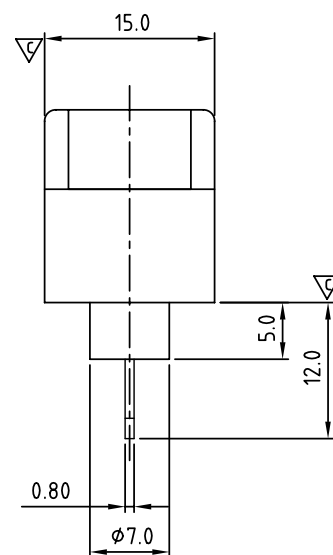

YK 606 xx 3 x x 00G

— G:RoHS compliant(lead<4%)
in copper alloy

— MARK

0: "@" MARK

1: "ANY" MARK

— TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F

 1: TERMINAL: G/F, SCREW: Zinc

2: TERMINAL: S_n, SCREW: G/F

3: TERMINAL: Sn, SCREW: Zinc

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-606 With Flange&Without Cover Series(4-30P)						
PART NO.	YK606xx3xx00G			DWG NO.	8YK0003-606		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacky 11/17 12	Jacky 11/17 12		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV.: D	X.XX ±0.10	
						X° ±1°	