

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.



USA



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△		ADAPTED FOR DATA TRANSLATION	Y.K	Y.E	07.03.20	△					. .
1	3	DIS-E-001346	Y.S	Y.E	07.03.20	△					. .
△					. .	△					. .

2 TABLE-1

APPLICABLE CABLE		
	INSULATION (ϕ mm)	0.90~1.00
	VINYL SHEATH (ϕ mm)	^{*(1)} ($\phi 5.0$)
	DRAIN WIRE	^{*(2)} (7/ $\phi 0.18$) AWG25

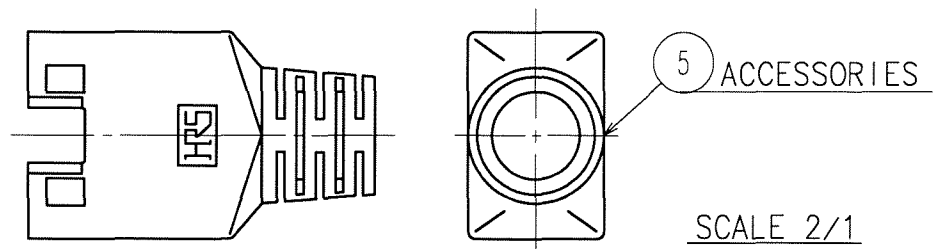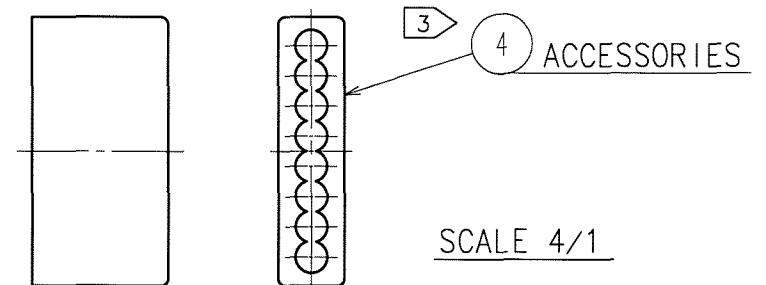

NOTES: 1.() INDICATES THE REFERENCE DIMENSIONS.

[2] APPLICABLE CABLE DIMENSIONS AS SHOWN IN TABLE-1.

*(1) THIS IS FOR REFERENCE.
(DIMENSION VARIES ACCORDING TO JACKET HARDNESS.)

*(2) THIS IS FOR REFERENCE.

[3] APPENDED PART SHALL BE USED TO ALIGN INDIVIDUAL WIRE. (CABLE SHALL BE ASSEMBLED WITH APPENDED PART INSERTED.)

2	PHOSPHOR BRONZE ①	CONTACT: GOLD PLATING 1.27μ m min TERMINAL: GOLD PLATING 0.03μ m min UNDER: NICKEL PLATING 2μ m min	5	POLYCARBONATE	LIGHT BEIGE UL94V-0
1	POLYCARBONATE	TRANSPARENCY UL94V-0	4	POLYCARBONATE	TRANSPARENCY UL94V-0
			3	BRASS ①	OVER: TIN REFLOW PLATING 1μ m min UNDER: COPPER PLATING 0.5μ m min
NO.		MATERIAL		FINISH, REMARKS	
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		S. Sato	S. Sato	H. Miwa	S. Kikuta
		'97.10.28	'97.10.28	97.10.28	97.10.29
DRAWING NO.		PART NO.			
EDC3-120683-		TM11APX-88P			
HRS		CL222-8008-0			
HIROSE ELECTRIC CO., LTD		1/1			