

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0879330816**
Status: **Active**
Overview: Slim-Grid Board-to-Board Connectors
Description: Slim-Grid Header, 8 Circuits, Surface Mount, Vertical, Unshrouded, 2.54µm Overall Tin (Sn) Plated, with Pick-and-Place Cap, Tube, Lead-Free

Documents:


[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification 879330001-000 \(PDF\)](#) [Product Literature \(PDF\)](#)
[Packaging Specification PK-89990-565-000 \(PDF\)](#)

General

Product Family	PCB Headers
Series	87933
Application	Board-to-Board, Signal
CURRENT-MAX-NUMERIC	1.4
Comments	4.3 Amps per Pole with only 1 contact powered up 1.4 Amps per Pole with max contacts powered up, 4.3 Amps per Pole with only 1 contact powered up 1.4 Amps per Pole with max contacts powered up
Overview	Slim-Grid Board-to-Board Connectors
PITCH-MATING-NUMERIC	1.27
Product Literature Order No	987651-5972
Product Name	Slim-Grid
UPC	191128087605

Physical

Breakaway	Yes
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	500
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.146/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	Pick and Place Cap
Shrouded	No
Temperature Range - Operating	-55° to +105°C

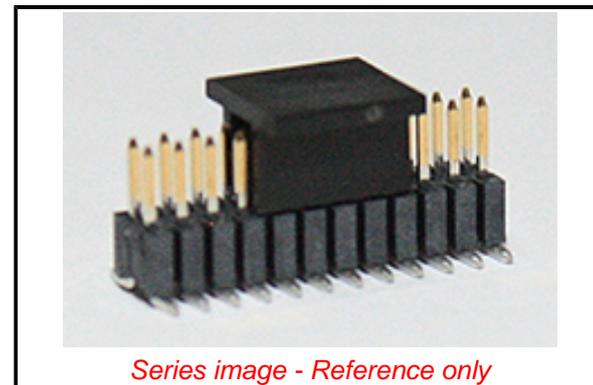

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

87933 Series

Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 1.4A
Voltage - Maximum 125V AC

Solder Process Data

Duration at Max. Process Temperature (seconds) 011
Lead-free Process Capability REFLOW
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Packaging Specification PK-89990-565-000
Product Specification 879330001-000
Sales Drawing SD-87933-0001-000

This document was generated on 09/26/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION