


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.

| PANDUIT PART NO. | BUNDLE DIA. MIN - MAX. | DIMENSIONS | | | | | MATERIAL | COLOR | WEIGHT | |
|------------------|------------------------|------------|-----|-----|-----|------|---------------------------|-------|--------|---------|
| | | 'A' | 'B' | 'C' | 'D' | 'E' | | | grams | 100 pcs |
| SICW04B08-...30 | 0 - 4.2 | 7.0 | 4.2 | 10 | 5 | 11.3 | HEAT STABILIZED NYLON 6/6 | BLACK | 25 | |

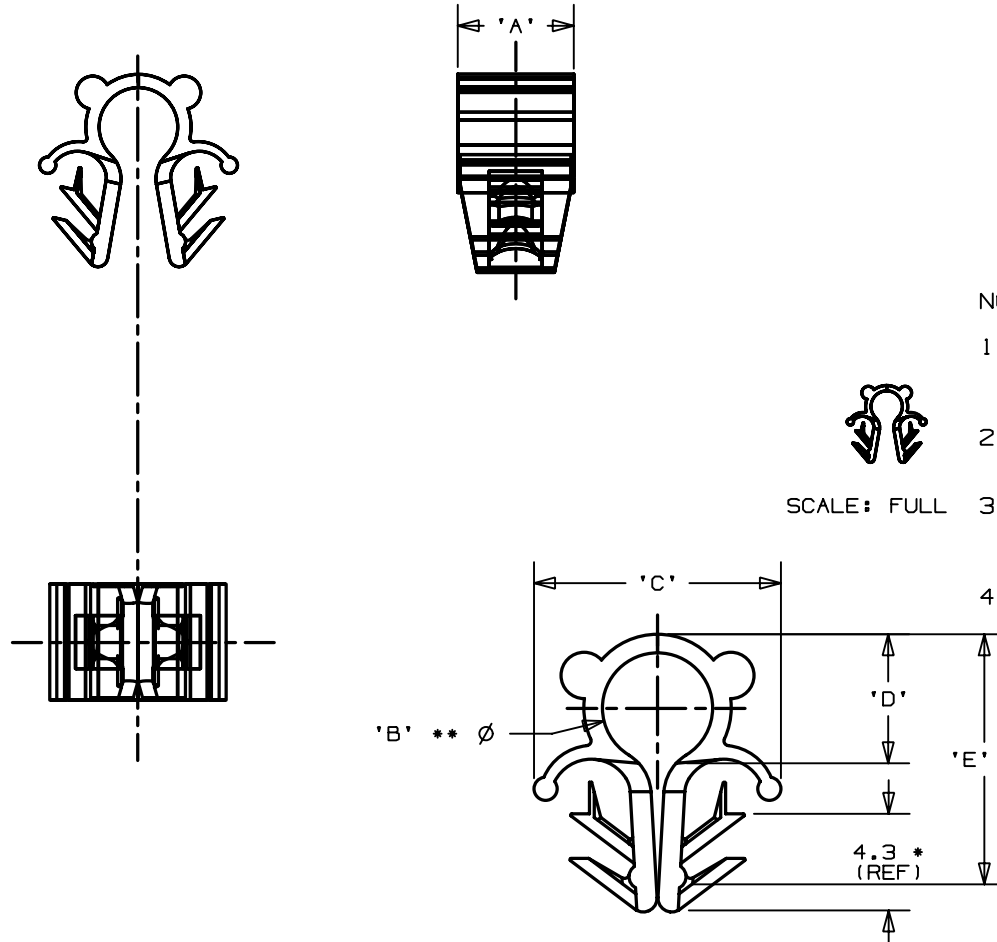

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
- (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
- APPLICATION SPECIFICATION:
HOLE DIAMETER: 6.3 - 6.7 mm
PANEL THICKNESS: 0.8 - 3.2 mm
- (**) DIMENSION REFERS TO THE PART WHEN IT IS CLOSED.

| | | | | | | | |
|---|---------|-----------|--|--------------------------|--|----------|--|
| CAD FILENAME/LAYERS | | | | G01932BL_PB_SICW04B08_02 | | | |
| PANDUIT CORP. | | | | TINLEY PARK, ILLINOIS | | | |
| SNAP IN CLIP | | | | | | | |
| Unless otherwise specified, all dimensions are metric tolerance; ±0.5mm | | | | | | | |
| DRAWN BY | MLD | MAT'L: | | SCALE | | NONE | |
| DATE | 5-21-88 | SEE TABLE | | DRAWING NO. | | GB1932BL | |
| CHK'D | | | | DWG SIZE | | A | |

| REV | DATE | BY | CHK | DESCRIPTION | ECN - R | CUST | SUP |
|-----|---------|-----|-----|---|----------|------|-----|
| 2 | 4/28/03 | JAD | | COMPLETELY REVISED, REMOVED GERMAN TEXT | GB1932BL | 2 | |