


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.

PANDUIT PART NO.	BUNDLE DIA. MIN - MAX.	DIMENSIONS					MATERIAL	COLOR	WEIGHT	
		'A'	'B'	'C'	'D'	'E'			grams	100 pcs
SICW04B08-...30	0 - 4.2	7.0	4.2	10	5	11.3	HEAT STABILIZED NYLON 6/6	BLACK	25	

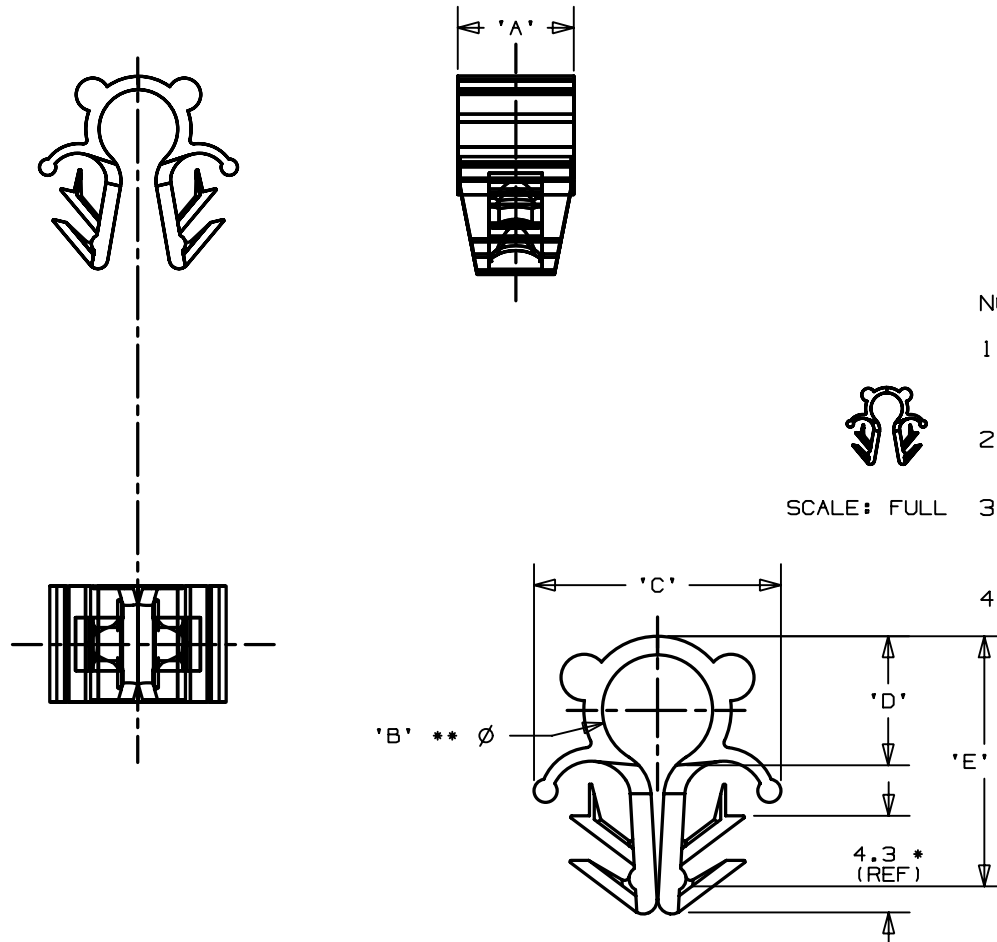

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
- (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
- APPLICATION SPECIFICATION:
HOLE DIAMETER: 6.3 - 6.7 mm
PANEL THICKNESS: 0.8 - 3.2 mm
- (**) DIMENSION REFERS TO THE PART WHEN IT IS CLOSED.



SCALE: FULL

CAD FILENAME/LAYERS				G01932BL_PB_SICW04B08_02			
PANDUIT CORP.				TINLEY PARK, ILLINOIS			
SNAP IN CLIP							
Unless otherwise specified, all dimensions are metric tolerance; ±0.5mm							
DRAWN BY	MLD	MAT'L:		SCALE		NONE	
DATE	5-21-88	SEE TABLE		DRAWING NO.		GB1932BL	
CHK'D				DWG SIZE		A	

2	4/28/03	JAD		COMPLETELY REVISED, REMOVED GERMAN TEXT	GB1932BL	2			
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		