



(b)

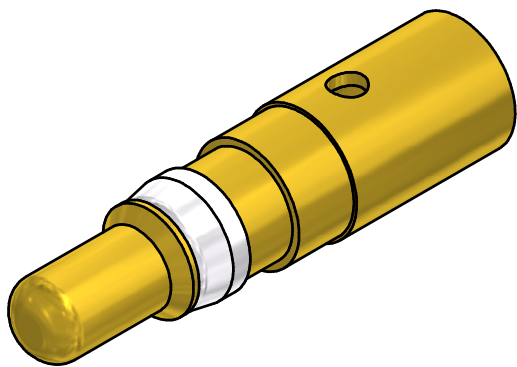

(b)



STRIPPING DIMENSIONS

NOTES:

- ### 1. MATERIAL: COPPER ALLOY

2. PLATING:

- ITEM 1: SEE TABLE

- ITEM 2: GOLD FLASH over NICKEL

- ITEM 3: NICKEL PLATED

3. CRIMPING: USE CRIMP TOOL 360X10409X

- WITH TOOL INSERT 360X20029X

- SELECTOR SETTINGS: 7 FOR AWG 8

- 6 FOR AWG 10

4. CURRENT RATING: PER UL 1977 / CSA - C22.2 No.182.3 (E228329)
-40A

- 50A only when used with cable AWG 8 and in combination with

- 2W2C connectors per following part number system:

- Cat. No. 302W2, 302W2 followed by C, followed by P or S,

- followed by XX, followed by 99, followed by A1 through A8, C1 through C6,

- D1 through D6, E1 through E6, F1 through F6, G1 through G4,

- H1 through H4, K1 through K4, L1 through L4, N1 through N4 or

- P1 through P4, W1, W2 or S9, followed by 0X or 0A to 0W

- when used in conjunction with the following contacts and

- pins 131A, 132A, 131C, 132C, 131J and 132J followed by 11049X

PLATING ITEM 1	PART-NO.
GOLD FLASH over NICKEL	131A11049X
min. 30μin HARD GOLD over min. 50μin NICKEL	131C11049X
min. 50μin HARD GOLD over min. 50μin NICKEL	131J11049X

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	finish: SEE NOTES				tolerance ISO 2768-m		 dim. in mm		scale: 5:1		
									material: SEE NOTES		
						date	name	title: HIGH POWER CONTACT MALE CRIMP VERSION AWG 8-10  D-SUB COMBINATION			
					drawn	23.03.98	Barcinski				
					appd.	23.03.98	Mickenbecker				
					norm						
	2 x c	Ä4283	17.04.12	K.H.	d-old			dwg no:		DIN-A3	
	4 x b	Ä3854	19.01.11	K.H.				13K1ID4A		sh: 1	
	a	Origin									
	rev.	description	date	name				part no:		SEE TABLE	

Directive 2002/95/EC RoHS compliant