



SPECIFICATIONS



1. CASE:
16 GA. (.059) CRS, TIN PLATED
2. RATED CURRENT:
3 x 150A
3. RATED VOLTAGE:
250/440VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO NEUTRAL: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
1.8mA @ 250VAC, 50Hz

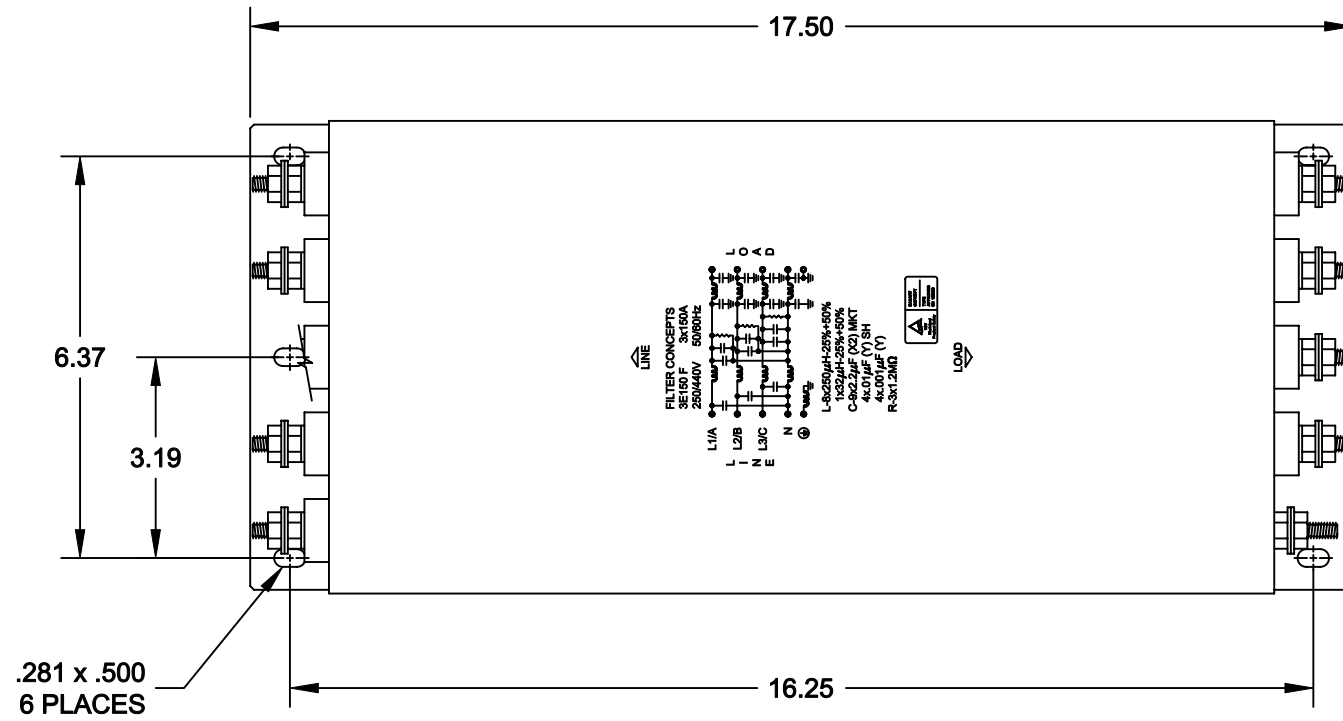

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09-30-02	LE
B	REVISED MARKING	03-13-03	LE
C	REVISED SCHEMATIC	01-17-05	LE

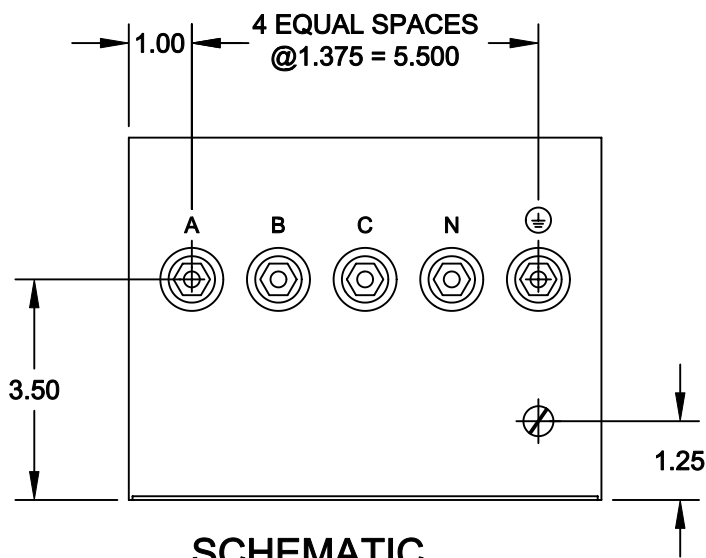

SCHMATIC

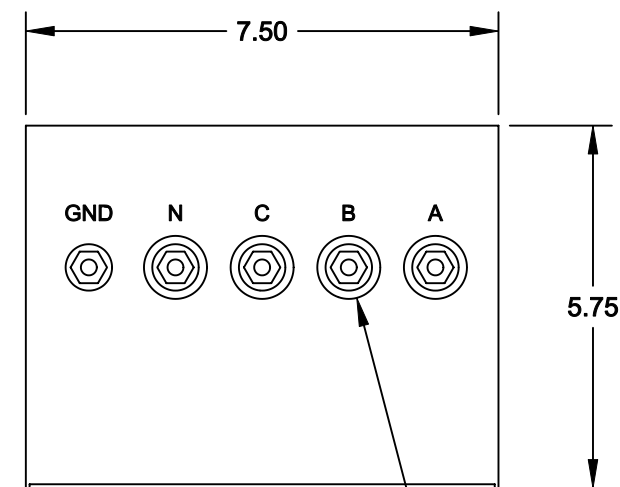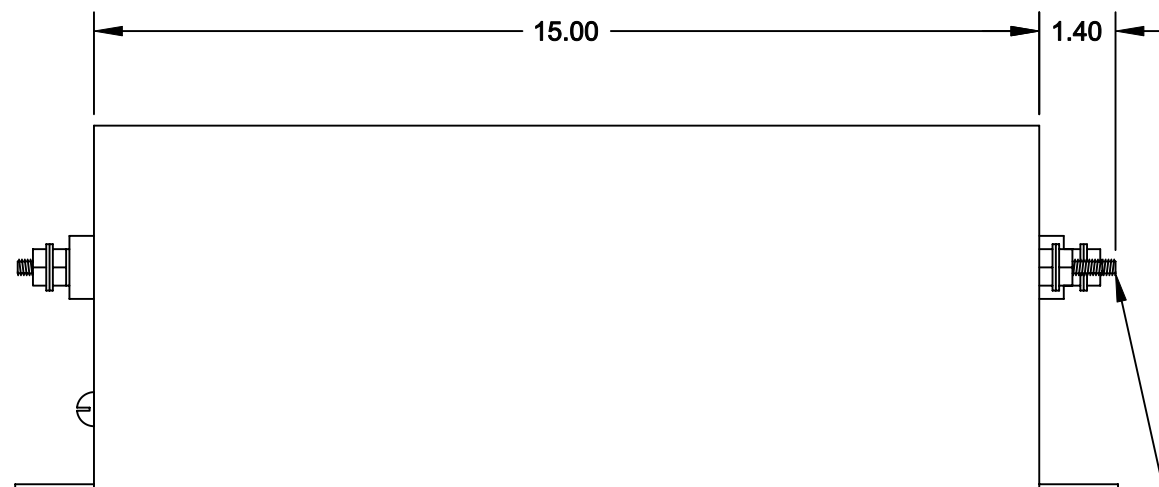


3/8-16 TERMINAL STUD
10 PLACES

1.015 DIA.
MAX.

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/N	25 db	35 db	50 db	50 db	40 db	50 db
L/G	1 db	23 db	55 db	60 db	60 db	60 db

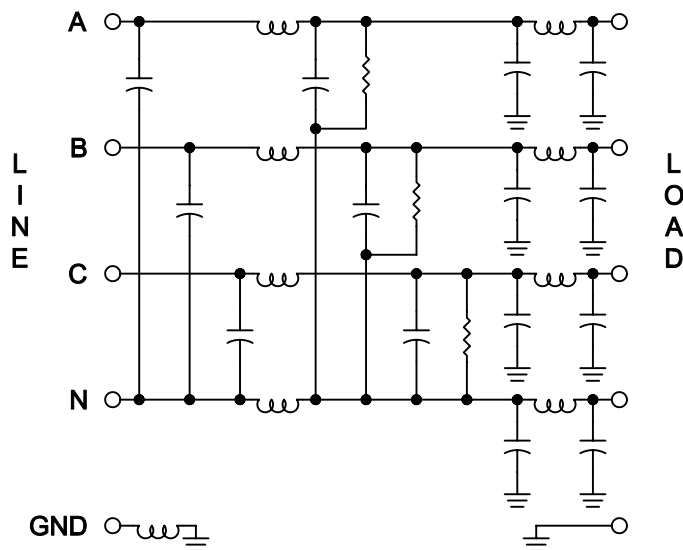

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010		CONTRACT NO.	
MATERIAL		APPROVALS	DATE
FINISH		DRAWN GIANG TRINH	09-26-02
NEXT ASSY		CHECKED DANNIEL VUONG	09-30-02
USED ON			
APPLICATION			

FILTER CONCEPTS INC.

APPLICATION DRAWING
3E150 F FILTER

SIZE B	CODE IDENT NO.	DRAWING NO. 7610
SCALE 1/3	SHEET 1 OF 1	