

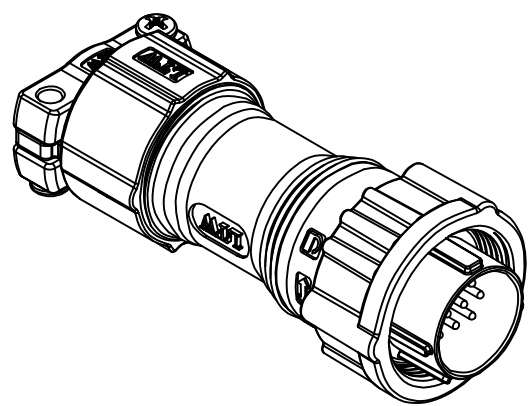

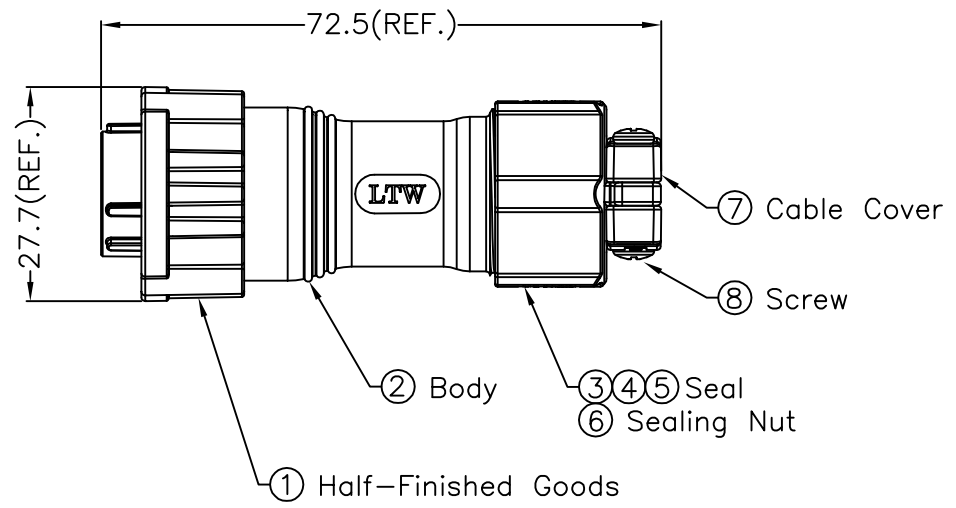



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/03/17	Jessie	Form Rev.01 To A
B	LE3-060089	2010/05/26	Jessie	Modify Note and Shell Plated



- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP68.
 - * IP68: 1M depth of water in 24 Hrs. (防水等級：IP68)
 - * IP68：水深一米測試 24 小時 .
 - * Cable OD: $\phi 5.5\text{mm} \sim \phi 12.5\text{mm}$.
 - * Gasket: Silicone ,Gray.
 - * Shell: Zinc Alloy ,Ni Plated ,Silver.
 - * Male Pin: Copper Alloy ,Silver Plated.
 - * Insulation: Nylon ,Black.
 - * One Set Assembled in one PE Bag.

UNIT:mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
		Circular II Series 10 Pin Assy		安費諾亮泰企業股份有限公司		LD20-10BFMA-SL8001	Jessie	2010/05/26
TOLERANCE		SCALE	SHEET			DWG NO	CHECKED BY	DATE
.X ±0.25		Free	1 OF 1			LD20-10BFMA-SL8001	Jimmy	2010/05/27
.XX ±0.1		REV.	SIZE			CUSTOMER	APPROVED BY	DATE
.XXX ±0.05		B	A4			ALTW	Win	2010/06/01
ANGLES ±1°		@C :Inspection Item						8 FMWIO702-01-01A2