
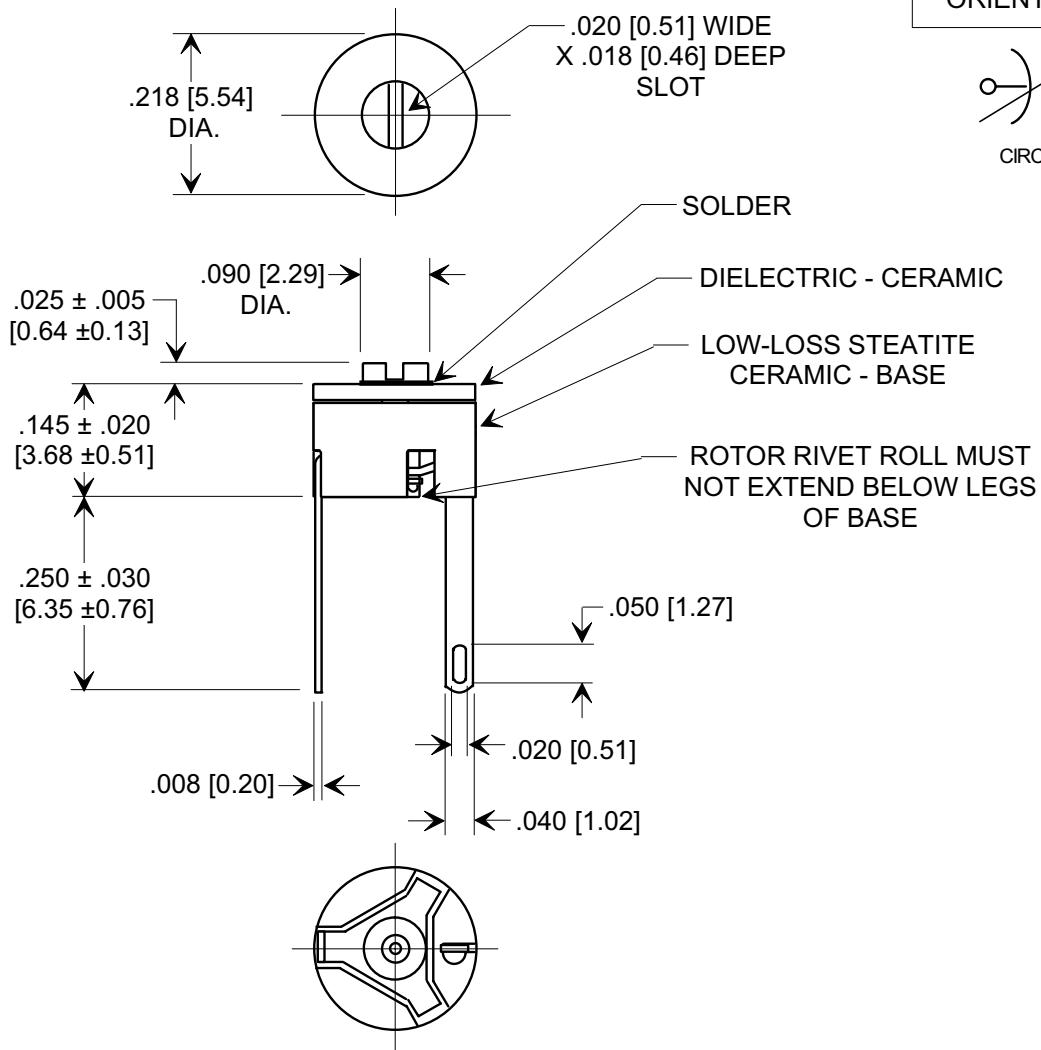


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

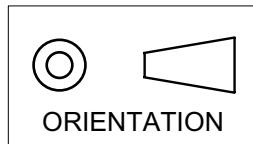

SPECIFICATIONS

TUSONIX PART NO.	518-000 A 2.5-9
Value:	2.5 - 9 pF
Value Tol.:	MIN. + 10%, MAX. -10% +100%
Temp. Coef.:	NPO
Rating:	100 VDC @ 85°C
Operating Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

NOTE:
ALL METAL PARTS SILVER PLATED.

FOR DIMENSIONS \leq .125"/3.18mm,
TOLERANCE IS $\pm .015"$ /0.38mm.

FOR DIMENSIONS \geq .126"/3.20mm,
TOLERANCE IS $\pm .015"$ /0.38mm.

**MINIATURE
CERAMIC TRIMMER**

TOLERANCES
unless otherwise specified

2 PLC.
DECIMAL \pm //

3 PLC.
DECIMAL \pm

ANGLES \pm //

Drawn S.M. 12-03-02

Approved T.C. 12-03-02

TUSONIX
TUCSON, ARIZONA

A 518-000 A 2.5-9

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tusonix:

[0518-000-A-2.5-9LF](#)