
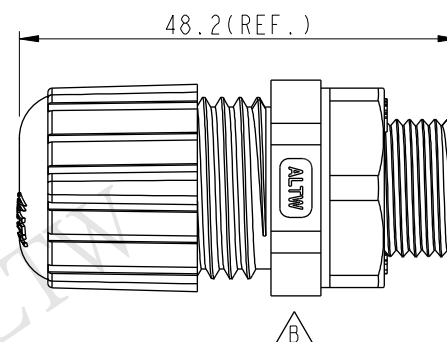
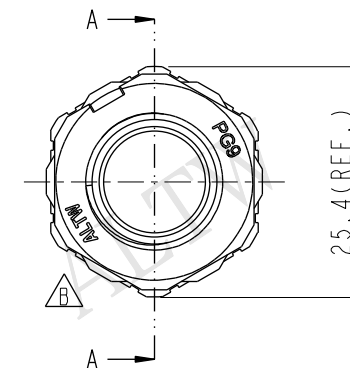
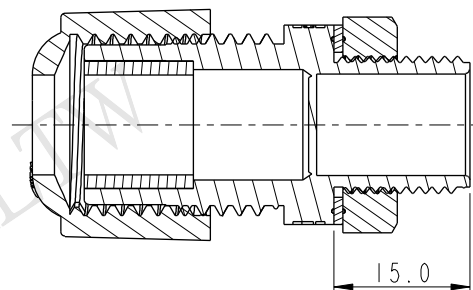


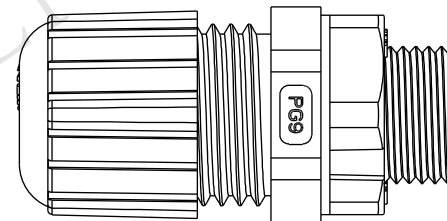



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1570030	2015/05/12	Ruru	Change Logo

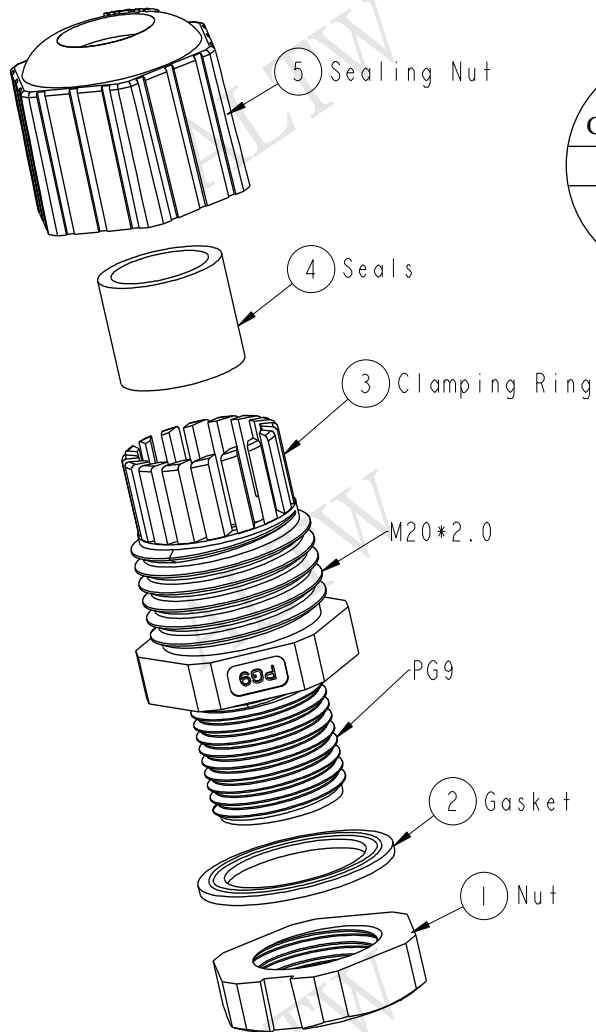

Note:

- * Waterproof Rate: IP68
- * Screw Nut: Nylon, Gray
- * Clamp Ring: Nylon, Gray
- * Sealing Nut: Nylon, Gray
- * Gasket: EPDM, Black
- * Seals: EPDM, Black
- * Cable Range: $\varnothing 6.0 \sim \varnothing 10.0 \text{mm}$
- * For Panel Thickness: 7.5mm max
- * Spanner Size:
Body: 22.0mm
Sealing Nut: 22.9mm
Screw Nut: 22.0mm

UNIT: mm		TITLE		PG9 Gland, Knock Hole		ITEM NO	CSG-09G005	DRAWN BY	Ruru	DATE	2015-05-12
TOLERANCE		SCALE	1:1	SIZE	A4	SHEET	1	OF	1	DATE	2015-05-12
.X ± 0.25		REV.	B	WC-REV.	A.1	QC: Inspection item		CHECKED BY	Rita	DATE	2015-05-12
.XX ± 0.1		Amphenol LTW		安費諾亮泰企業股份有限公司		DWG NO	CSG-09G005	APPROVED BY	Lion	DATE	2015-05-12
.XXX ± 0.05		ALTW		ALTW		CUSTOMER	ALTW				
ANGLES $\pm 1^\circ$											

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.