

5

4

3



2

1



SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ


FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

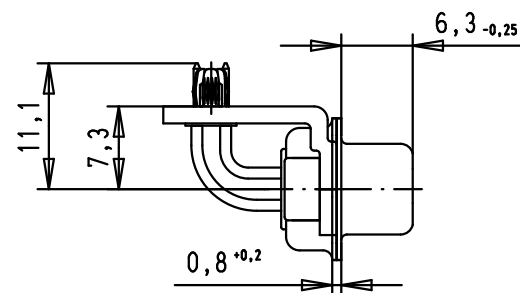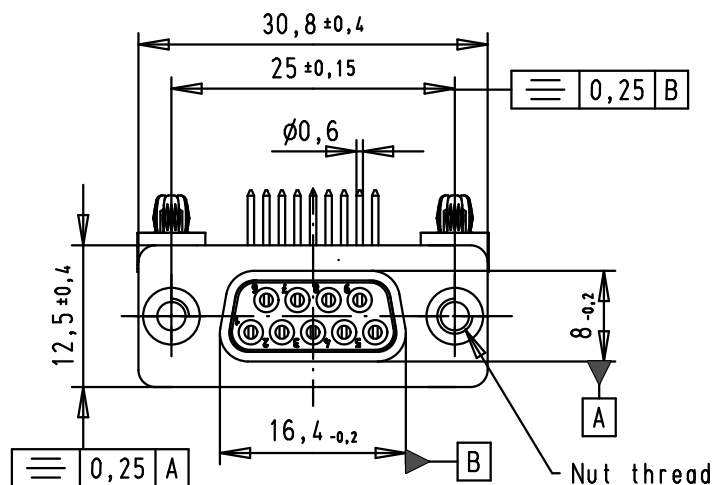

PCB Layout, Component side, thickness 1.6 mm

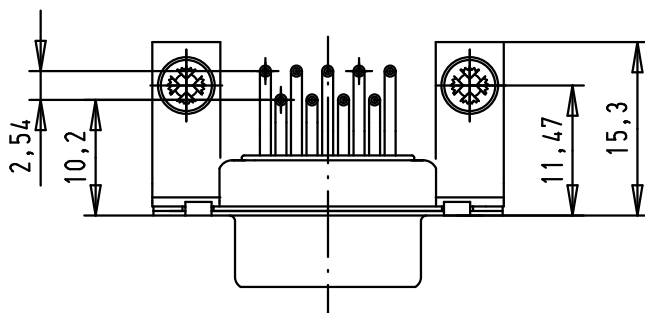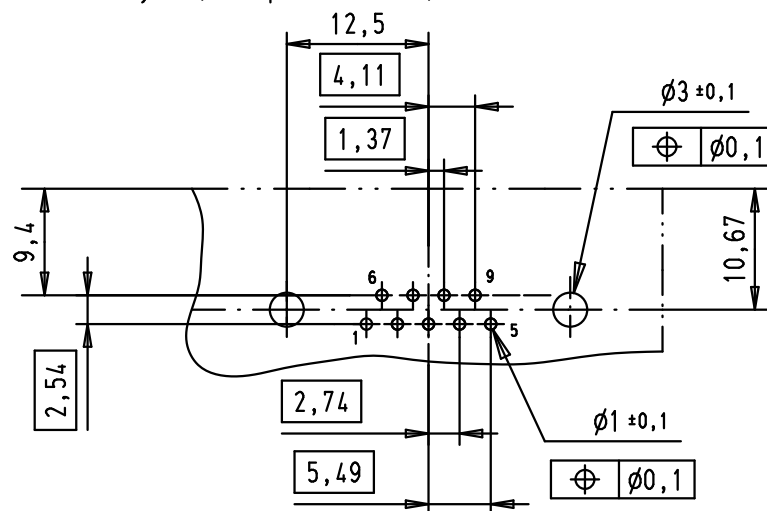

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.	12/01/12	JB
Stand.		



D-Sub, female, angled,
9 Poles, solder pins,
board-locks and clinch nuts

Mo?Mstab/
Scale

1.5:1

09641147243

M3

36283

12/01/12

SD

09641147242

UNC 4-40

33231

07/10/05

JMDR

Part number

Nut thread

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris

TB 0964114724x

Sub.

Blatt/ Page

1 / 4