

4= $2\mu\text{m}$ MIN MATTE TIN FULL PLATED
1.27 μm Ni MINUNDERPLATING

7 – RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.


- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C. PEAK TEMPERATURE FOR 30 SECONDS MAX IN A CONVECTION, INFRA-RED OR VAPOR PHASE OR REFLOW OVEN.

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004




PRINTING METHOD FOR 91615-Y03 UP TO -Y07



YEAR CODE
WEEK CODE
FOR OTHER OPTION
LETTERS SEE SHEET 1
NUMBER OF POS.
PLATING CODE

PDS: Rev :AF STATUS:Released Printed: Oct 29, 2014

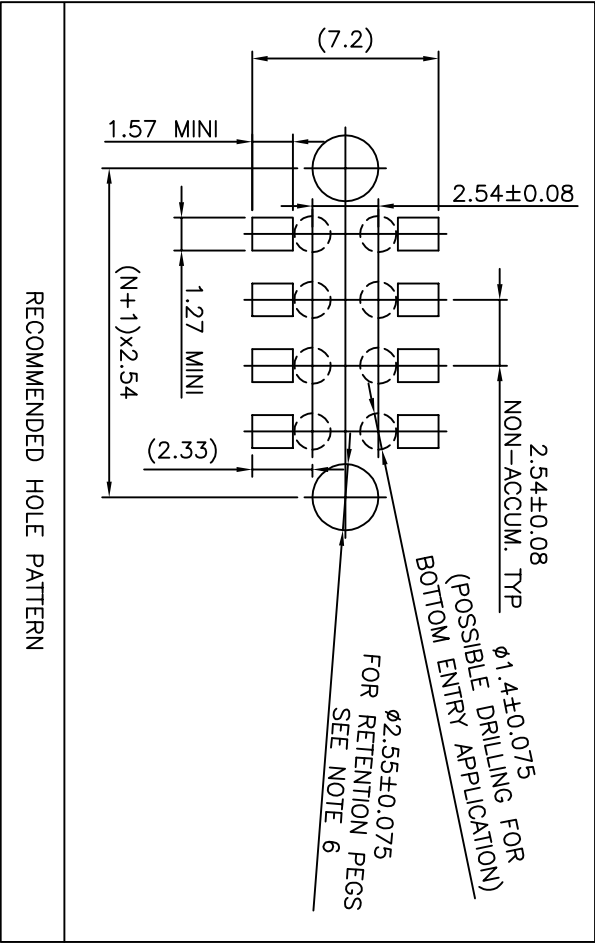

RECOMMENDED HOLE PATTERN

mat'l. code				surface		tolerance		projection		product family	
ltr	ecr no	dr	date	ISO 1302	ISO 406	ISO 1101	ISO 1101	projection	mm	title	DUBOX
A	F04-034	DLE	04.11.10	tolerances unless otherwise specified	±0.3					BtB RECEPT.	
B	F06-020	DLE	06.06.23	angles	linear					VERT DR SMT	
				±2°							
				dr	DLE	04.11.10				dwg no	91615
				engr	P.NZ	04.11.10				sheet 3 of -	A3
				chr	P.NZ	04.11.10				size	
				appd	P.NZ	04.11.10				type	CUSTOMER
sheet	revision									Drawing	
index	sheet										